

CITY OF SCOTTSDALE NOTES

- 1
- \*DOORS AND WINDOWS SHALL BE SEPARATED FROM THE SWIMMING POOL/SPA, BY AN APPROVED POOL BARRIER. IPSC 305.4.
- 2
- \*PLUMBING FIXTURES SHALL COMPLY WITH THE FOLLOWING CONSERVATION REQUIREMENTS: LAVATORY FAUCETS: 1.5 GAL/MINUTE; SHOWER HEADS: 2.0 GAL/MINUTE; KITCHEN FAUCET: 1.8 GAL/MINUTE; WATER CLOSETS: 1.28 GAL/FLUSH. (TABLE P2903.2. AMENDED).
- 3
- \*A DEMAND-CONTROLLED HOT WATER CIRCULATION SYSTEM SHALL BE PROVIDED IN ACCORDANCE WITH SECTION N1103.5.1.1 AMENDED.
- 4
- \*COOL/LIGHT REFLECTIVE COATED ROOFS. ROOF SOLAR REFLECTANCE AND THERMAL EMITTANCE FOR ROOF SLOPES LESS THAN 2:12. THREE-YEAR-AGED SOLAR REFLECTANCE INDEX (SRI) OF 64, THREE-YEAR-AGED SOLAR REFLECTANCE OF 0.55 AND A THREE-YEAR AGED THERMAL EMITTANCE OF 0.75 OVER CONDITIONED AND NON-CONDITIONED SPACES. N1102.6 AMENDED.
- 5
- \*THE BUILDING THERMAL ENVELOPE SHALL COMPLY WITH CLIMATE ZONE 2. ENERGY COMPLIANCE SHALL BE DEMONSTRATED BY UA TRADE-OFF (RESCHECK) OR PERFORMANCE (REM/RATE, ERI, HERS) COMPLIANCE PATH OR BY THE FOLLOWING PRESCRIPTIVE VALUES (TABLE N1102.1.3): PRESCRIPTIVE MINIMUM R-VALUES: (\*CEILING=R-49) / (WALLS=R-13). PRESCRIPTIVE MAXIMUM WINDOW FENESTRATION VALUES: (U-FACTOR=0.40) / (SHGC=0.25).
- 6
- \*EXTERIOR LIGHTING OVER 30 WATTS SHALL INCLUDE AN AUTOMATIC SHUT-OFF. (N1104.3).
- 7
- \*ALL PERMANENTLY INSTALLED LIGHTING FIXTURES SHALL CONTAIN ONLY HIGH-EFFICACY LAMPS. (N1104.1).
- 8
- \*ALL PERMANENTLY INSTALLED INTERIOR LIGHTING FIXTURES SHALL BE CONTROLLED WITH EITHER A DIMMER, AN OCCUPANT SENSOR CONTROL OR OTHER CONTROL SUCH AS AN AUTOMATIC TIMER SHUT-OFF SWITCH. EXCEPTIONS INCLUDE BATHROOMS AND HALLWAYS. (N1104.2).
- 9
- \*E3606.5 SURGE PROTECTION. ALL ELECTRICAL SERVICES SUPPLYING ONE- AND TWO-FAMILY DWELLING UNITS SHALL BE PROVIDED WITH A SURGE PROTECTIVE DEVICE (SPD) INSTALLED IN ACCORDANCE WITH SECTIONS E3606.5.1 THROUGH E3606.5.3.
- 10
- \*ELECTRIC VEHICLE CHARGING CAPACITY. RESERVE ELECTRICAL SERVICE PANEL SPACE FOR A FULL SIZE 2-POLE CIRCUIT BREAKER LABELED "FUTURE EV CHARGING". A RACEWAY SHALL BE INSTALLED FROM THE ELECTRICAL SERVICE PANEL TO A LOCATION WITHIN THE GARAGE, WHERE IT SHALL TERMINATE IN A JUNCTION BOX OR OUTLET AND BE LABELED "FUTURE EV CHARGING".
- 11
- \*SOLAR-READY ZONES – RB103. MINIMUM 10% OF ROOF AREA BUT NOT LESS THAN 300 SQ. FT. FREE AND CLEAR OF OBSTRUCTIONS INCLUDING MECHANICAL EQUIPMENT AND VENTS. PROVIDE ELECTRICAL PATHWAY FOR CONDUIT RUN FROM SOLAR-READY ZONE TO ELECTRICAL SERVICE PANEL WITH RESERVED SPACE FOR 2-POLE CIRCUIT BREAKER. CAPPED ROOF PENETRATION SLEEVE SHALL BE PROVIDED ON ROOFS WITH A SLOPE OF 1 IN 12 OR LESS.
- 12
- \*THE FOLLOWING THREE NOTES ARE APPLICABLE TO NEW CONSTRUCTION ONLY (BPI CERTIFIED PROFESSIONALS ARE APPROVED FOR TESTING AIR LEAKAGE IN EXISTING BUILDINGS, OTHERWISE RESNET PROFESSIONALS ARE APPROVED FOR NEW AND EXISTING):
- 13
- \*THE BUILDING SHALL BE PROVIDED WITH A WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM THAT MEETS THE REQUIREMENTS OF SECTION M1505. OUTDOOR AIR INTAKES AND EXHAUSTS SHALL HAVE AUTOMATIC OR GRAVITY DAMPERS THAT CLOSE WHEN THE VENTILATION SYSTEM IS NOT OPERATING. (N1103.6).
- 14
- \*THE BUILDING OR DWELLING UNIT SHALL BE TESTED AND VERIFIED AS HAVING AN AIR LEAKAGE RATE NOT EXCEEDING FIVE AIR CHANGES PER HOUR FOR DETACHED DWELLING UNITS AND SEVEN AIR CHANGES PER HOUR FOR ATTACHED DWELLING UNITS. TESTING SHALL BE CONDUCTED IN ACCORDANCE WITH ASTM E 779 OR ASTM E 1827 AND REPORTED AT A PRESSURE OF 0.2 INCH W.G. (50 PASCALS). TESTING SHALL BE CONDUCTED BY AN APPROVED THIRD PARTY (RESNET CERTIFIED). A WRITTEN REPORT OF THE RESULTS OF THE TEST SHALL BE SIGNED BY THE PARTY CONDUCTING THE TEST AND PROVIDED TO THE CODE OFFICIAL. TESTING SHALL BE PERFORMED AT ANY TIME AFTER CREATION OF ALL PENETRATIONS OF THE BUILDING THERMAL ENVELOPE. (N1102.4.1.2).
- 15
- \*DUCTS, AIR HANDLERS, AND FILTER BOXES SHALL BE SEALED IN ACCORDANCE WITH N1103.3.4. JOINTS AND SEAMS SHALL COMPLY WITH SECTION M1601.4.1. DUCTS SHALL BE PRESSURE TESTED TO DETERMINE LEAKAGE BY ONE OF THE FOLLOWING METHODS (N1103.3.5):
- 16
- ROUGH-IN TEST: TOTAL LEAKAGE SHALL BE MEASURED WITH A PRESSURE DIFFERENTIAL OF 0.1 INCHES W.G. (25 PA) ACROSS THE SYSTEM, INCLUDING THE MANUFACTURER'S AIR HANDLER ENCLOSURE IF INSTALLED AT THE TIME OF THE TEST. ALL REGISTERS SHALL BE TAPED OR OTHERWISE SEALED DURING THE TEST.
- 17
- POST-CONSTRUCTION TEST: TOTAL LEAKAGE SHALL BE MEASURED WITH A PRESSURE DIFFERENTIAL OF 0.1 INCHES W.G. (25 PA) ACROSS THE SYSTEM, INCLUDING THE MANUFACTURER'S AIR HANDLER ENCLOSURE. REGISTERS SHALL BE TAPED OR OTHERWISE SEALED DURING THE TEST.
- 18
- \*A WRITTEN REPORT OF THE RESULTS SHALL BE SIGNED BY THE PARTY CONDUCTING THE TEST AND PROVIDED TO THE CODE OFFICIAL PRIOR TO THE FINAL BUILDING INSPECTION.

- 19
- \*ALL PRODUCTS LISTED BY AN EVALUATION SERVICE REPORT (ESR) SHALL BE INSTALLED PER THE REPORT AND THE MANUFACTURES WRITTEN INSTRUCTIONS. PRODUCT SUBSTITUTIONS SHALL ALSO BE LISTED BY AN ESR.
- 20
- \*PROVIDE FIRE SPRINKLER SYSTEM PER SCOTTSDALE FIRE CODE (IRC R313 AMENDED).
- 21
- \*SEPARATE PERMITS REQUIRED: POOLS, SPAS, FENCES, SITE WALLS, RETAINING WALLS, AND GAS STORAGE TANKS.
- 22
- \*FOUNDATION & FOOTING DEPTH SHALL BE A MINIMUM OF 18 INCHES BELOW GRADE (OR PER PROPERTY SOIL REPORT), PROVIDE A MINIMUM OF 3-INCH CLEARANCE BETWEEN REBAR AND SOIL. (R403.1 AMENDED).
- 23
- \*DOORS BETWEEN THE GARAGE AND RESIDENCE SHALL BE SELF-CLOSING MINIMUM 1 3/8" THICK SOLID CORE OR 20-MINUTE FIRE RATED. (R302.5.1).
- 24
- \*WOOD SILL PLATES SHALL BE PRESSURE TREATED OR DECAY RESISTANT. EXTERIOR SILL PLATES SHALL BEAR A MINIMUM OF 6 INCHES ABOVE FINISH GRADE. (R317.1).
- 25
- \*GYPSUM BOARD APPLIED TO A CEILING SHALL BE 1/2" WHEN FRAMING MEMBERS ARE 16" O.C. OR 5/8" WHEN FRAMING MEMBERS ARE 24" O.C. OR USE LABELED 1/2" SAG-RESISTANT GYPSUM CEILING BOARD. (TABLE R702.3.5 (D)).
- 26
- \*SHOWERS AND TUB-SHOWER COMBINATIONS SHALL BE PROVIDED WITH INDIVIDUAL CONTROL VALVES OF THE PRESSURE BALANCE OR THERMOSTATIC MIXING VALVE TYPE. (P2708.4).
- 27
- \*SHOWER AREA WALLS SHALL BE FINISHED WITH A SMOOTH, HARD NON-ABSORBENT SURFACE, SUCH AS CERAMIC TILE, TO A HEIGHT OF NOT LESS THAN 72 INCHES ABOVE THE DRAIN INLET. CEMENT, FIBER-CEMENT, OR GLASS MAT GYPSUM BACKERS INSTALLED IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS SHALL BE USED AS BACKERS FOR WALL TILE IN TUB AND SHOWER AREAS AND WALL PANELS IN SHOWER AREAS. (R702.4.2).
- 28
- \*STORAGE-TANK TYPE WATER HEATERS SHALL BE INSTALLED WITH A DRAIN PAN AND DRAIN LINE. (P2801.6).
- 29
- \*PROVIDE ROOF/ATTIC VENTILATION UNLESS INSULATION IS APPLIED DIRECTLY TO UNDERSIDE OF THE ROOF-SHEATHING, OR THE DEPTH IS 24 INCHES OR LESS BETWEEN THE CEILING AND BOTTOM OF ROOF SHEATHING. (R806.1 AMENDED
- 30
- ALL BRANCH CIRCUITS THAT SUPPLY 15- AND 20-AMPERE OUTLETS INSTALLED IN KITCHENS, FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DENS, BEDROOMS, SUNROOMS, RECREATIONS ROOMS, CLOSETS, HALLWAYS, LAUNDRY AREAS AND SIMILAR ROOMS OR AREAS SHALL BE PROTECTED BY A COMBINATION TYPE ARC-FAULT CIRCUIT INTERRUPTER (AFCI) INSTALLED TO PROVIDE PROTECTION OF THE BRANCH CIRCUIT. (E3902.12).
- 31
- GENERAL PURPOSE 15- AND 20-AMPERE RECEPTACLES SHALL BE LISTED TAMPER-RESISTANT. (E4002.14).
- 32
- PROVIDE INTERCONNECTED AND HARDWIRED SMOKE ALARMS IN NEW AND EXISTING AREAS OF HOME. (R314).
- 33
- APPROVED CARBON MONOXIDE ALARMS, HARDWIRED AND INTERCONNECTED, SHALL BE INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA IN THE IMMEDIATE VICINITY OF THE BEDROOMS IN DWELLING UNITS WITHIN WHICH FUEL-FIRED APPLIANCES ARE INSTALLED AND IN DWELLING UNITS THAT HAVE ATTACHED GARAGES. (R315).
- 34
- RECESSED LUMINAIRES INSTALLED IN THE BUILDING THERMAL ENVELOPE SHALL BE IC-RATED AND LABELED AS HAVING AN AIR LEAKAGE RATE NOT MORE THAN 2.0 CFM. ALL RECESSED LUMINAIRES SHALL BE SEALED WITH A GASKET OR CAULK BETWEEN THE HOUSING AND THE INTERIOR WALL OR CEILING COVERING. (N1102.4.5).
- 35
- PROVIDE ILLUMINATION WITH WALL SWITCHES FOR STAIRWAYS WHEN THERE ARE 6 OR MORE RISERS. (R303.7).
- 36
- RECEPTACLE OUTLETS SHALL BE INSTALLED SO THAT NO POINT ALONG THE FLOOR LINE IN ANY WALL SPACE IS MORE THAN 6 FEET, MEASURED HORIZONTALLY, FROM AN OUTLET IN THAT SPACE, INCLUDING ANY WALL SPACE 2 FEET OR MORE IN WIDTH. (E3901.2).
- 37
- PROVIDE A MINIMUM OF TWO 20-AMP SMALL APPLIANCE BRANCH CIRCUITS FOR THE KITCHEN/DINING/BREAKFAST. (E3703.2).
- 38
- PROVIDE OUTSIDE COMBUSTION AIR TO ALL INDOOR FIREPLACES PER MANUFACTURES SPECIFICATIONS. (R1006.1).
- 39
- AT LEAST ONE THERMOSTAT SHALL BE PROVIDED FOR EACH SEPARATE HEATING AND COOLING SYSTEM. (N1103.1).

SITE PLAN

APPROVED

BY THE CITY OF SCOTTSDALE PLAN REVIEW DEPARTMENT

4752-25  
PLAN CHECK NUMBER

Hmushtaq  
APPROVED BY

02/19/26  
DATE

CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL

GENERAL NOTES

- 1
- DO NOT SCALE DRAWINGS
- 2
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C., INTERIOR WALLS USE 2X4 STUDS @ 16" O.C., UNLESS NOTED OTHERWISE (U.N.O.)
- 3
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER BEAMS/HEADERS SPANNING UP TO 6'-0" AND (2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- 4
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO UNDERSIDE OF ROOF DECK. EXTEND SHEATHING OVER TRUSS FACE AS REQUIRED.
- 5
- ONE KOTE STUCCO VENEER - ESR-1471
- 6
- GAF BUILT-UP FLAT ROOF - ESR-4676
- 7
- SPRAY FOAM INSULATION - CCCR-1011

SHEET INDEX

|      |                          |
|------|--------------------------|
| A000 | CITY NOTES - SHEET INDEX |
| A101 | DEMO SITE PLAN           |
| A102 | NEW SITE PLAN            |
| A103 | FLOOR PLAN               |
| A104 | CEILING PLAN             |
| A105 | ROOF PLAN                |
| A106 | ELEVATIONS               |
| A107 | SECTIONS                 |
| A108 | PLUMBING PLAN            |
| A109 | MECHANICAL PLAN          |
| A110 | GAS                      |
| E001 | ELECTRICAL               |
| E002 | POWER PLAN               |
| S000 | STRUCTURAL NOTES         |
| S001 | FOUNDATION PLAN          |
| S002 | FRAMING PLAN             |
| S003 | STRUCTURAL DETAILS       |

SWENKA RESIDENCE

12228 N 66TH ST

CITY NOTES

|                |            |
|----------------|------------|
| Project number | 04003      |
| Date           | 08/31/2017 |
| Drawn by       | Author     |
| Checked by     | Checker    |

A000

Scale 12" = 1'-0"

AS NOTED:  
See Sheet E001

BUILDING PLAN

APPROVED

BY CITY OF SCOTTSDALE PLAN REVIEW

4752-25  
PLAN CHECK NO.

Mirel Cristian  
REVIEWER

02/19/2026  
DATE

CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL

SPRINKLER SYSTEM REQUIRED IN THIS BUILDING BEFORE APPROVAL BY SCOTTSDALE FIRE DEPARTMENT

DEFERRED SUBMITTAL FOR PREMANUFACTURED TRUSS DESIGNS

PLAN CHECK #: 4752-25

WATER METER SIZE: 1" min

BUILDING SUPPLY LINE (INSIDE PIPE DIAMETER): 1-1/4" min

AN APPROVED TYPE PRESSURE REGULATOR PRECEDED BY AN ADEQUATE STRAINER SHALL BE INSTALLED.




CITY OF SCOTTSDALE  
BUILDING PLANS  
THESE PLANS HAVE BEEN REVIEWED  
AND ARE READY FOR A PERMIT.  
THIS DOES NOT AUTHORIZE VIOLATIONS OF ANY  
CODE OR ORDINANCE

# GRADING & DRAINAGE PLAN

A PORTION OF THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 15,  
TOWNSHIP 3 NORTH, RANGE 4 EAST OF THE G.&S.R.B.&M., MARICOPA COUNTY, ARIZONA.  
DESERT ESTATES 4 - LOT 1

## DETAIL "A"

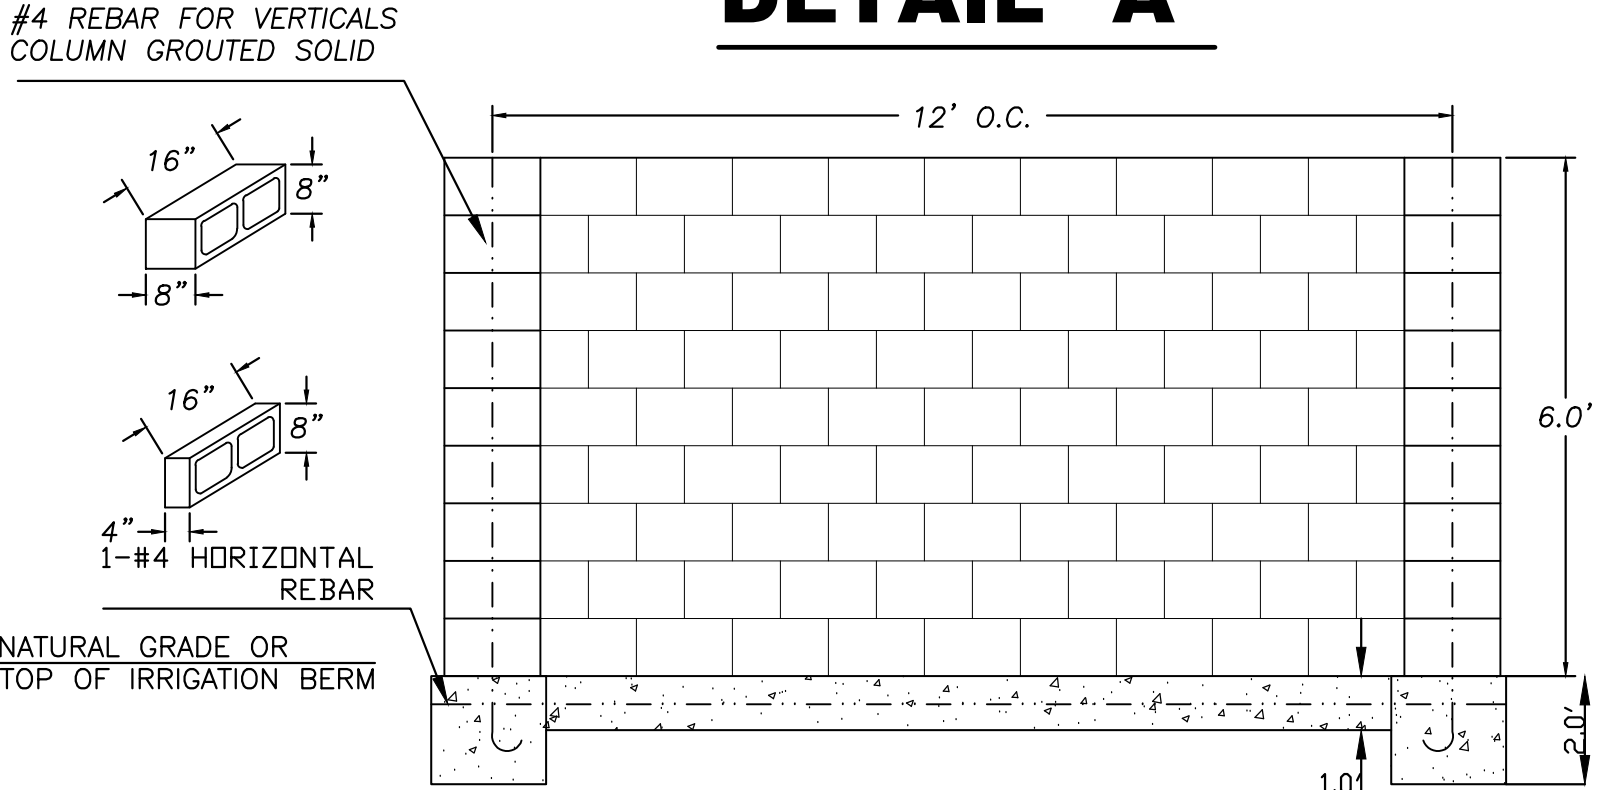

## CMU BLOCK WALL NTS

### SITE PLAN NOTES:

1. POOLS REQUIRE SEPARATE APPROVAL AND PERMIT.
2. POOLS SHALL NOT BE EMPTIED OR BACKWASHED INTO WASHES, STREETS, ONTO AN ADJACENT LOT, OR TRACT OF LAND.
3. ALL MECHANICAL EQUIPMENT (AIR CONDITIONER, POOL EQUIPMENT, ETC.) SHALL BE SCREENED A MINIMUM ONE (1) FOOT HIGHER THAN THE HIGHEST PORTION OF THE EQUIPMENT FROM ALL SIDES, AND SHALL BE COMPATIBLE WITH THE ADJACENT MAIN BUILDING.
4. A GUESTHOUSE SHALL NEVER BE OFFERED FOR RENT.
5. A GUEST HOUSE OR ACCESSORY STRUCTURE SHALL NOT EXCEED A GROSS FOOTPRINT SIZE GREATER 50% OF THE FOOT PRINT SIZE OF THE PRINCIPAL BUILDING.
6. ANY PROPOSED MODIFICATIONS TO NATURAL WATERCOURSES AND ALL WALLS AND FENCES CROSSING NATURAL WATERCOURSES SHALL BE DESIGNED IN ACCORDANCE WITH THE STANDARDS AND POLICIES SPECIFIED IN CHAPTER 37 OF THE SCOTTSDALE REVISED CODE.
7. TEMPORARY/SECURITY FENCING THAT IS REQUIRED OR IS OPTIONALLY PROVIDED SHALL BE IN ACCORDANCE WITH THE ZONING ORDINANCE AND THE DESIGN STANDARDS AND POLICIES MANUAL.

### SCOTTSDALE FIRE LINE ACCESS REQUIREMENTS

| ACCESS GRADES FROM 0% TO 12% FOR ONE SINGLE FAMILY RESIDENCE |           | HOSE                |                    | SPRINKLER |     |
|--------------------------------------------------------------|-----------|---------------------|--------------------|-----------|-----|
| DRIVE                                                        | DRIVE     | TURN-A-ROUND        | LAY                | MOD-130   | YES |
| LENGTH LESS THAN 200 FEET                                    | WIDTH 24' | SURFACE REQUIRED NO | LESS THAN 200 FEET |           |     |

### FLOOD INSURANCE RATE MAP (FIRM) INFORMATION


| COMMUNITY NUMBER | PANEL NUMBER | SUFFIX | DATE OF FIRM (INDEX DATE) | FIRM ZONE | BASE FLOOD ELEVATION (IN AO ZONE, USE DEPTH) |
|------------------|--------------|--------|---------------------------|-----------|----------------------------------------------|
| 045012           | 1755         | L      | 10/16/2013                | X         | N/A                                          |

### ENGINEERS CERTIFICATION


THE LOWEST FLOOR ELEVATION ON THIS PLAN ARE SUFFICIENTLY HIGH TO PROVIDE PROTECTION FROM FLOODING CAUSED BY THE 100 YEAR STORM, AND ARE IN ACCORDANCE WITH CITY OF SCOTTSDALE REVISED CODE, CHAPTER 37, FLOODWAYS FLOOD PLAIN ORDINANCE.

### DRAINAGE NOTE

THE PAD ELEVATIONS OF ALL A/C AND/OR ELECTRO-MECHANICAL UNITS WILL BE SET REASONABLY HIGHER THAN THE ADJACENT GRADES TO PROVIDE FLOOD PROTECTION UNDER THE 100-YEAR STORM EVENT.

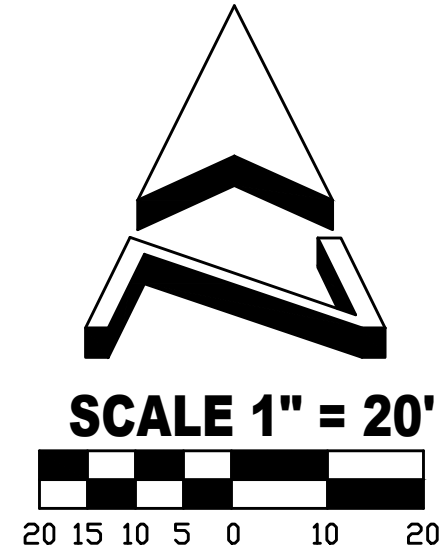

APN: 175-08-008  
STEWART DEVIN F/EMILY A

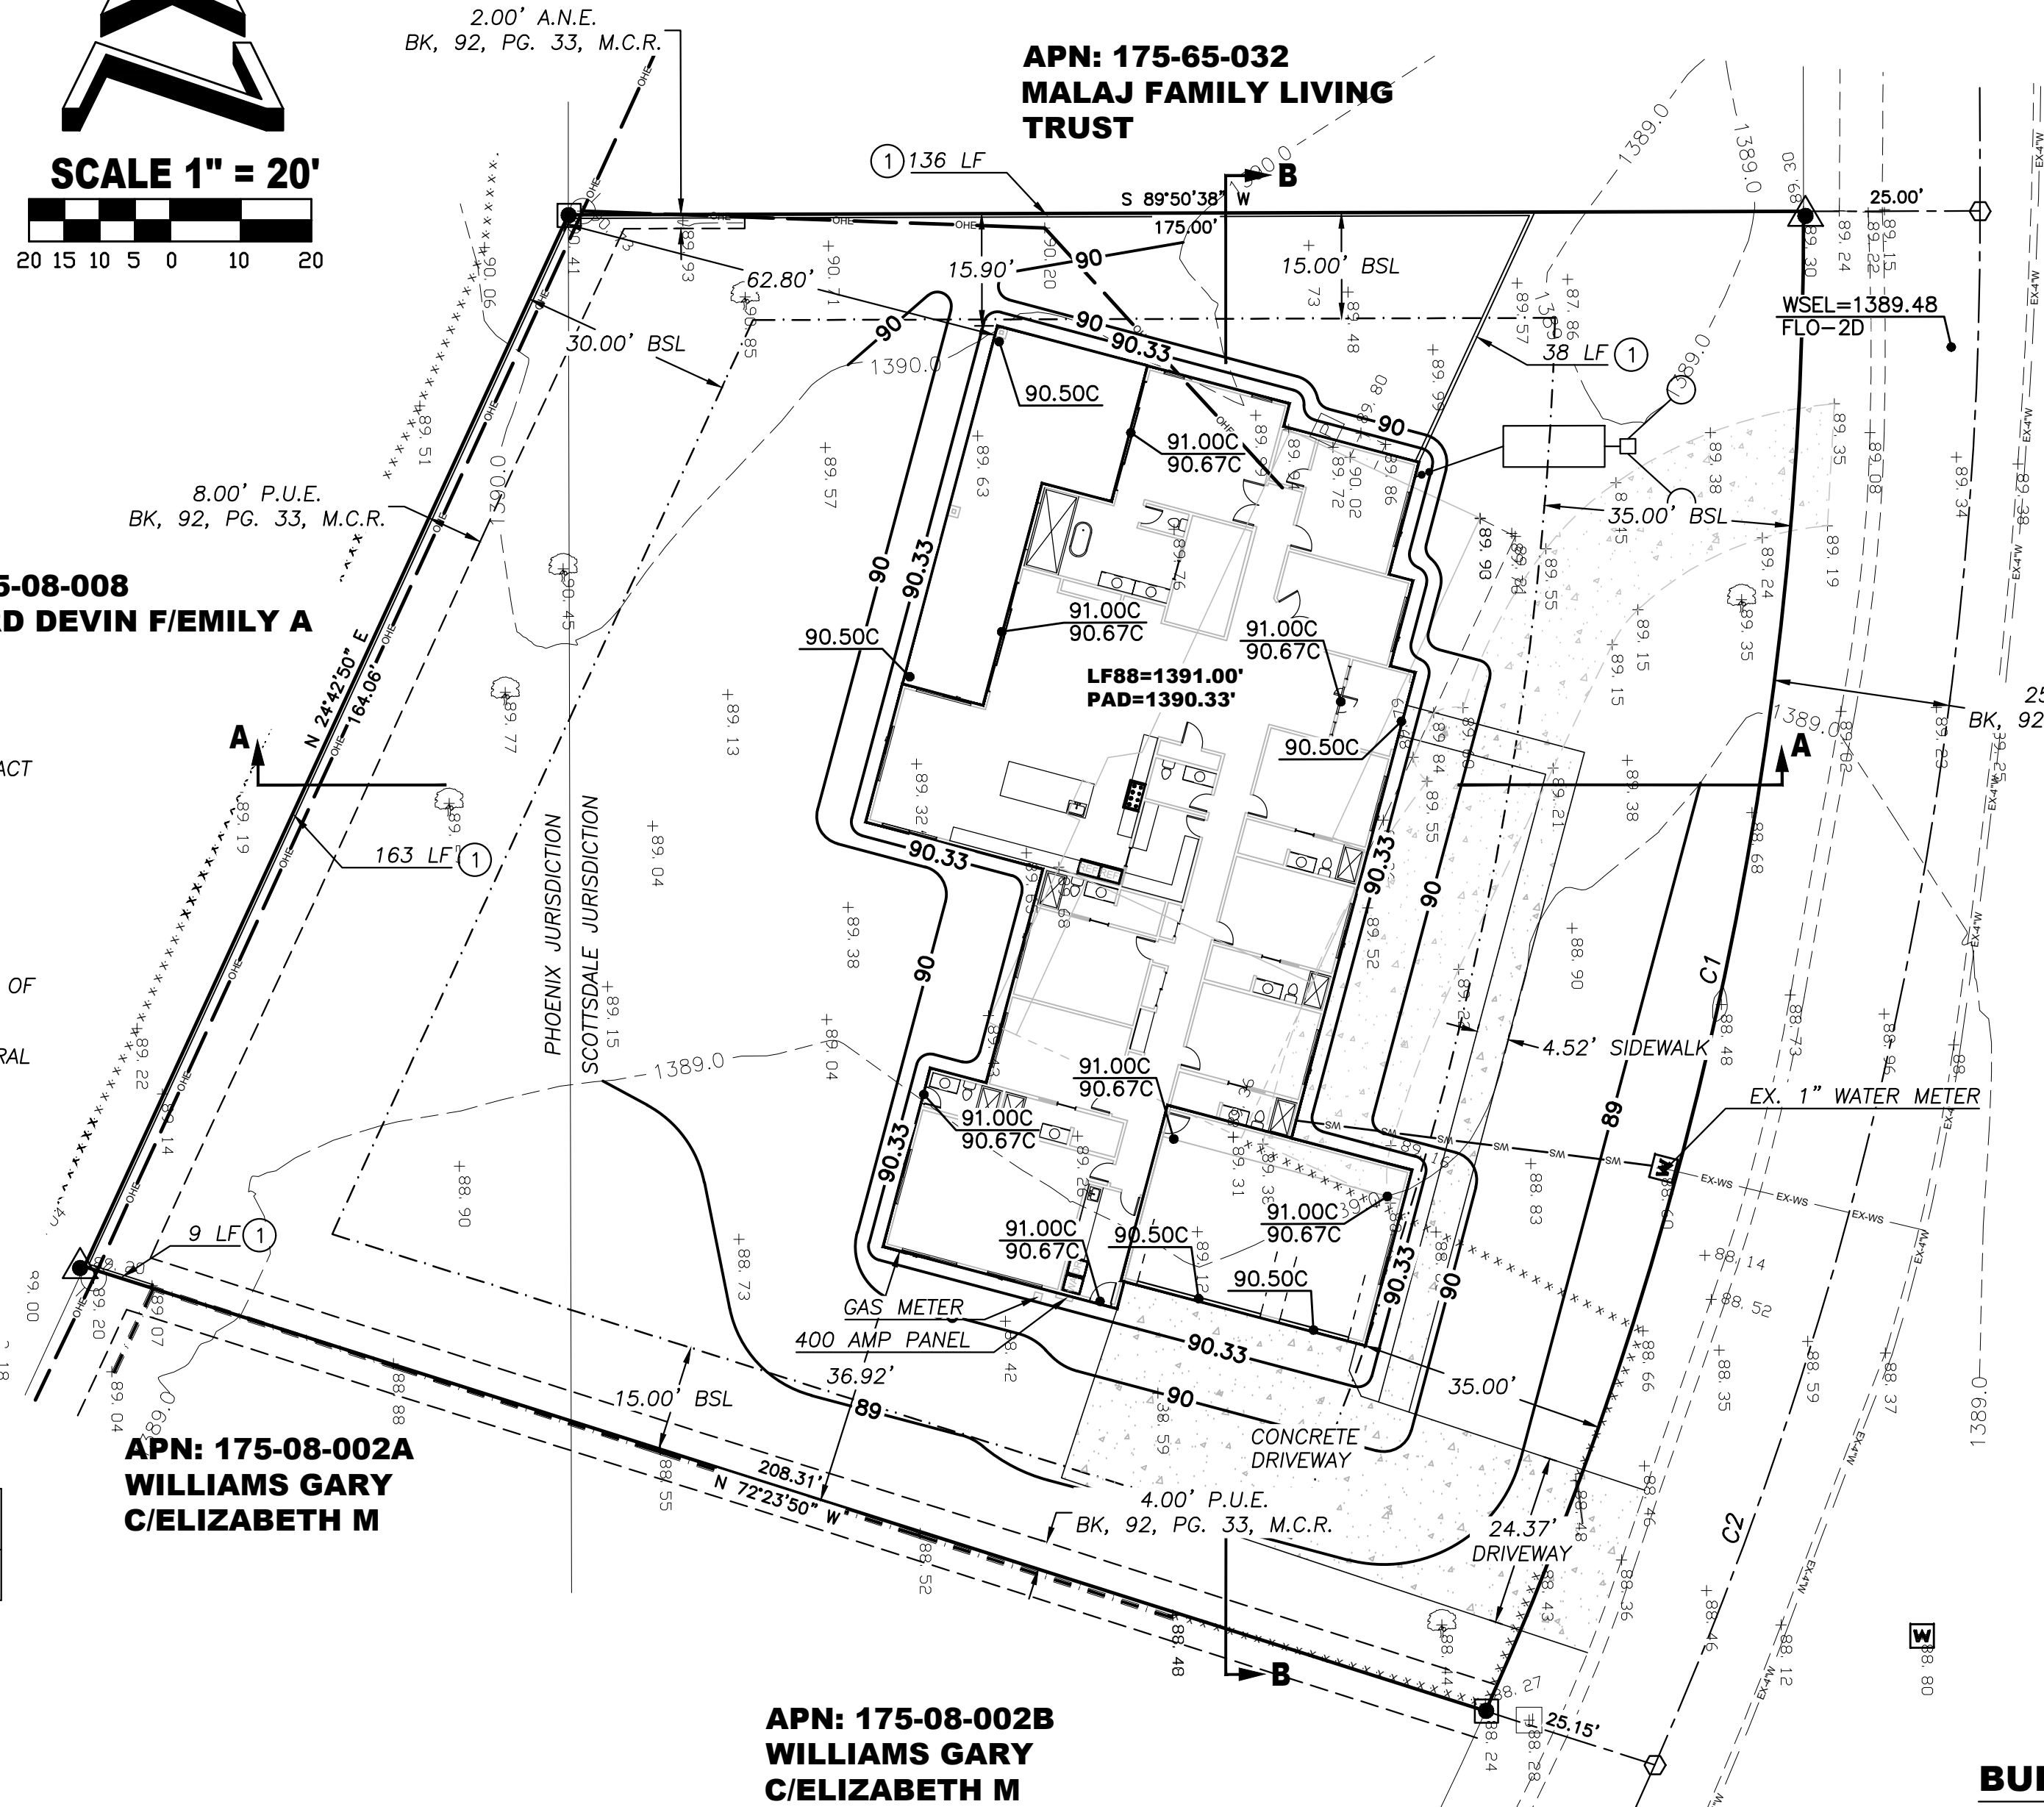

CONSTRUCTION NOTES  
① INSTALL 6' CMU WALL PER DETAIL ON PLAN.

### LEGEND

- FOUND 1/2" REBAR
- FOUND PIPE IN HAND HOLE
- NOTHING FOUND/NOTHING SET
- M.C.R. MARICOPA COUNTY RECORDER
- WATER SERVICE/WATER METER
- POWER POLE
- TELECOM JUNCT. BOX
- POWER METER
- CONCRETE
- PUE PUBLIC UTILITY EASEMENT
- ROW RIGHT OF WAY
- BSL BUILDING SETBACK LINE
- OHE--OHE--OHE- EXISTING OVERHEAD ELECTRIC
- EX-4"W--EX-4"W- EXISTING 4" WATERLINE
- TREE
- C CONCRETE
- G GROUND
- LF88 LOWEST FLOOR (NAVD 88)

### WALL CALCULATIONS

L.F. OF CMU WALLS= 247 L.F.

### QUANTITIES NOTE

QUANTITIES LISTED AND SHOWN HEREON ARE FOR ENGINEER'S USE ONLY. THE CONTRACTOR SHALL MAKE HIS OWN DETERMINATION OF THE QUANTITIES AND BASE HIS BID ON HIS OWN ESTIMATE.

### OWNER

RS AHCS LLC  
1622 PALMCROFT DR SE  
PHOENIX AZ 85007

### LEGAL DESCRIPTION

LOT 1, DESERT ESTATES UNIT FOUR, ACCORDING TO THE PLAT OF RECORD IN THE OFFICE OF THE COUNTY RECORDER OF MARICOPA COUNTY, ARIZONA, IN BOOK 92 OF MAPS, PAGE 33.

### SITE DATA

APN: 175-08-001A & 175-08-001B  
ZONING: R1-35  
AREA = 37,221 SF  
0.8542 AC  
QS: 31-43

### BENCHMARK

FOUND 3" SCOTTSDALE BCH# 1' DN NO STAMPING AT THE INTERSECTION OF CACTUS RD AND 64TH STREET. MCDOT POINT #2359 ELEVATION = 1,383.503 (NAVD88)

### CERTIFICATION


I HEREBY CERTIFY THAT ALL ELEVATIONS REPRESENTED ON THIS PLAN ARE BASED ON NAVD 1988 AND MEET THE FEMA BENCHMARK MAINTENANCE (BMM) CRITERIA.

Cutter A. Zaugg 06/12/2025  
CUTTER ZAUGG DATE

### BUILDING SQUARE FOOTAGE

|                 |            |
|-----------------|------------|
| HOME            | 6,078 S.F. |
| FRONT PATIO     | 120 S.F.   |
| REAR PATIO      | 823 S.F.   |
| GARAGE          | 923 S.F.   |
| TOTAL FOOTPRINT | 7,944 S.F. |
| LOT COVERAGE    | 21.3 %     |

| CURVE DATA:  |           |         |            |
|--------------|-----------|---------|------------|
| Curve Number | Delta     | Radius  | Arc Length |
| C2           | 46°20'05" | 19.97'  | 16.15'     |
| C1           | 29°01'56" | 375.00' | 190.02'    |

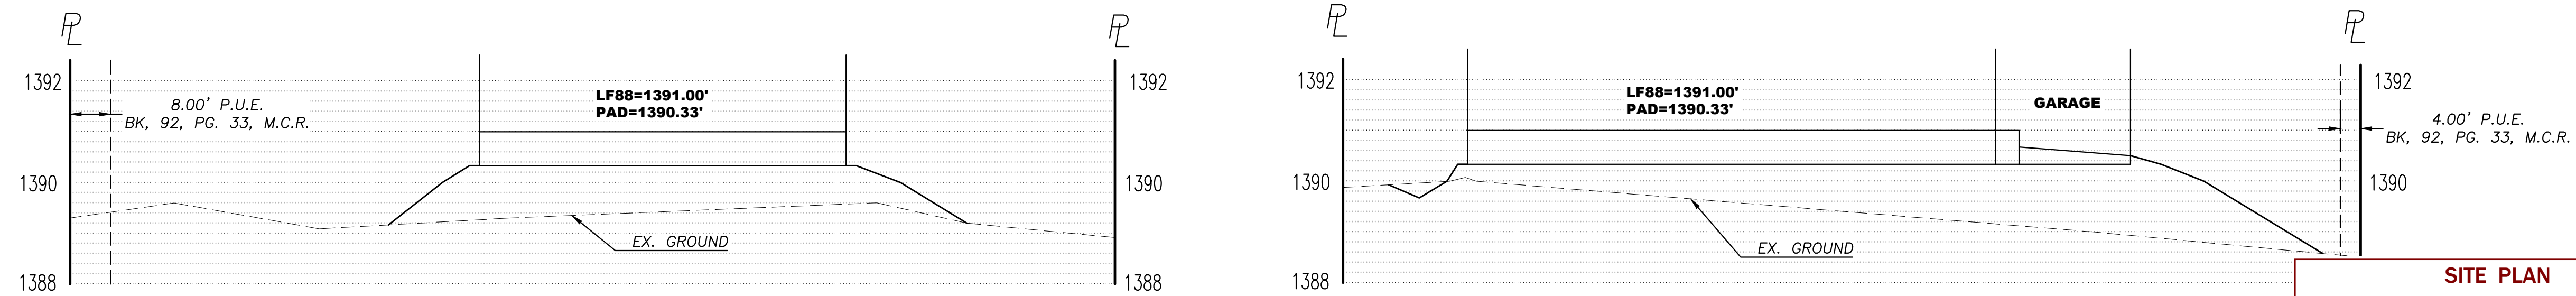

## SECTION A-A

SCALE 1"= 20' HORIZONTAL  
SCALE 1"= 2' VERTICAL

## SECTION B-B

SCALE 1"= 20' HORIZONTAL  
SCALE 1"= 2' VERTICAL

SITE PLAN  
APPROVED  
BY THE CITY OF SCOTTSDALE PLANNING DEPARTMENT


4752-25 PLAN CHECK NO. 02/19/2026 DATE  
CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL

### SITE PLAN APPROVED

BY CITY OF SCOTTSDALE PLAN REVIEW

4752-25 rdalton 02/19/2026  
PLAN CHECK NO. REVIEWER DATE

CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL

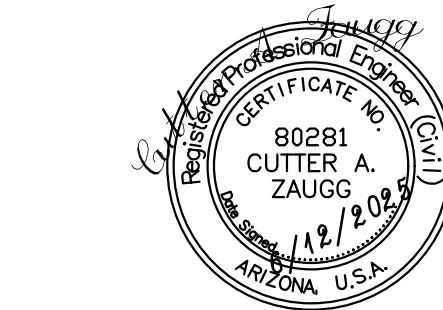

Q.S. 31-43

| DATE |
|------|
|      |



ALLEN CONSULTING ENGINEERS, INC.  
4111 E. VALLEY AUTO DRIVE, SUITE 103  
MESA, ARIZONA 85206  
PHONE (480) 844-1666  
E-MAIL: ace@allenconsultengr.com

APN #175-08-001B  
12228 N 66TH STREET  
SCOTTSDALE, ARIZONA 85254  
GRADING & DRAINAGE PLAN

|            |       |            |            |
|------------|-------|------------|------------|
| JOB NUMBER | 98348 | SHEET      | 1 OF 1     |
| DRAWING    | G&D   | CHECKED BY |            |
| DRAFTSMAN  |       | DATE       | 06/12/2025 |

4752-25



PROJECT DESCRIPTION



NEW SINGLE FAMILY RESIDENCE - 6 BED, 7 BATH, 3-CAR GARAGE W/  
COVERED PATIO, GAS LINES, & 400 AMP PANEL

OWNERS: RS AHCS LLC  
PHONE: (303) 807-1191

PROPERTY INFO

ADDRESS: 12228 N 66TH ST  
SCOTTSDALE, AZ 85254  
APN: 175-08-001B  
Q-S #: 92-33  
MCR #: 9233  
LOT #: 1  
SUB-DIV: DESERT ESTATES 4  
ZONING: R1-35  
LOT SIZE: 31,350 SF

SITE MAP

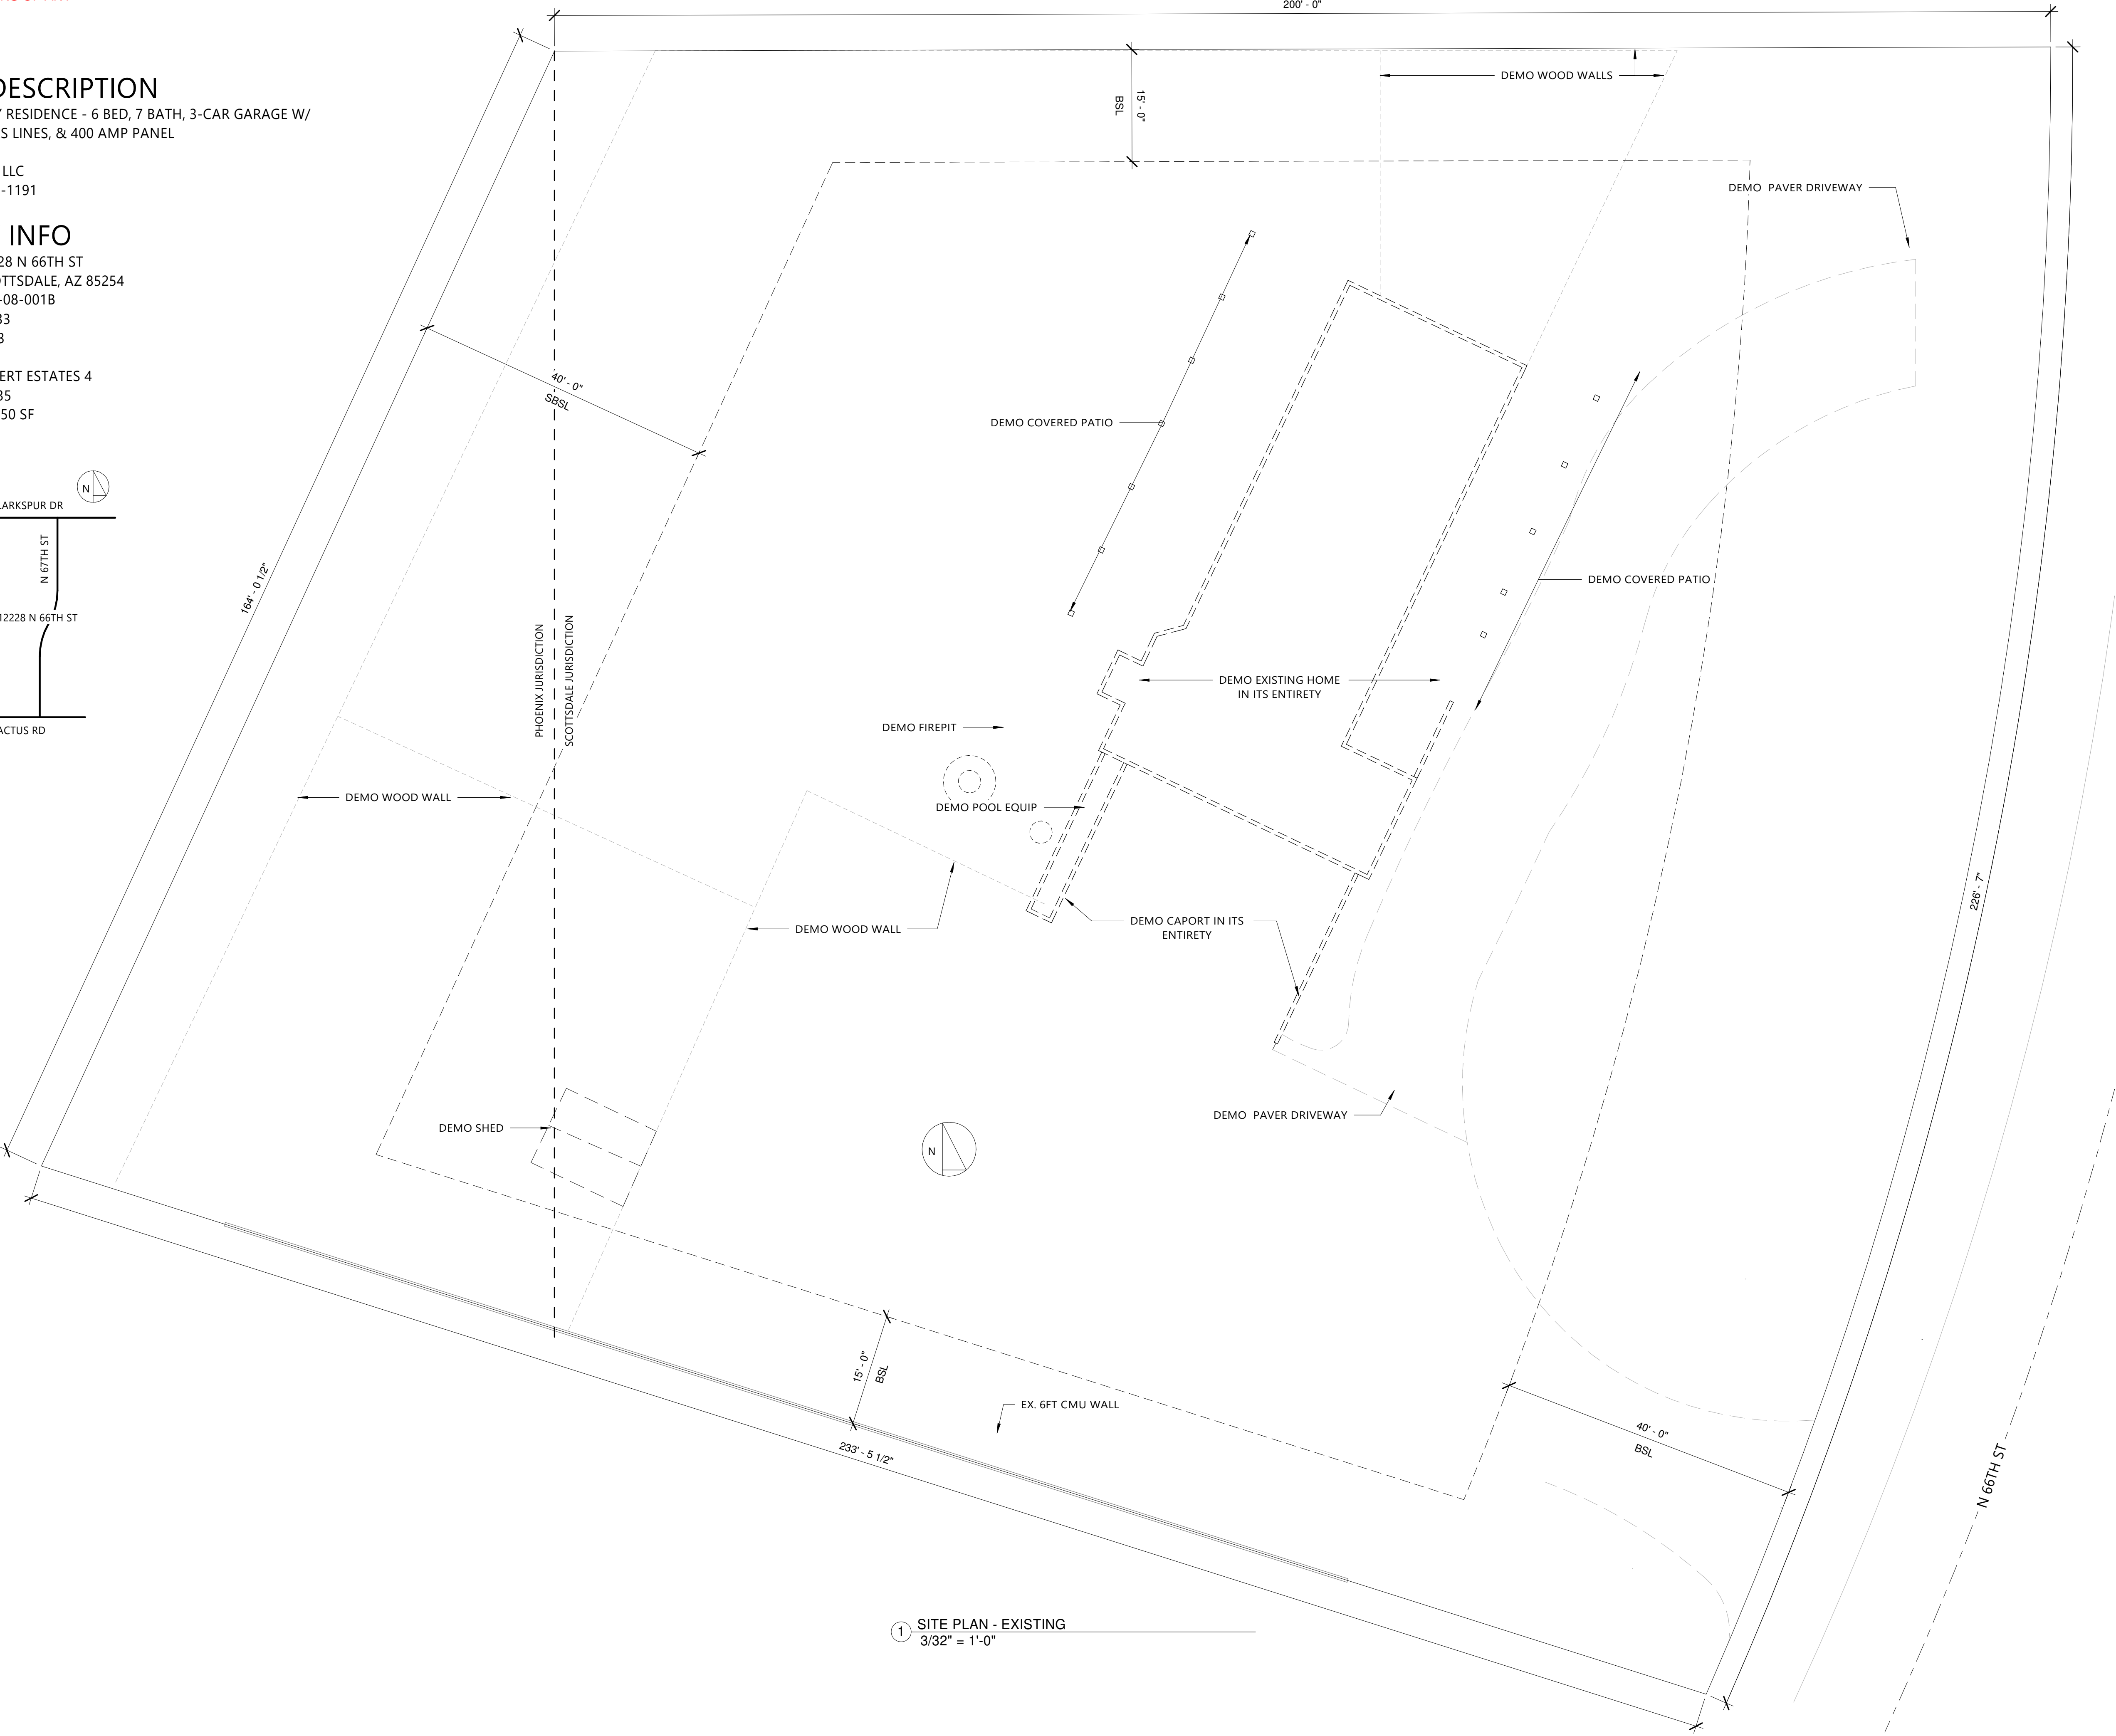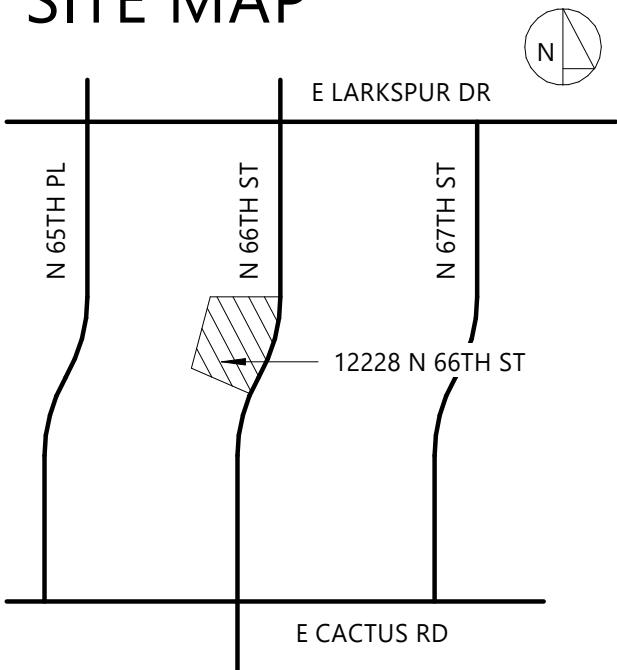

GENERAL NOTES

- 1 DO NOT SCALE DRAWINGS
- 2 EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- 3 PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- 4 AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- 5 ONE KOTE STUCCO VENEER - ESR-1471
- 6 GAF BUILT-UP FLAT ROOF - ESR-4676
- 7 SPRAY FOAM INSULATION - CCRR-1011

BUILDING CODES

2021 INTERNATIONAL BUILDING CODE  
2021 INTERNATIONAL RESIDENTIAL CODE  
2021 INTERNATIONAL FIRE CODE  
2020 NATIONAL ELECTRICAL CODE

SPRAY FOAM IN WALLS & ROOF

SWD SPRAY FOAM INSULATION (SEE GN #8)  
TO BE APPLIED TO UNDER SIDE OF ROOF. NO  
ROOF VENTS REQUIRED - UNVENTED ATTIC  
PER R806.5

PER "TABLE 2" OF CCRR 1011: USING  
ASSEMBLY NO. 1 - WALLS TO HAVE 5.5" OF 106  
OPEN CELL FOAM APPLIED TO INTERIOR WALL  
SHEATHING CEILING TO HAVE 10" OF 106  
OPEN CELL FOAM APPLIED TO UNDERSIDE OF  
ROOF PER INCLUDED 2021 IECC ENGERY COST  
COMPLIANCE SHEET

SWENKA RESIDENCE  
12228 N 66TH ST

DEMO SITE PLAN

Project number 04003  
Date 08/31/2017  
Drawn by ETT  
Checked by ETT

A101

Scale As indicated

1 SITE PLAN - EXISTING  
3/32" = 1'-0"



PROJECT DESCRIPTION

NEW SINGLE FAMILY RESIDENCE - 6 BED, 7 BATH, 3-CAR GARAGE W/  
COVERED PATIO, GAS LINES, & 400 AMP PANEL

OWNERS: RS AHCS LLC  
PHONE: (303) 807-1191

PROPERTY INFO


ADDRESS: 12228 N 66TH ST  
SCOTTSDALE, AZ 85254  
APN: 175-08-001B  
Q-S #: 92-33  
MCR #: 9233  
LOT #: 1  
SUB-DIV: DESERT ESTATES 4  
ZONING: R1-35  
LOT SIZE: 31,350 SF

PROPOSED SF

HOME: 6,108 SF  
PATIO: 826 SF  
GARAGE: 910 SF  
TOTAL: 7,944 SF

LOT COVERAGE: 25.4%  
MAX COVERAGE: 35%

SITE MAP

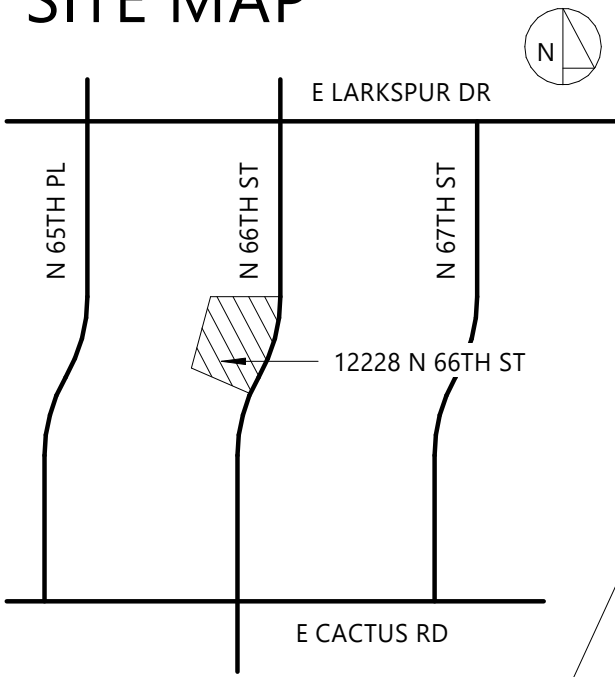

| COMMUNITY NUMBER                                                                                                                                                                                                                                                           | COMMUNITY MAP NUMBER | PANEL # PANEL DATE | SUFFIX | DATE OF FIRM (INDEX DATE) | FIRM ZONE | BASE FLOOD ELEVATION (IN AO ZONE USE DEPTH) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------|--------|---------------------------|-----------|---------------------------------------------|
| 045012                                                                                                                                                                                                                                                                     | 04013C               | 1706               | L      | 10/16/2013                | X         | N/A                                         |
| THE LOWEST FLOOR ELEVATION(S) AND/OR FLOOD PROOFING ELEVATION(S) ON THIS PLAN ARE SUFFICIENTLY HIGH TO PROVIDE PROTECTION FROM FLOODING CAUSED BY A 100-YEAR STORM, AND ARE IN ACCORDANCE WITH SCOTTSDALE REVISED CODE, CHAPTER 37 - FLOODPLAIN AND STORMWATER REGULATION. |                      |                    |        |                           |           |                                             |

1 SITE PLAN - NEW  
3/32" = 1'-0"

etoddDesign, Inc  
www.etodd.com

GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

SWENKA RESIDENCE  
12228 N 66TH ST

NEW SITE PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

A102

Scale As indicated




GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

DOOR & WINDOW SCHEDULE

- 48" X 96" EXT. PIVOT DOOR W/ TMPRD GLASS
- 36" X 96" EXT. SINGLE DOOR W/ TMPRD GLASS
- 32" X 96" EXT. SINGLE DOOR W/ TMPRD GLASS
- 36" X 84" INT. SINGLE SWING DOOR
- 32" X 84" INT. SINGLE SWING DOOR
- 30" X 84" INT. SINGLE SWING DOOR
- 32" X 84" INT. SINGLE POCKET DOOR
- 72" X 84" INT. DOUBLE SWING DOOR
- 60" X 84" INT. DOUBLE SWING DOOR
- 60" X 84" INT. DOUBLE SLIDING DOOR
- 48" X 84" INT. DOUBLE SLIDING DOOR
- 16' X 96" EXT. MULTI-PANEL SLIDING DOOR
- 16' X 8' ROLL-UP GARAGE DOOR
- 10' X 8' ROLL-UP GARAGE DOOR

- A 96" X 66" SLIDING DOUBLE PANE LOW-E  
EGRESS WINDOW @ 30" A.F.F.  
B 36" X 66" SINGLE HUNG @ 30" A.F.F.  
C 24" X 84" SINGLE FIXED @ 12" A.F.F.  
D 84" X 18" SINGLD FIXED @ 66" A.F.F.

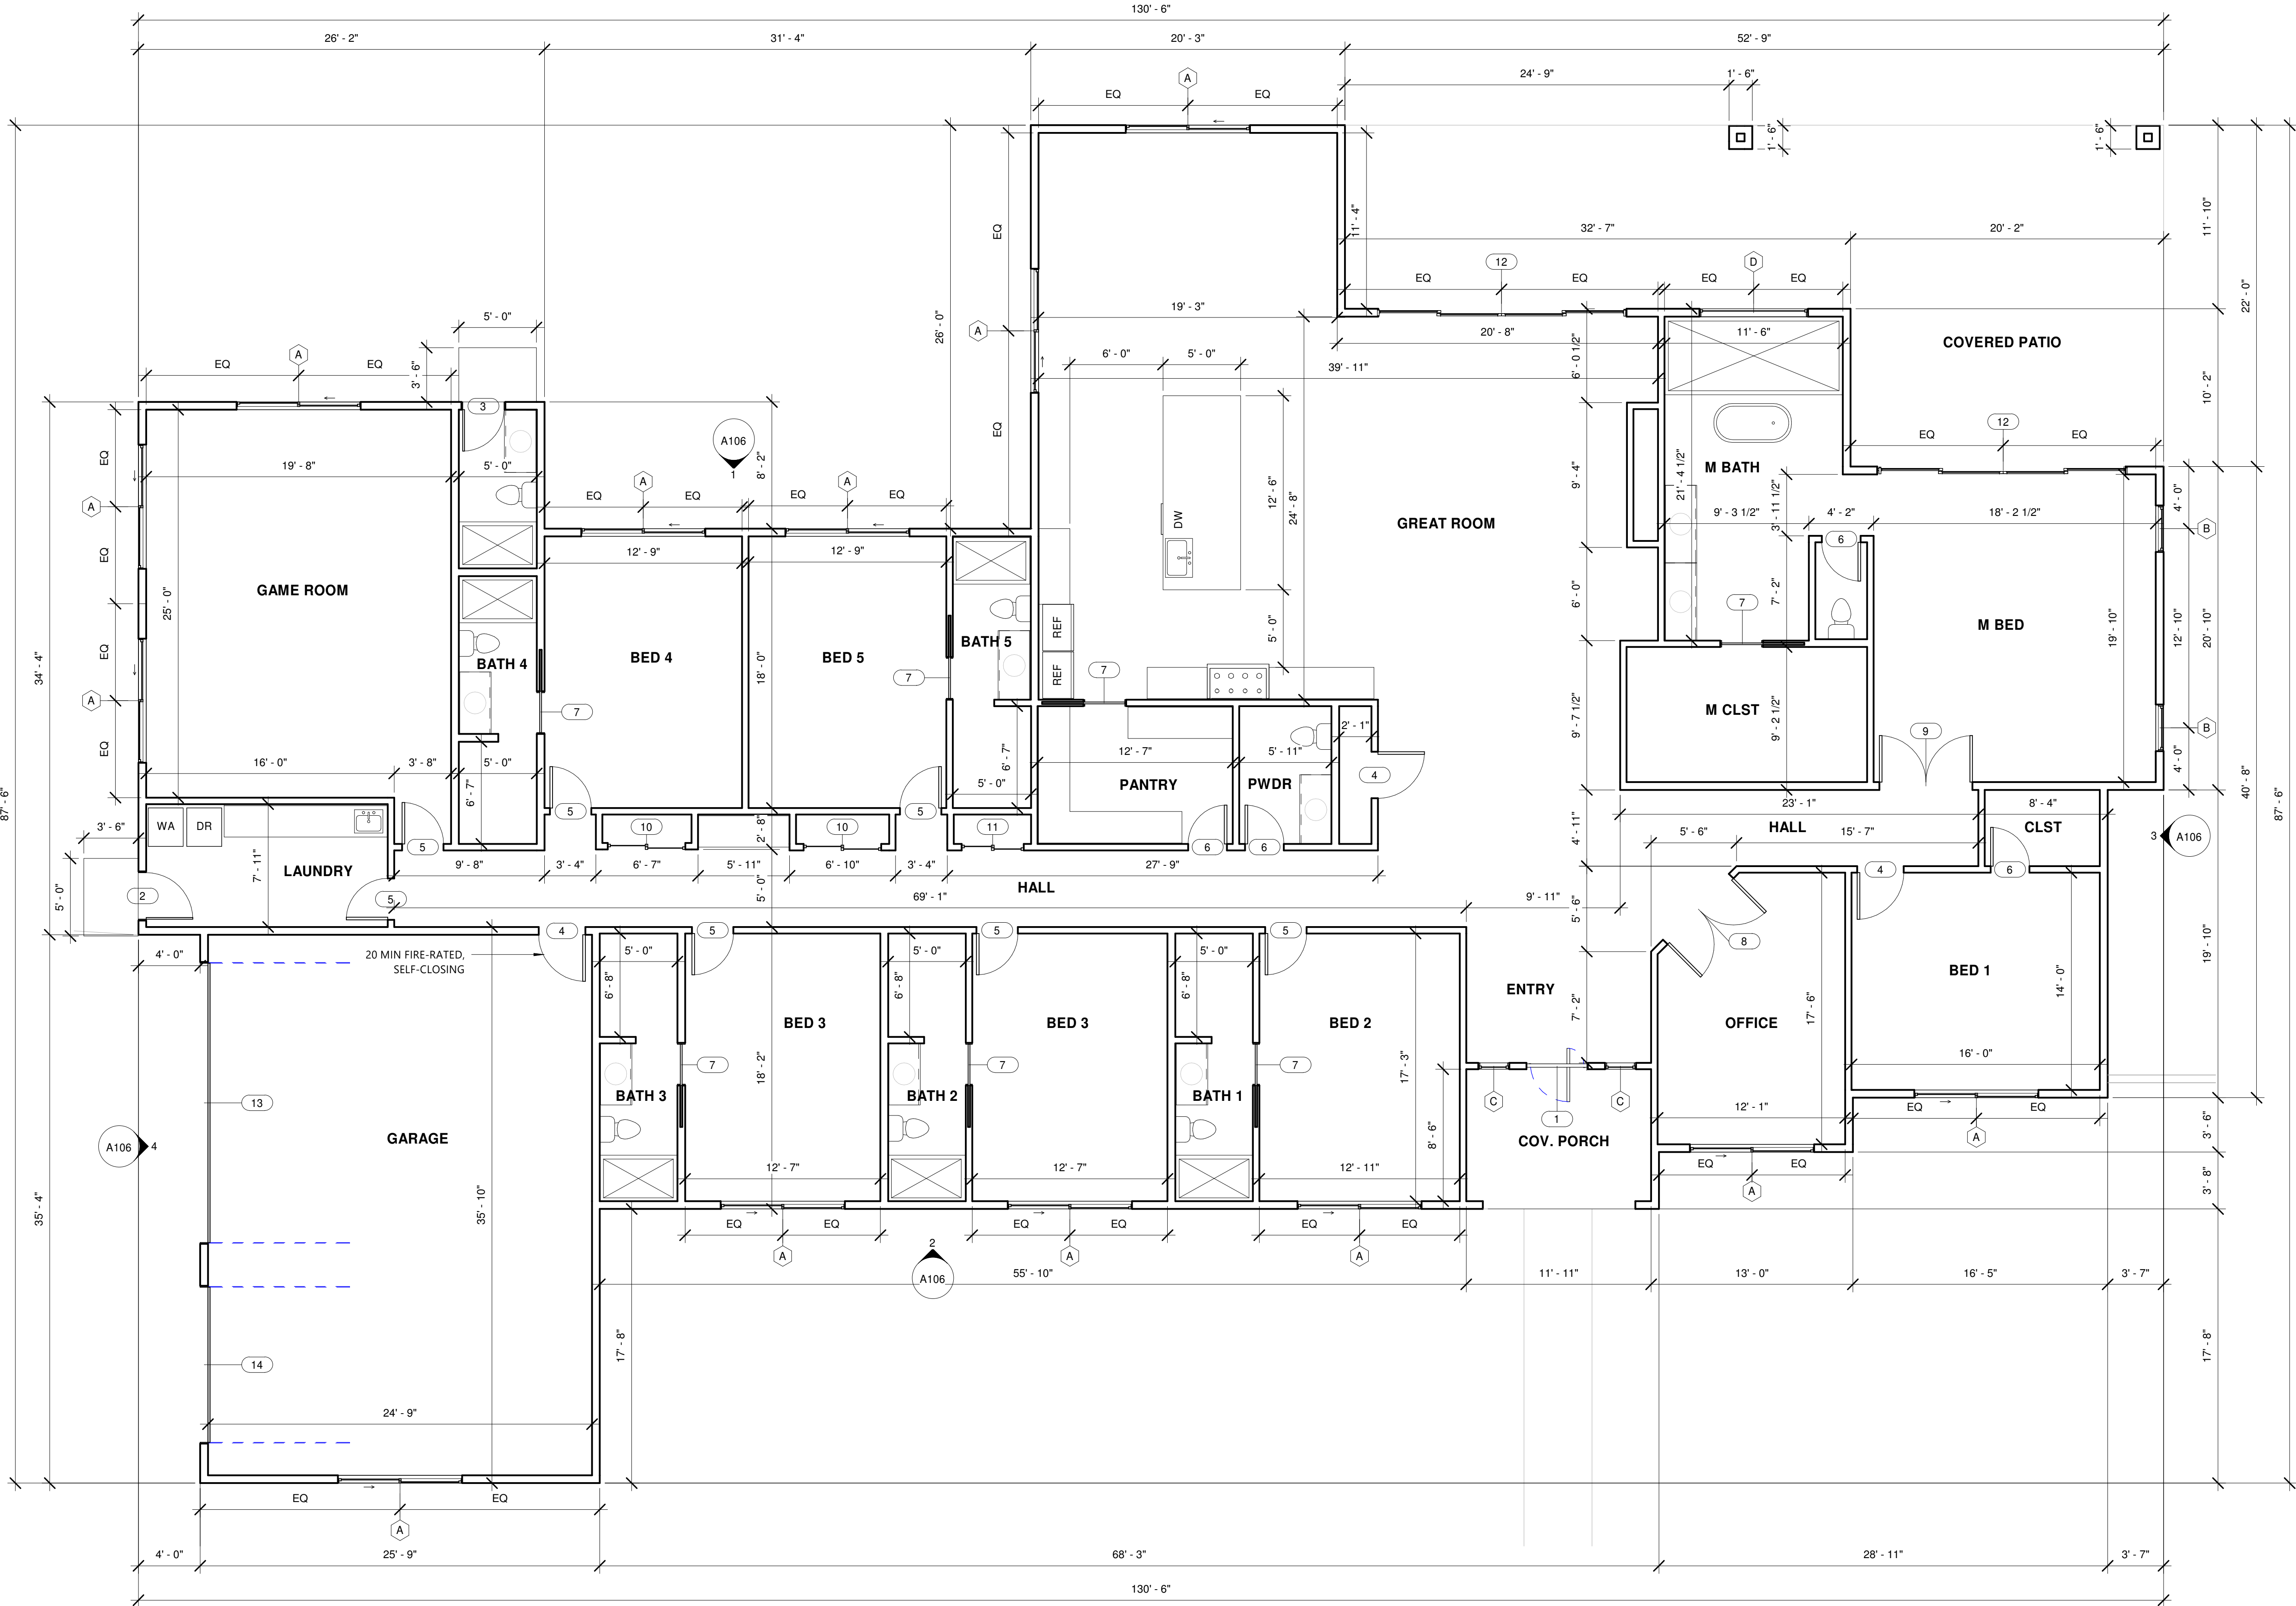

1 FLOORPLAN  
3/16" = 1'-0"

SWENKA RESIDENCE  
12228 N 66TH ST

FLOORPLAN

Project number 04003  
Date 08/31/2017  
Author  
Drawn by  
Checked by Checker


A103

Scale As indicated



## GENERAL NOTES

- 1 DO NOT SCALE DRAWINGS  
2 EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
3 INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.  
4 UNLESS NOTED OTHERWISE (U.N.O.)  
5 PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
6 BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
7 (2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.  
8 AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
9 UNDERSIDE OF ROOF DECK. EXTEND  
10 SHEATHING OVER TRUSS FACE AS REQUIRED.  
11 ONE KOTE STUCCO VENEER - ESR-1471  
12 GAF BUILT-UP FLAT ROOF - ESR-4676  
13 SPRAY FOAM INSULATION - CCR-1011

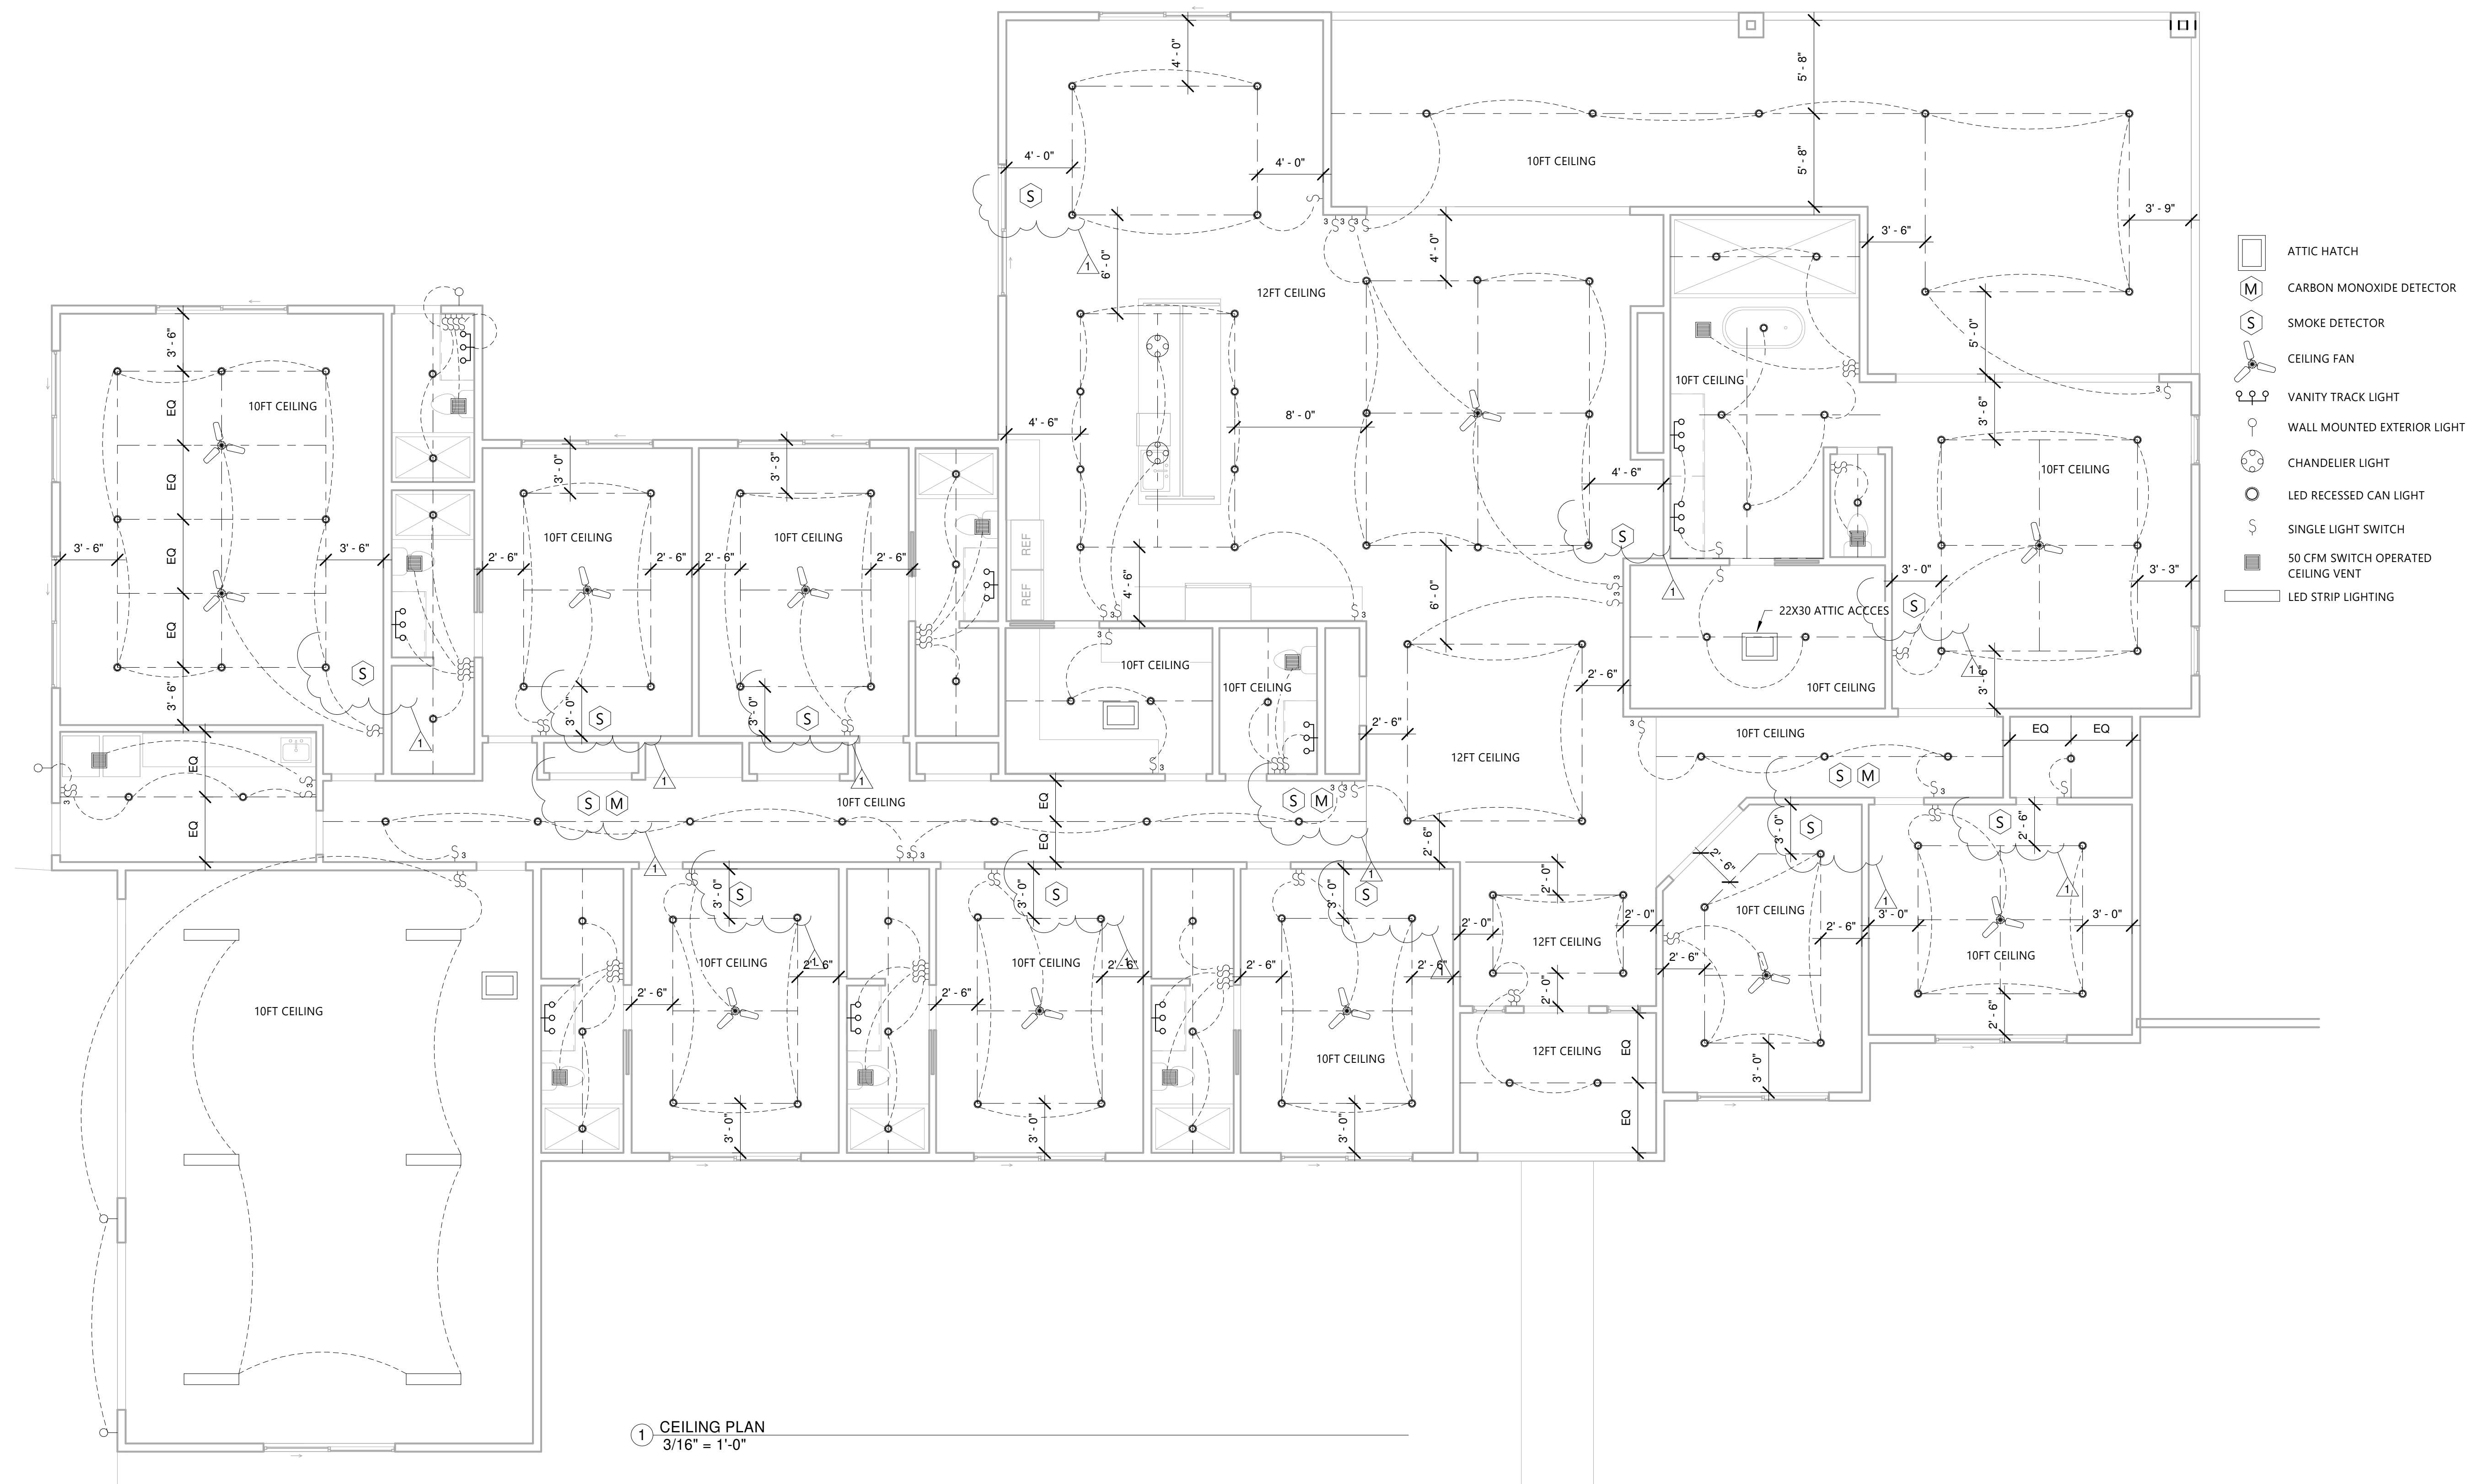

① CEILING PLAN  
3/16" = 1'-0"

SWENKA RESIDENCE  
12228 N 66TH ST

## CEILING PLAN

|                |            |
|----------------|------------|
| Project number | 04003      |
| Date           | 08/31/2017 |
| Drawn by       | Author     |
| Checked by     | Checker    |

# A104

Scale As indicated




GENERAL NOTES

- 1 DO NOT SCALE DRAWINGS
- 2 EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- 3 PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- 4 AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- 5 ONE KOTE STUCCO VENEER - ESR-1471
- 6 GAF BUILT-UP FLAT ROOF - ESR-4676
- 7 SPRAY FOAM INSULATION - CCRR-1011

ROOFING NOTE

COOL/LIGHT REFLECTIVE COATED ROOFS. ROOF  
SOLAR REFLECTANCE AND THERMAL EMITTANCE  
FOR ROOF SLOPES LESS THAN 2:12. 3-YEAR-AGED  
SOLAR REFLECTANCE INDEX (SRI) OF 64, 3-YEAR-  
AGED SOLOR REFLECTANCE OF 0.55, & A 3-YEAR-  
AGED THERMAL EMITTANCE OF 0.75 OVER  
CONDITIONED AND NON-CONDITIONED SPACES.  
N1102.6 AMENDED

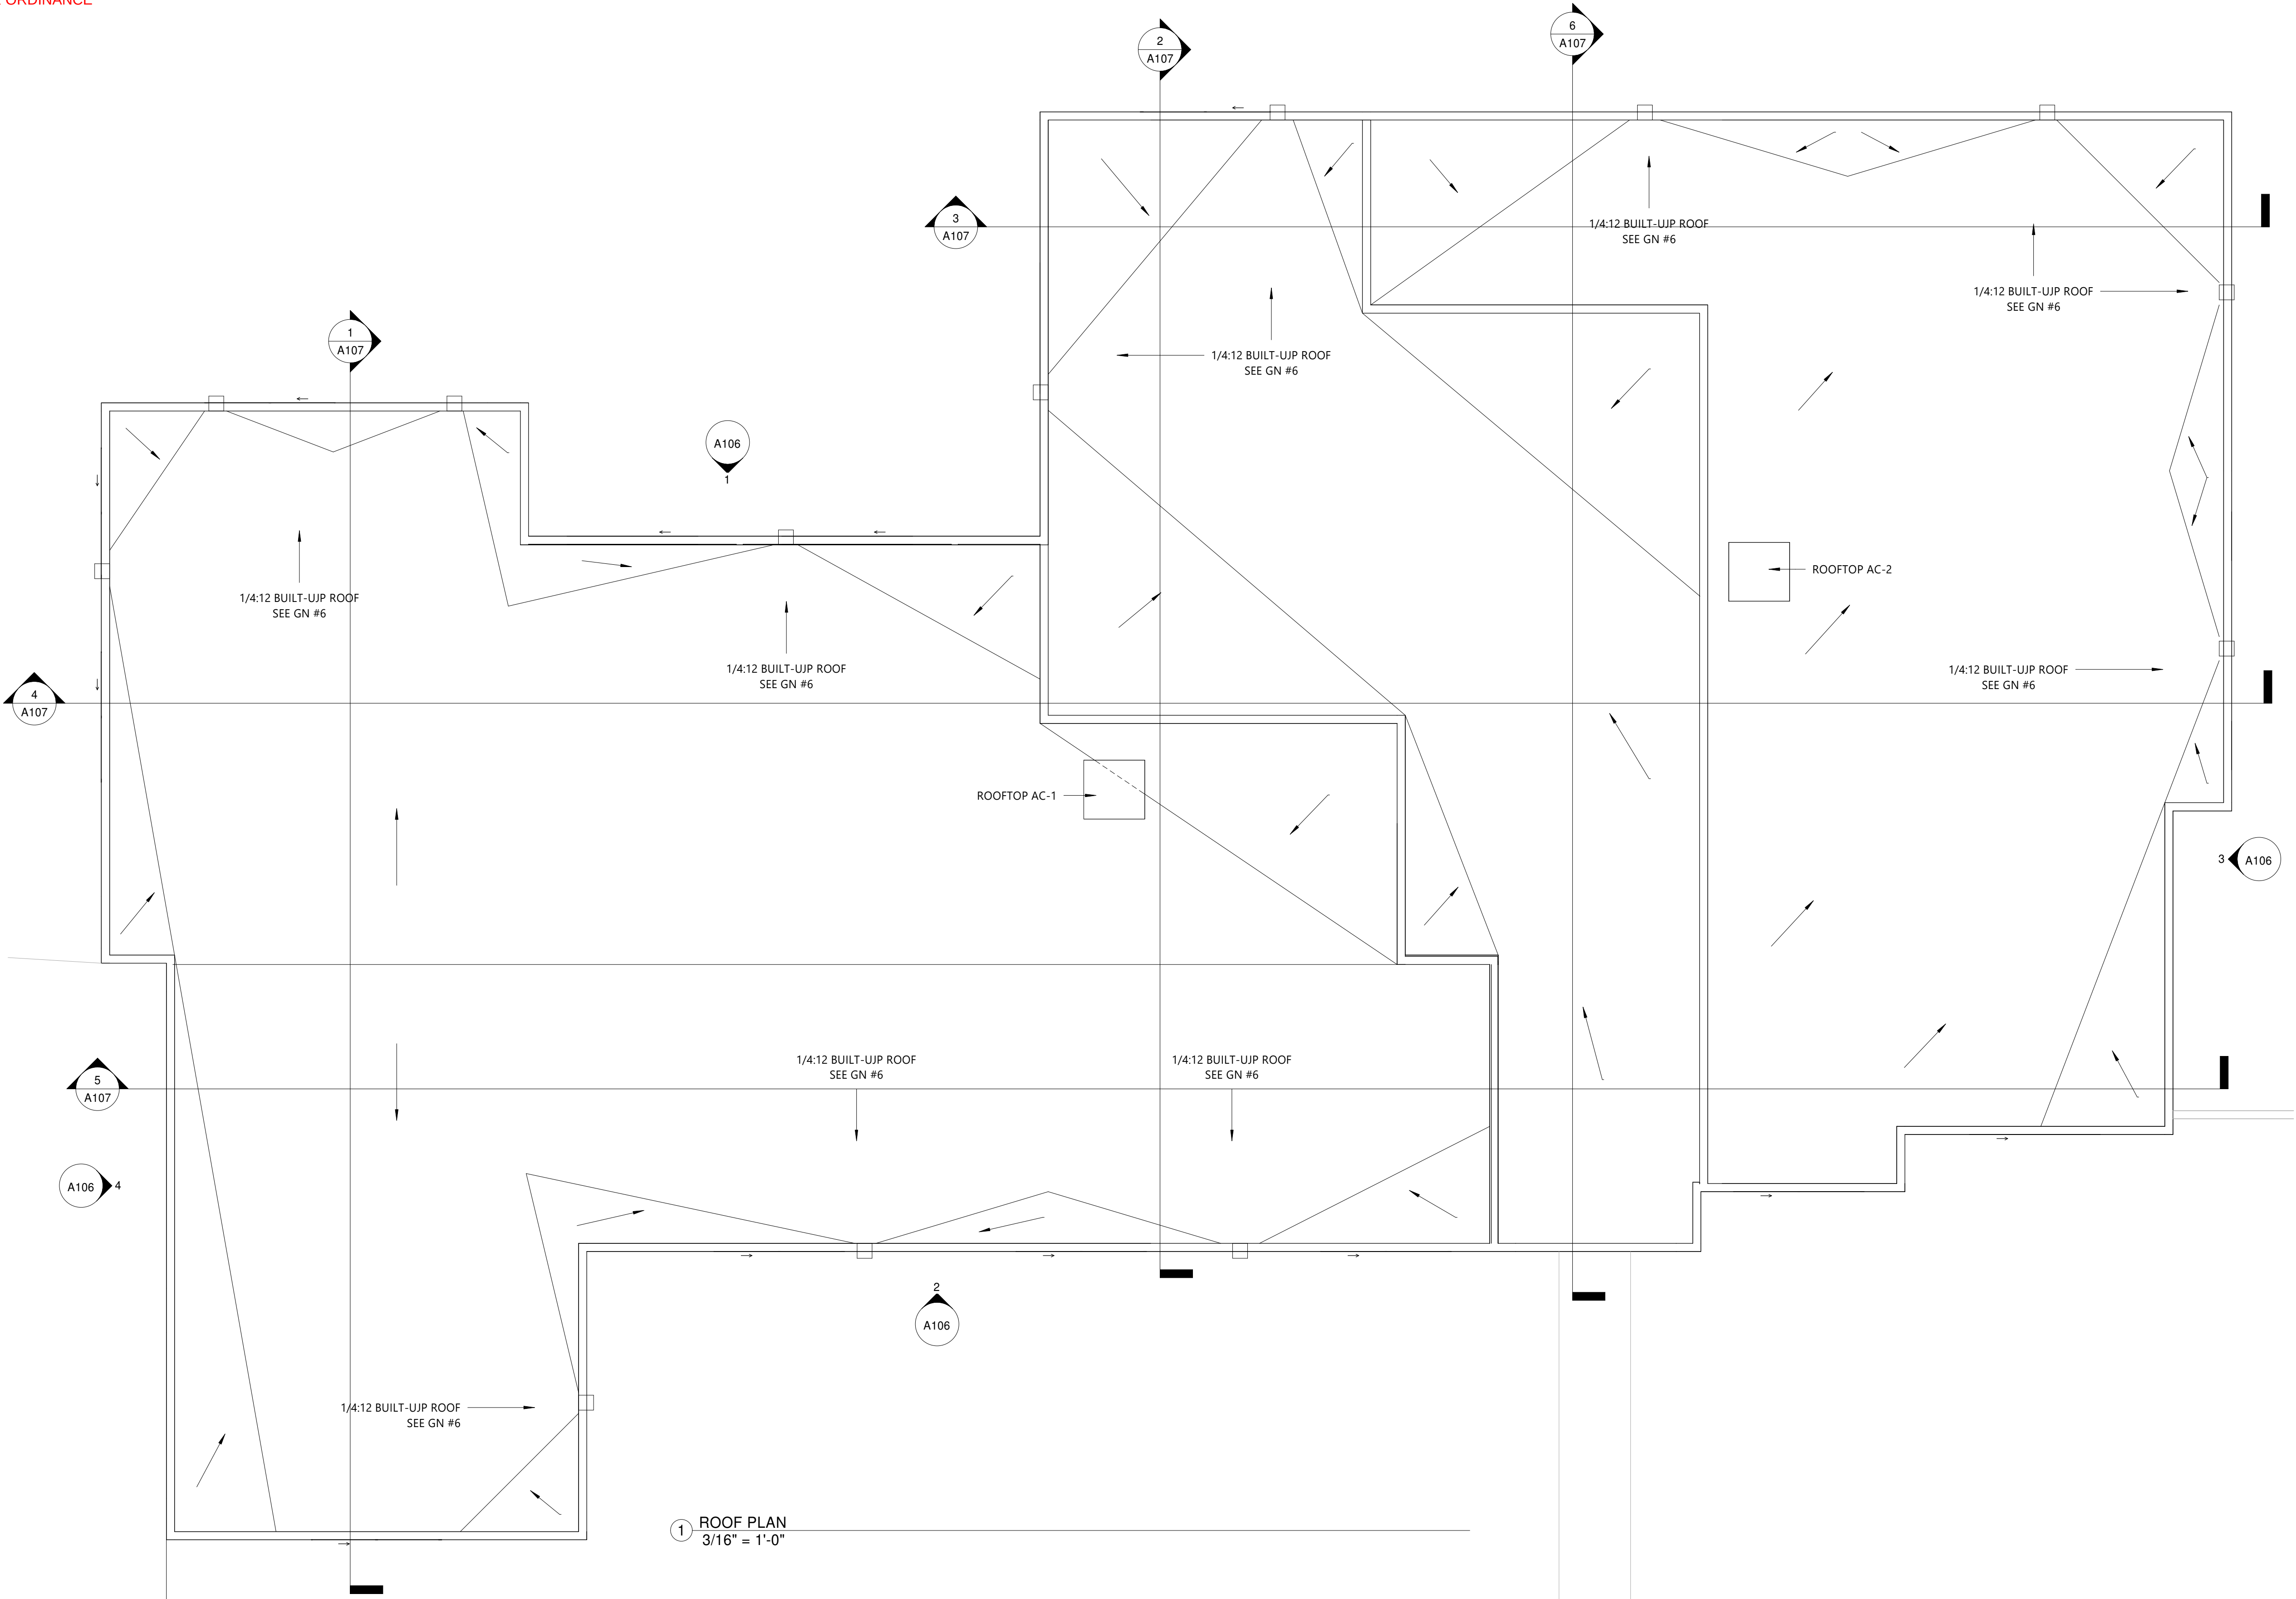

SWENKA RESIDENCE

12228 N 66TH ST


ROOF PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker


A105

Scale As indicated




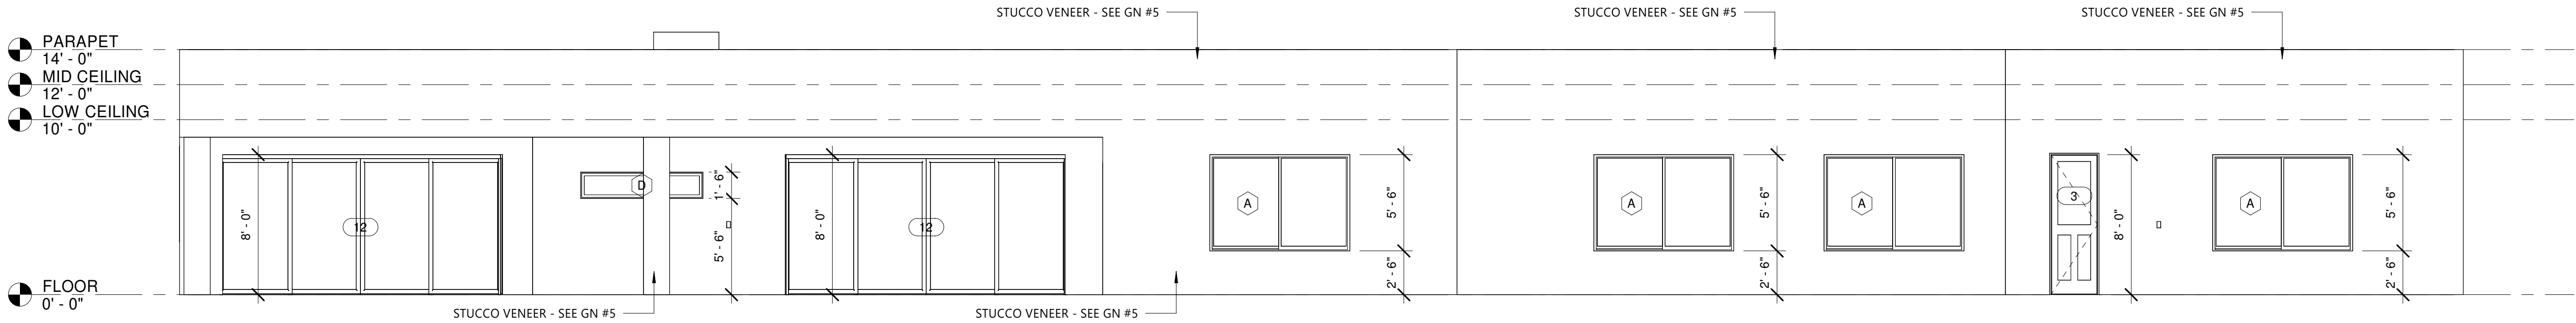


1 ELEVATION - WEST  
3/16" = 1'-0"

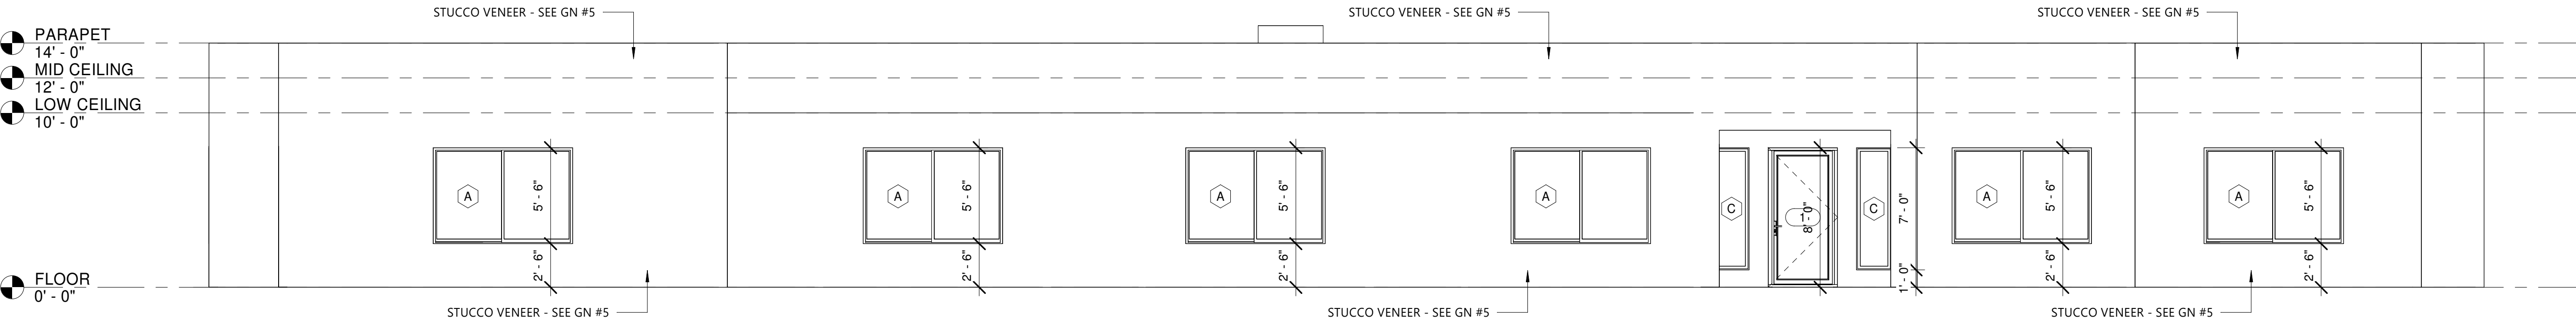

2 ELEVATION - EAST  
3/16" = 1'-0"

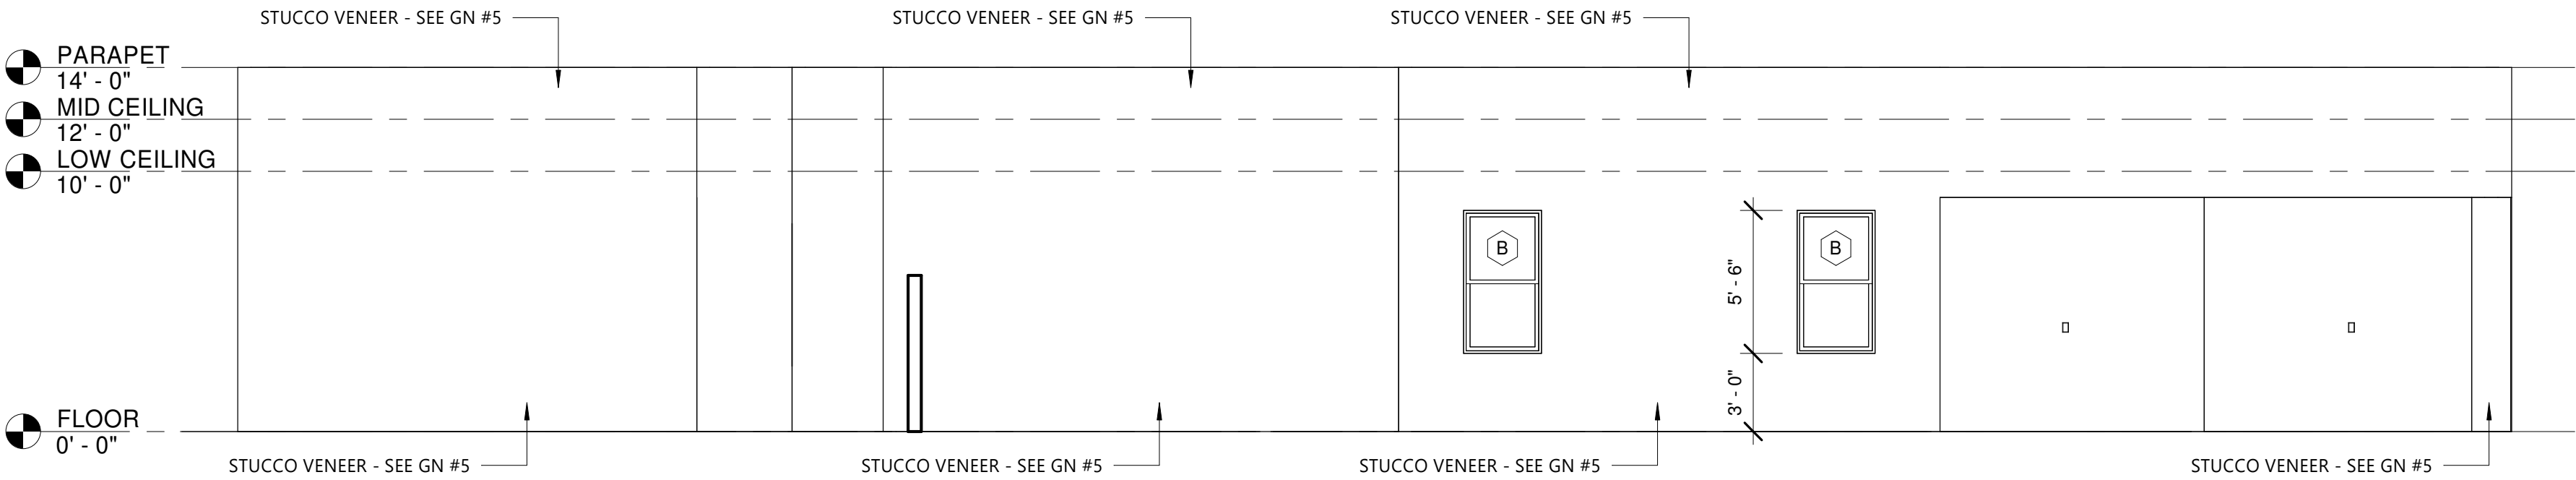

3 ELEVATION - NORTH  
3/16" = 1'-0"

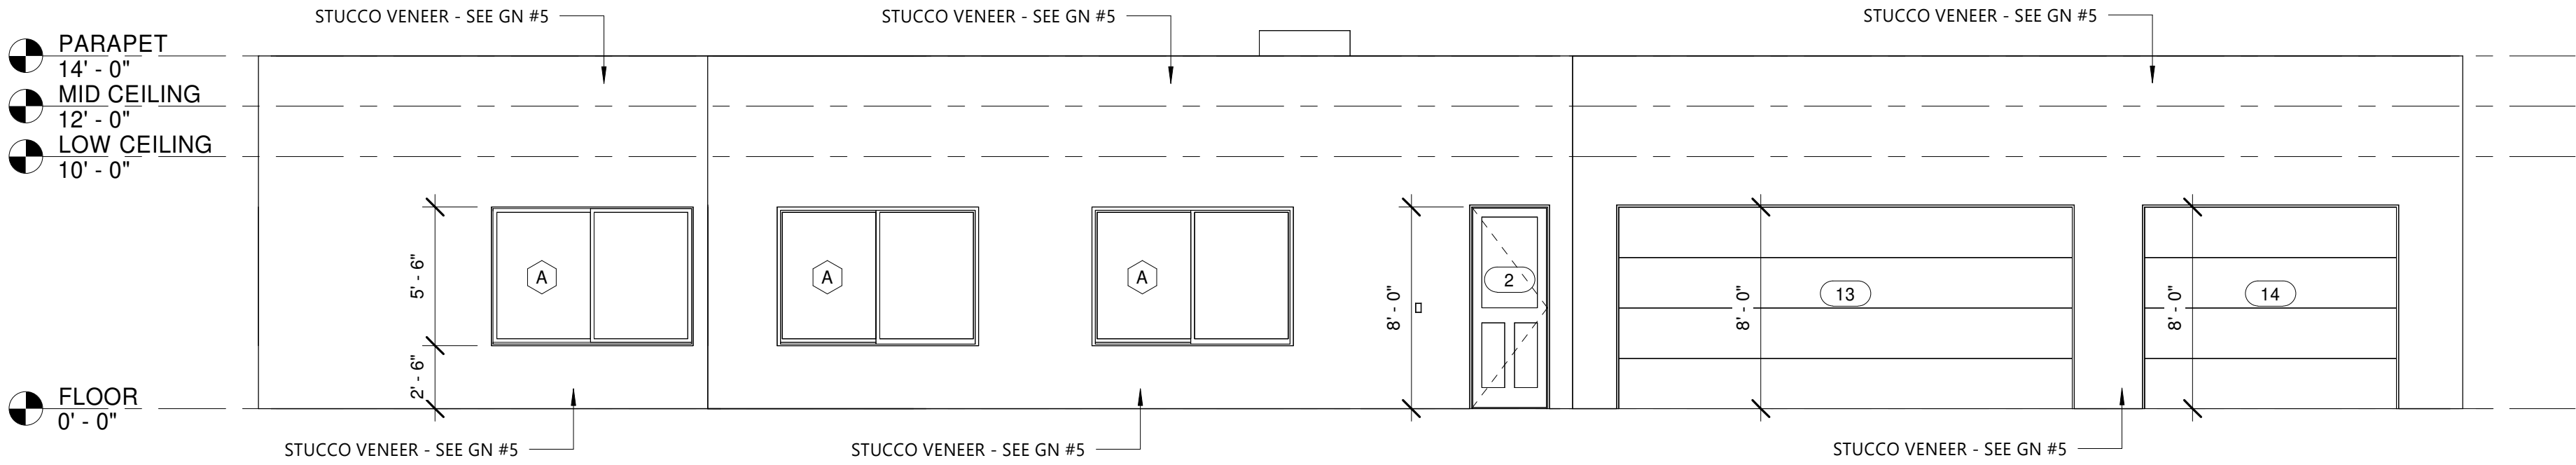

4 ELEVATION - SOUTH  
3/16" = 1'-0"

etoddDesign, Inc  
www.etodd.com

#### GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CRR-1011

#### DOOR & WINDOW SCHEDULE

- 48" X 96" EXT. PIVOT DOOR W/ TMPRD GLASS
- 36" X 96" EXT. SINGLE DOOR W/ TMPRD GLASS
- 32" X 96" EXT. SINGLE DOOR W/ TMPRD GLASS
- 36" X 84" INT. SINGLE SWING DOOR
- 32" X 84" INT. SINGLE SWING DOOR
- 30" X 84" INT. SINGLE SWING DOOR
- 32" X 84" INT. SINGLE POCKET DOOR
- 72" X 84" INT. DOUBLE SWING DOOR
- 60" X 84" INT. DOUBLE SWING DOOR
- 60" X 84" INT. DOUBLE SLIDING DOOR
- 48" X 84" INT. DOUBLE SLIDING DOOR
- 16' X 96" EXT. MULTI-PANEL SLIDING DOOR
- 16' X 8' ROLL-UP GARAGE DOOR
- 10' X 8' ROLL-UP GARAGE DOOR

- A 96" X 66" SLIDING DOUBLE PANE LOW-E  
EGRESS WINDOW @ 30" A.F.F.  
B 36" X 66" SINGLE HUNG @ 30" A.F.F.  
C 24" X 84" SINGLE FIXED @ 12" A.F.F.  
D 84" X 18" SINGLD FIXED @ 66" A.F.F.

SWENKA RESIDENCE  
12228 N 66TH ST

#### ELEVATIONS


Project number 04003  
Date 08/31/2017  
Author  
Checked by Checker

A106


Scale As indicated

ARCHITECTURAL ELEVATIONS  
APPROVED  
BY THE CITY OF SCOTTSDALE PLANNING DEPARTMENT  
4752-25  
PLAN CHECK NO.  
APPROVED BY  
DATE  
02/19/2026  
CONSTRUCTION AND INSTALLATION SHALL BE IN ACCORDANCE WITH  
THIS PLAN AND ANY AND ALL DEVIATIONS WILL REQUIRE REAPPROVAL




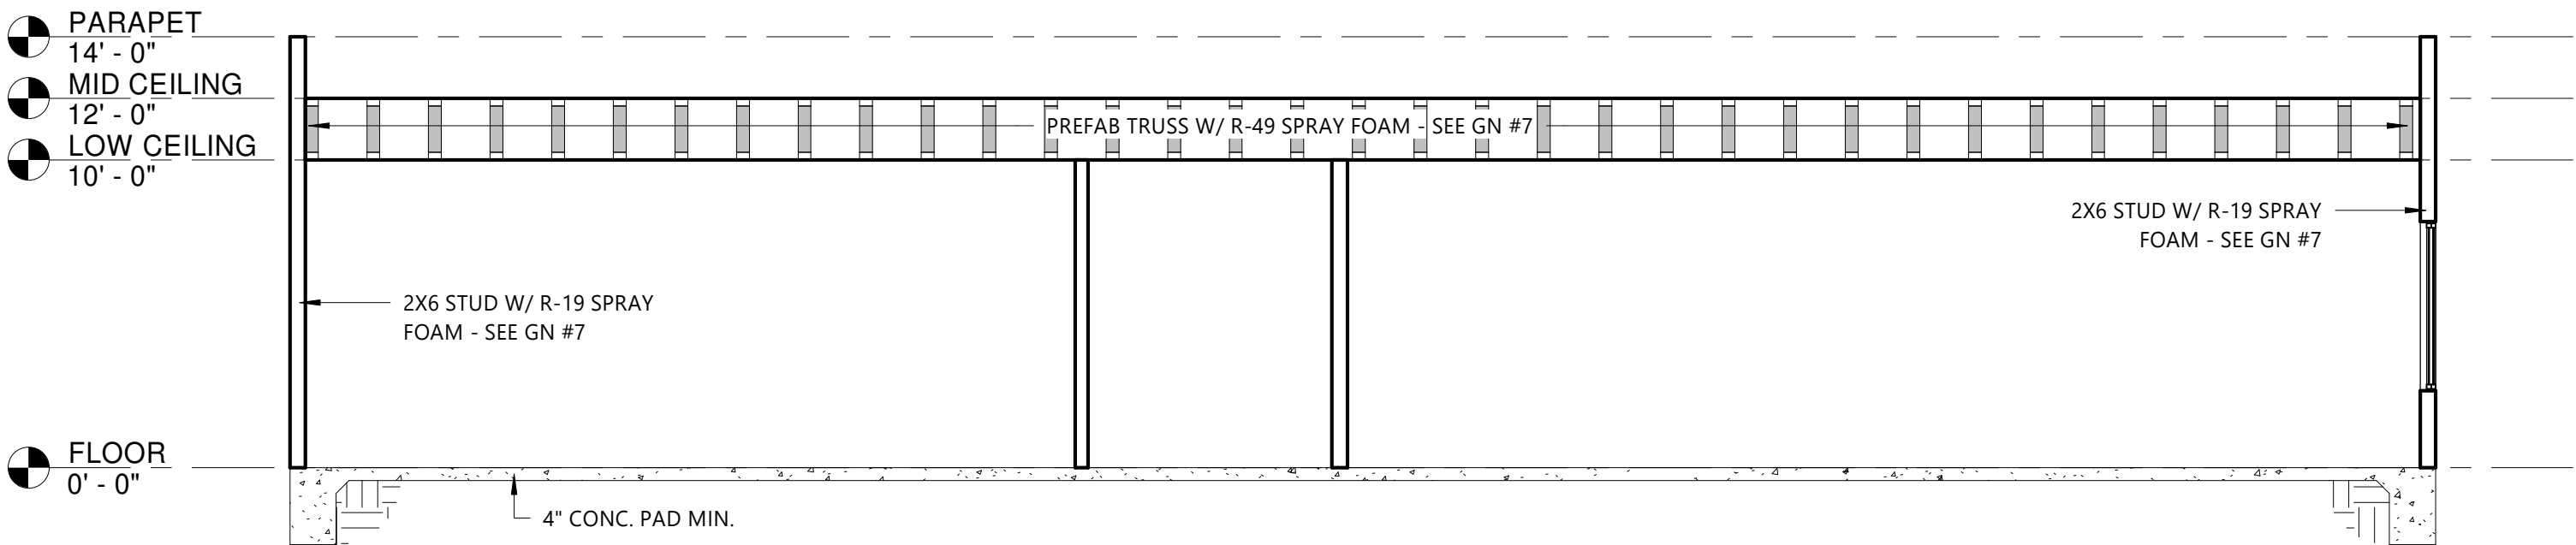


1 GARAGE / TEEN ROOM SECTION  
3/16" = 1'-0"

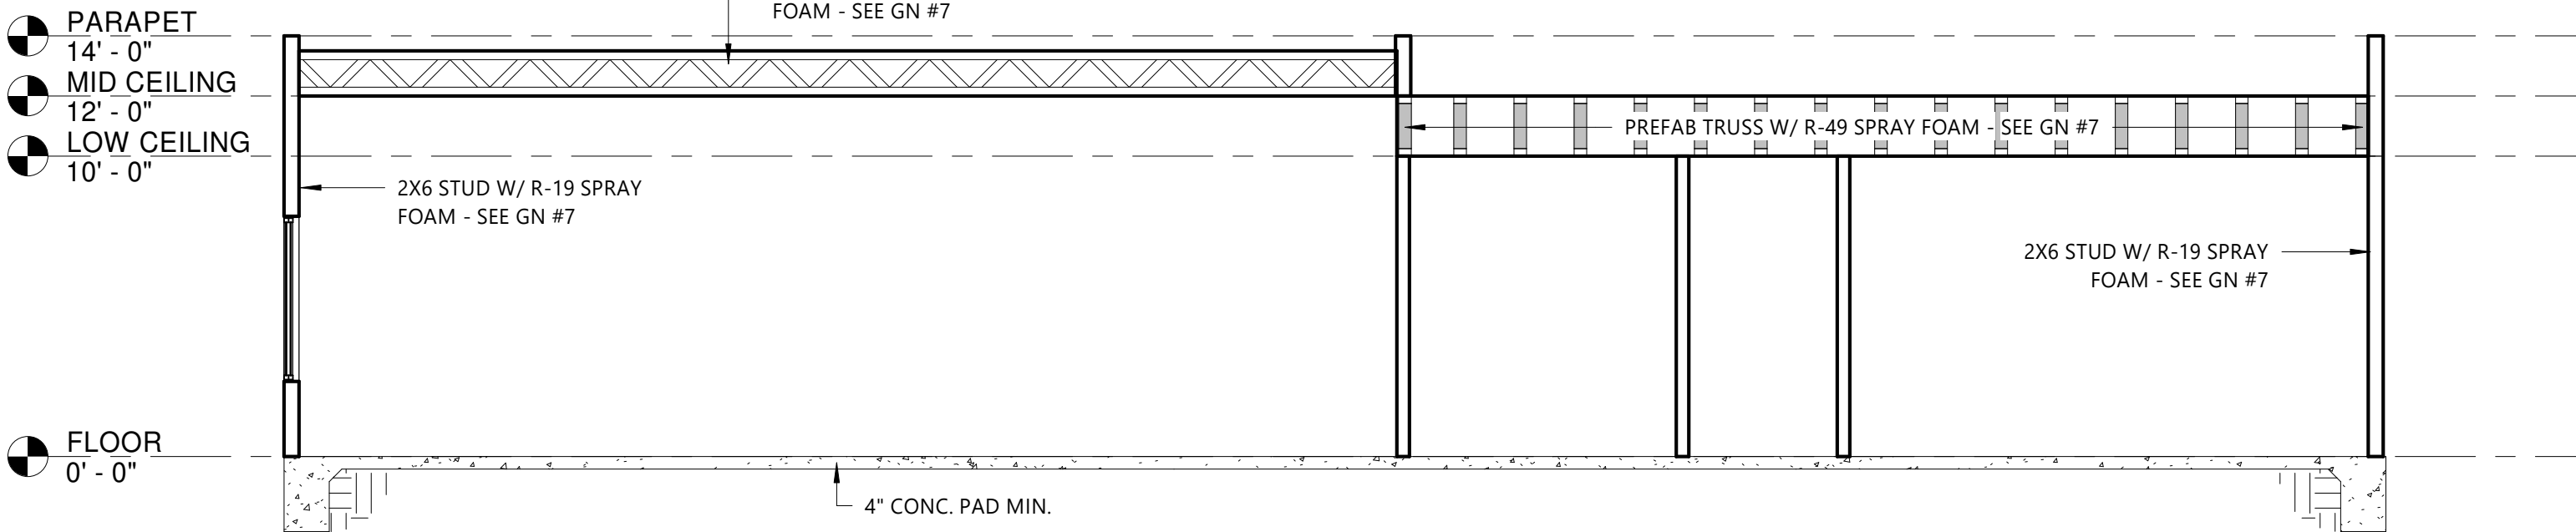


2 KITCHEN / BED 3 SECTION  
3/16" = 1'-0"

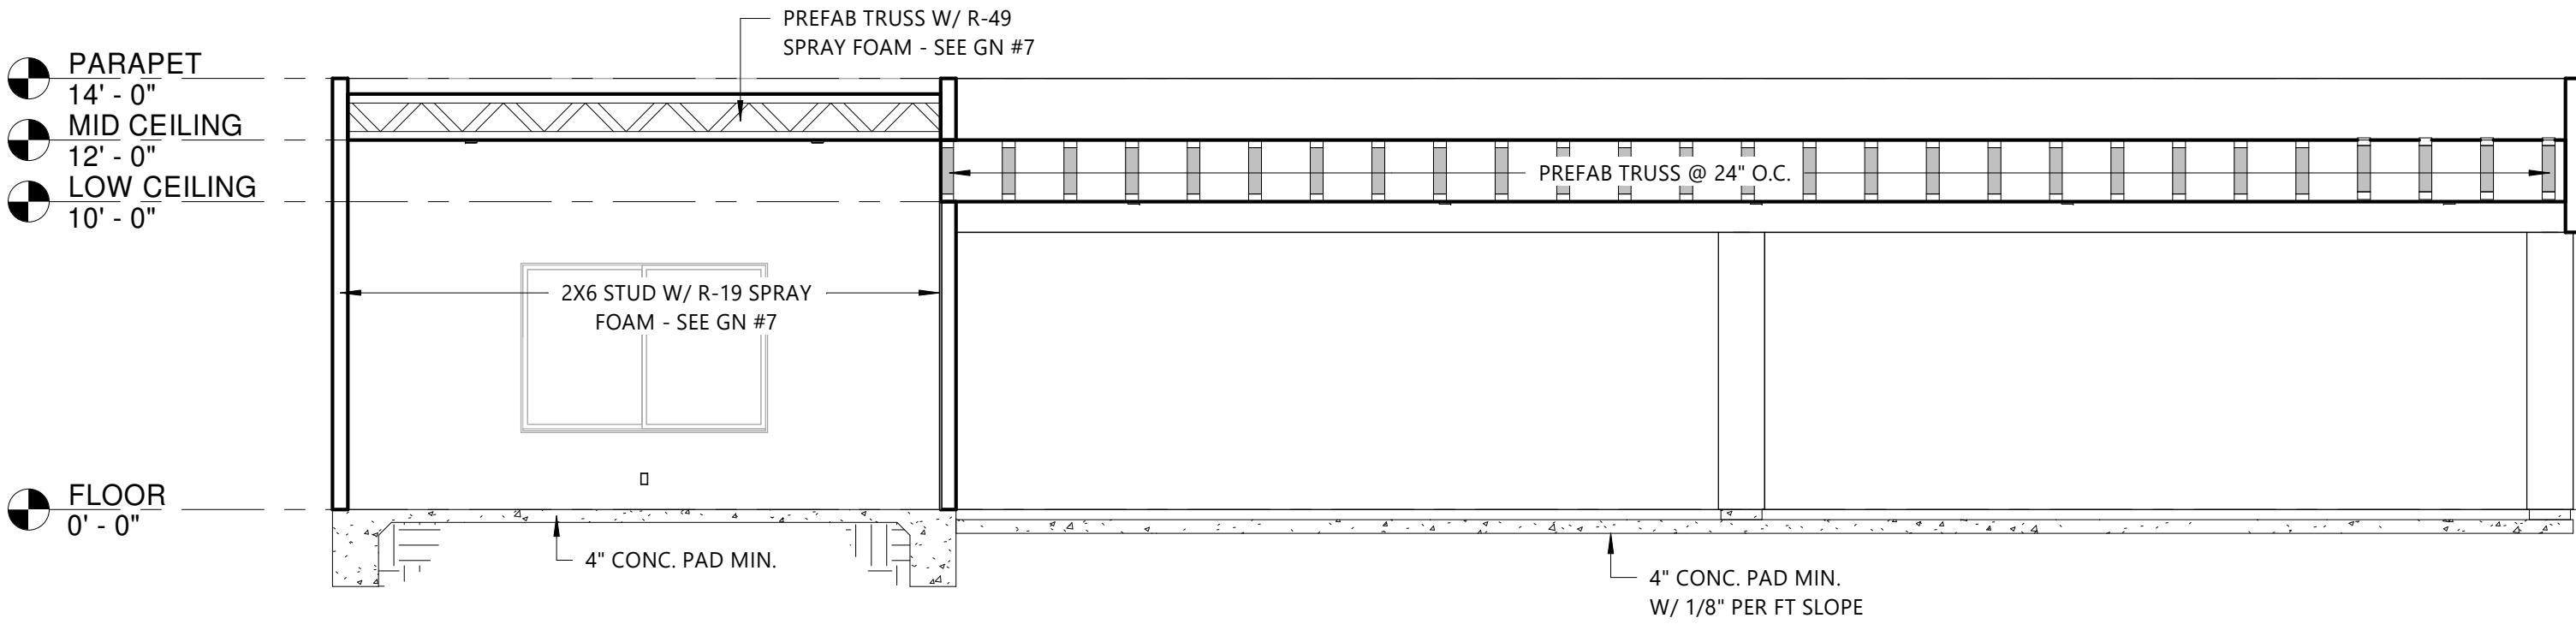


3 PATIO / DINING SECTION  
3/16" = 1'-0"

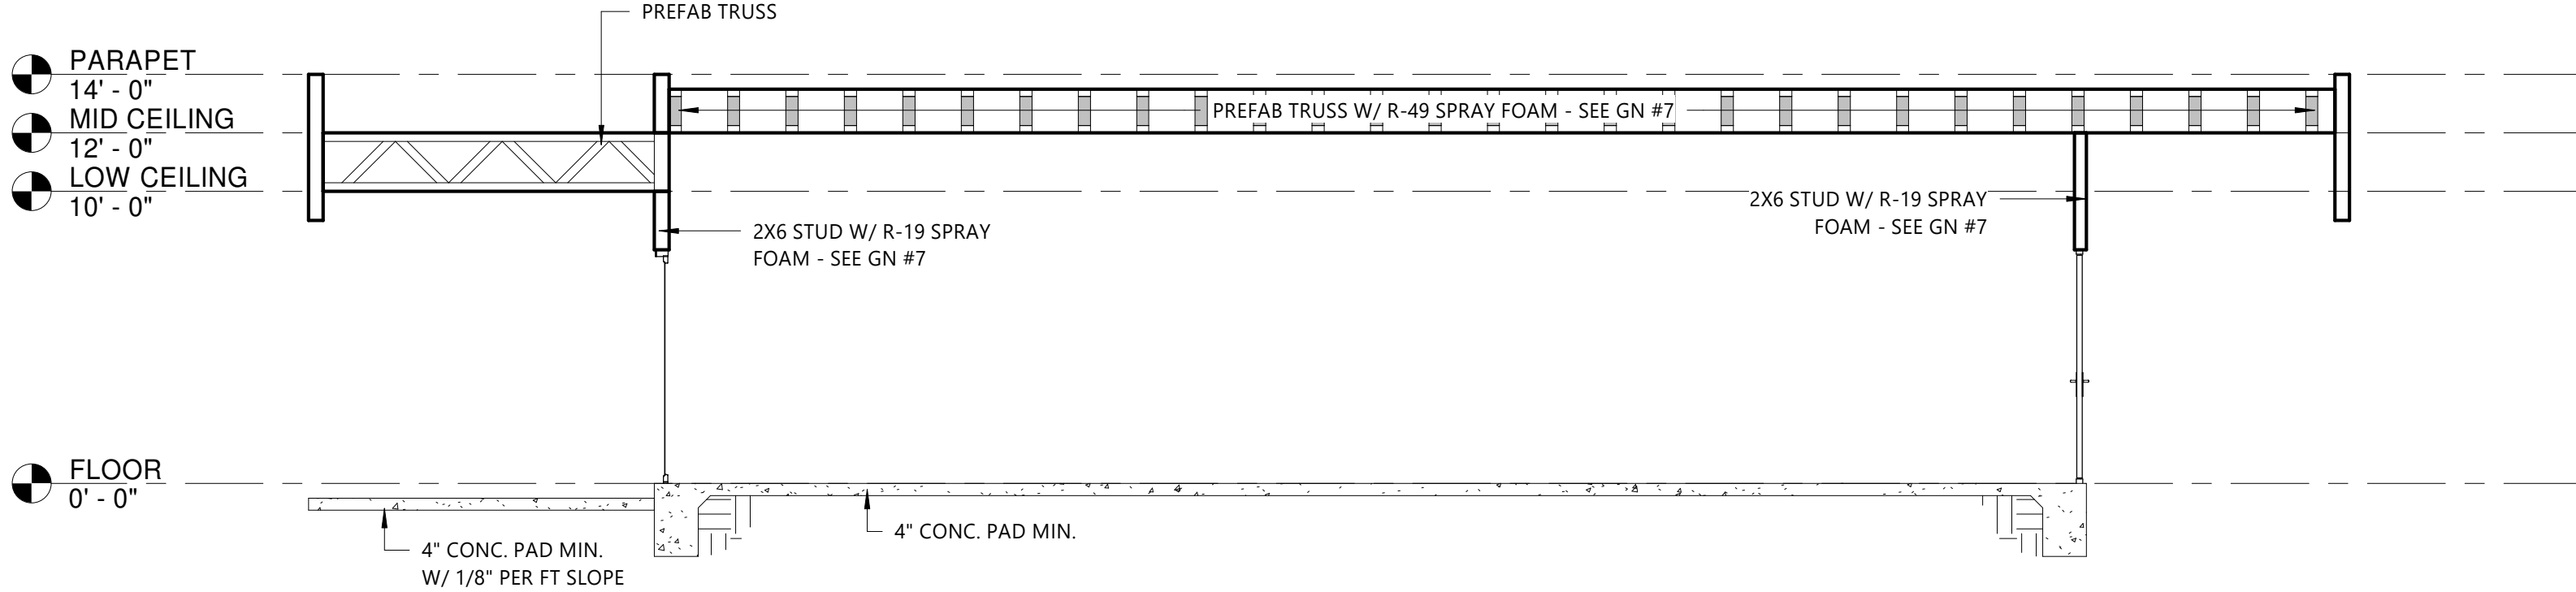

4 CROSS SECTION  
3/16" = 1'-0"

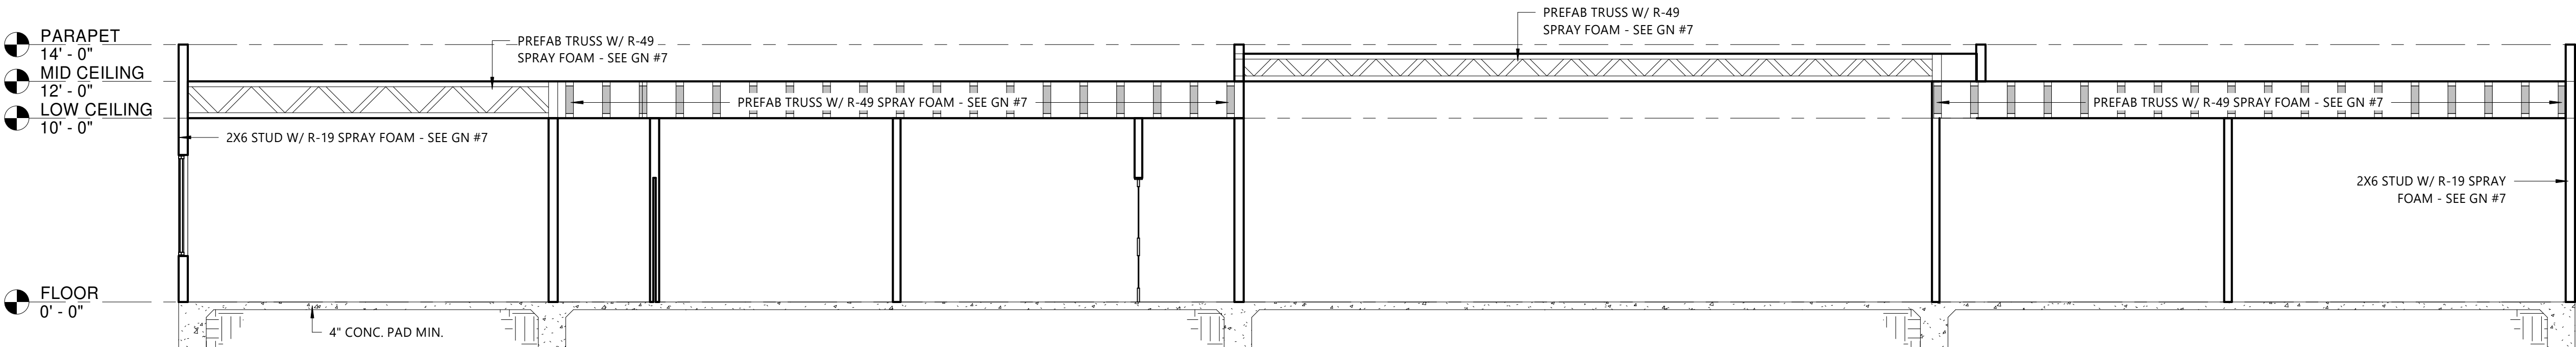

5 BEDROOM SECTION  
3/16" = 1'-0"

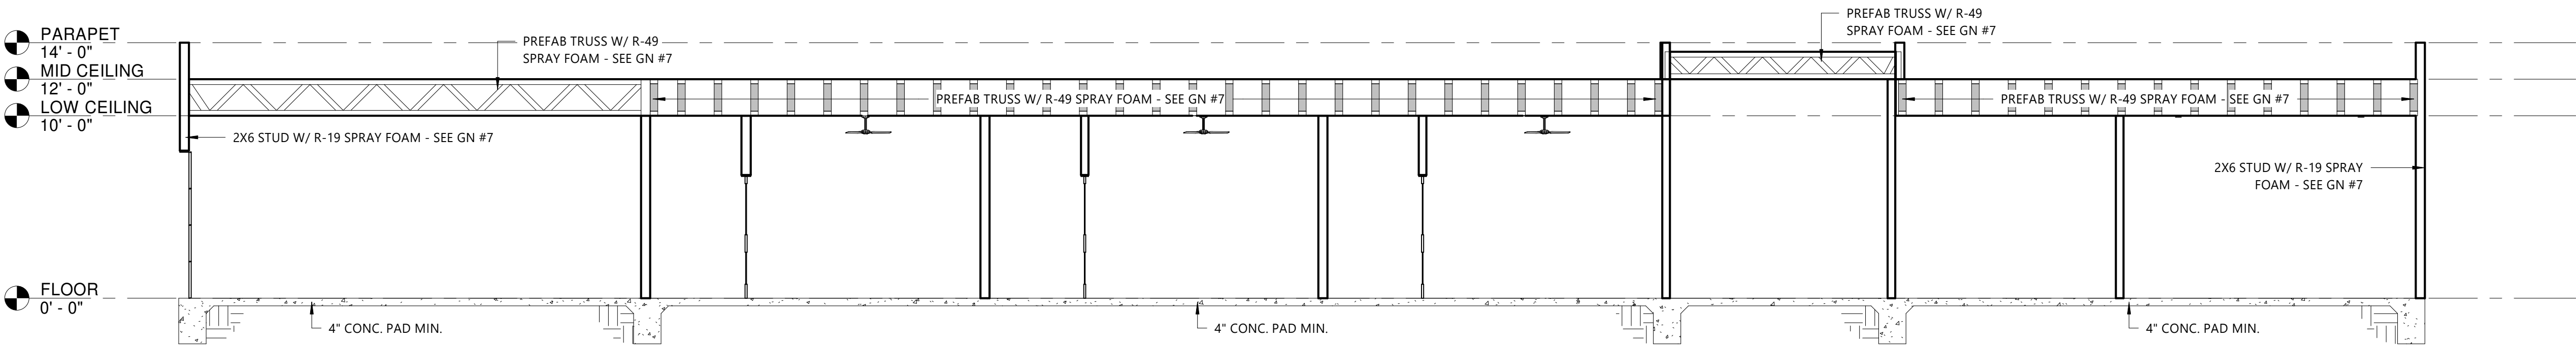

6 ENTRY / LIVING SECTION  
3/16" = 1'-0"

#### GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C., INTERIOR WALLS USE 2X4 STUDS @ 16" O.C., UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER BEAMS/HEADERS SPANNING UP TO 6'-0" AND (2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO UNDERSIDE OF ROOF DECK. EXTEND SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

#### PRESCRIPTIVE ENERGY COMPLY

2021 IRC (T. N1102.1.3)

#### FENESTRATION & GLAZING:

SHGC: 0.25 MAX.  
U-FACTOR: 0.40 MAX.

#### INSULATION:

FRAME WALLS: R-19 (2X6) R-13 (2X4)  
CMU/MASS WALLS: R-6  
ATTIC: R-49

SWENKA RESIDENCE  
12228 N 66TH ST

#### SECTIONS

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker


A107

Scale As indicated



GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

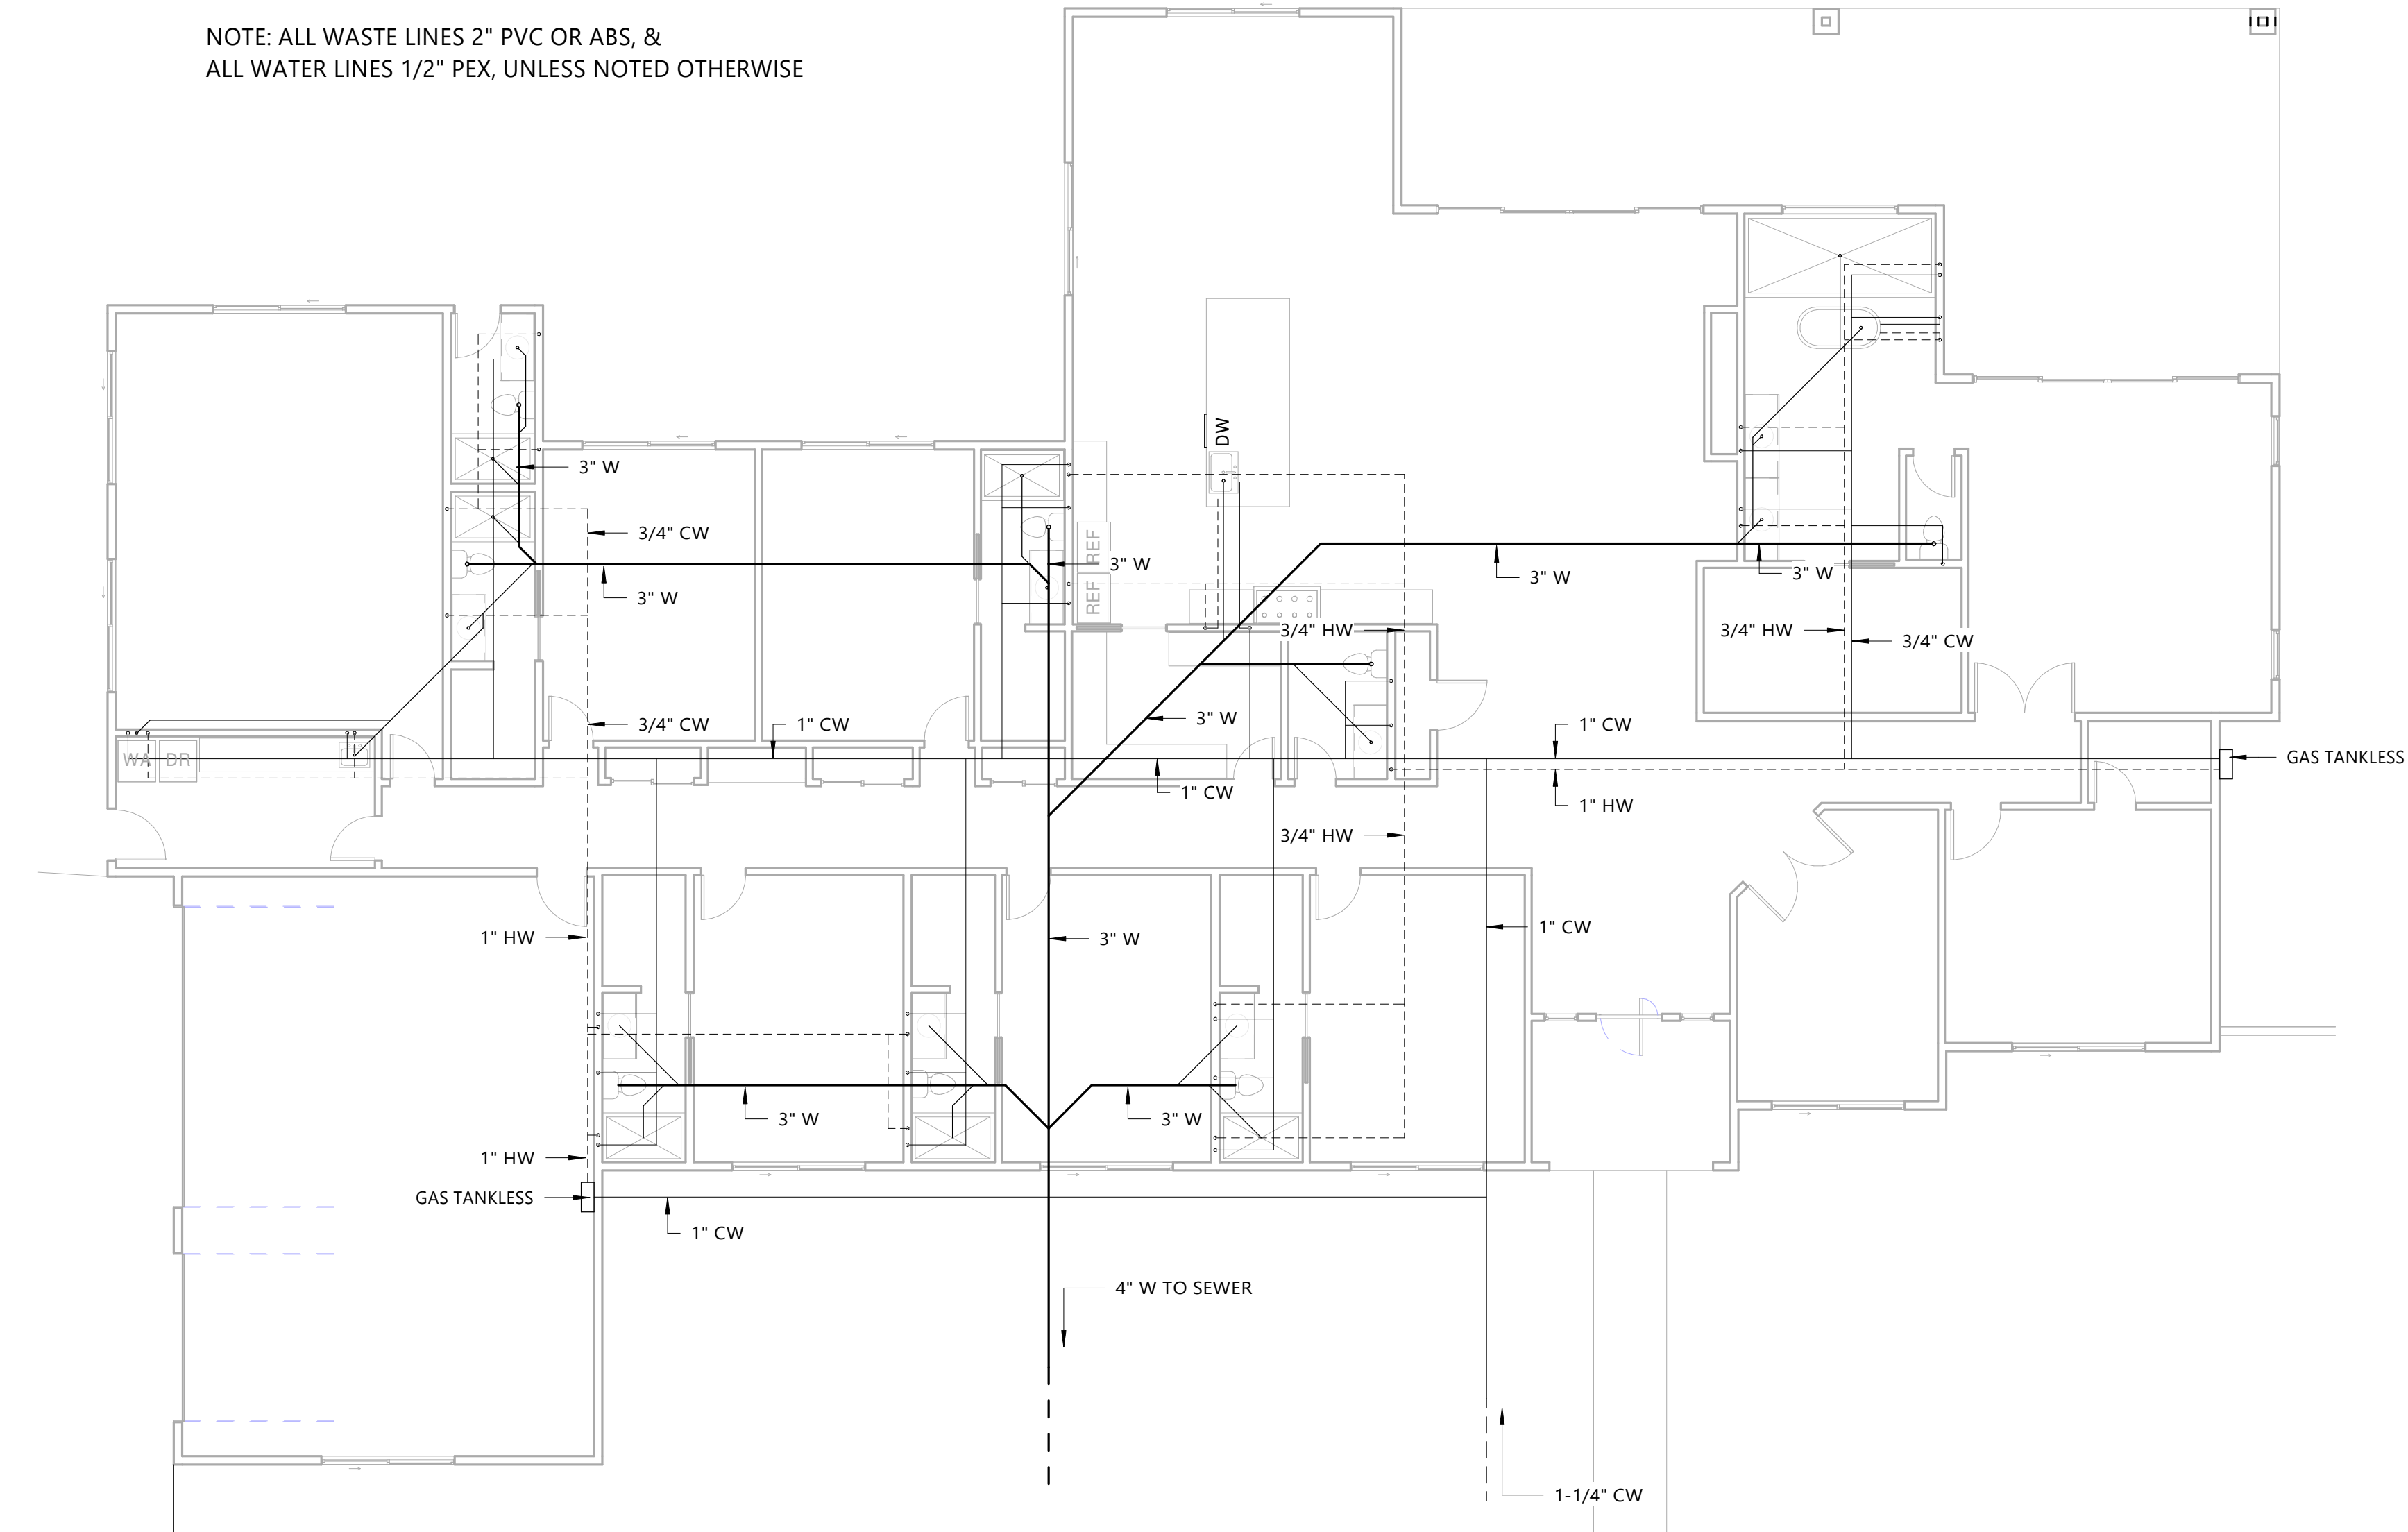

| WATER CALCULATIONS                                                                   |                 |                |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-------------|----------|
| WATER SUPPLY FIXTURE UNITS                                                           |                 |                | TOTALS      |          |
| 1                                                                                    | HALF-BATH GROUP | 2.6 FU         | 2.6         |          |
| 7                                                                                    | FULL BATH GROUP | 3.6 FU         | 25.2        |          |
| 2                                                                                    | LAVATORY        | 0.7 FU         | 1.4         |          |
| 1                                                                                    | BATHTUB         | 1.4 FU         | 1.4         |          |
| 1                                                                                    | KITCHEN GROUP   | 2.5 FU         | 2.5         |          |
| 1                                                                                    | LAUNDRY GROUP   | 2.5 FU         | 2.5         |          |
| 2                                                                                    | HOSE BIBB       | 2.5 FU         | 5.0         |          |
| TOTAL FUXTURE UNITS                                                                  |                 |                | 40.6        |          |
| SYSTEM IS PREDOMINANTLY FLUSH TANK                                                   |                 |                |             |          |
| EQUIVALENT FLOW (GPM)                                                                |                 |                | 26.6        |          |
| WATER PIPE SIZE CALCULATIONS                                                         |                 |                |             |          |
| PIPE LENGTH (TAP TO METER) (FT) =                                                    |                 |                | 50          |          |
| PIPE LENGTH (METER TO LAST FIXTURE) (FT) =                                           |                 |                | 225         |          |
| DISTANCE OF HIGHEST FIXTURE ABOBE POC (FT) =                                         |                 |                | 10          |          |
| TOTAL PIPE LENTH (FT) =                                                              |                 |                | 275         |          |
| FITTING LOSS (25%) (FT) =                                                            |                 |                | 68          |          |
| TOTAL DEVELOPED LENTH (FT) =                                                         |                 |                | 343         |          |
| PRESSURE AVAILABLE FROM WATER DEPT. (PSI) =                                          |                 |                | 60          |          |
| DESIGN PRESSURE (PSI) =                                                              |                 |                | 55          |          |
| PRESSURE REQUIRED AT FIXTURE (PSI) =                                                 |                 |                | 20          |          |
| LOSS THRU 1" METER (PSI) =                                                           |                 |                | 5           |          |
| LOSS DUE TO ELEVATION (5' AT 0.43 PSI/FT) (PSI) =                                    |                 |                | -4.3        |          |
| PRESSURE AVAILABLE FOR PIPING (PSI) =                                                |                 |                | 25          |          |
| PRESSURE AVAILABLE AT DEVELOPED LENGTH (PSI) =                                       |                 |                | 7.3         |          |
| SIZES BASED ON SMOOTH COPPER TYPE 'L' PIPING WITH C = 130                            |                 |                |             |          |
| PIPE SIZE                                                                            | GPM             | FIXTURE UNITS  |             | VELOCITY |
|                                                                                      |                 | FLUSH TANK     | FLUSH VALVE |          |
| 1/2"                                                                                 | 2.6             | 1              | -           | 3.6      |
| 3/4"                                                                                 | 6.8             | 4              | -           | 4.5      |
| 1"                                                                                   | 13.8            | 10             | -           | 5.4      |
| 1-1/4"                                                                               | 23.9            | 32             | -           | 6.1      |
| 1-1/2"                                                                               | 37.8            | 80             | -           | 6.8      |
| NOTE: VELOCITIES LIMITED TO 8.0 FT/SEC                                               |                 |                |             |          |
| WATER PRESSURE PER :                                                                 |                 | FIELD VERIFY   |             |          |
| LOCATION:                                                                            |                 | SCOTTSDALE, AZ |             |          |
| DATE:                                                                                |                 | JULY 2025      |             |          |
| WATER PIPING SYSTEM DESIGNED IN ACCORDANCE WITH THE 2021 INTERNATIONAL PLUMBING CODE |                 |                |             |          |


1 PLUMBING PLAN  
1/8" = 1'-0"

PLUMBING FIXTURES

| TYPE OF FIXTURE OR GROUP OF FIXTURES | VALUE | FIX. | TOTAL |
|--------------------------------------|-------|------|-------|
| BATHTUB (W/ OR W/O OVERHEAD SHOWER)  | 1.4   | 1    | 1.4   |
| CLOTHES WASHER                       | 1.4   | 0    | 0     |
| DISHWASHER                           | 1.4   | 0    | 0     |
| FULL BATH GROUP                      | 3.6   | 7    | 25.2  |
| HALF-BATH GROUP                      | 2.6   | 1    | 2.6   |
| HOSE-BIBB                            | 2.5   | 2    | 5     |
| KITCHEN GROUP                        | 2.5   | 1    | 2.5   |
| KITCHEN SINK                         | 1.4   | 0    | 0     |
| LAUNDRY GROUP                        | 2.5   | 1    | 2.5   |
| LAUNDRY TUB                          | 1.4   | 0    | 0     |
| LAVATORY                             | 0.7   | 1    | 1.4   |
| SHOWER STALL                         | 1.4   | 0    | 0     |
| WATER CLOSET (TANK TYPE)             | 2.2   | 0    | 0     |
| TOTAL FIXTURE COUNT                  |       |      | 40.6  |

DISTANCE TO FROM WATER METER TO FURTHEST  
FIXTURE 120 FT

1" WATER METER W/ 1-1/4" SUPPLY LINE REQUIRED

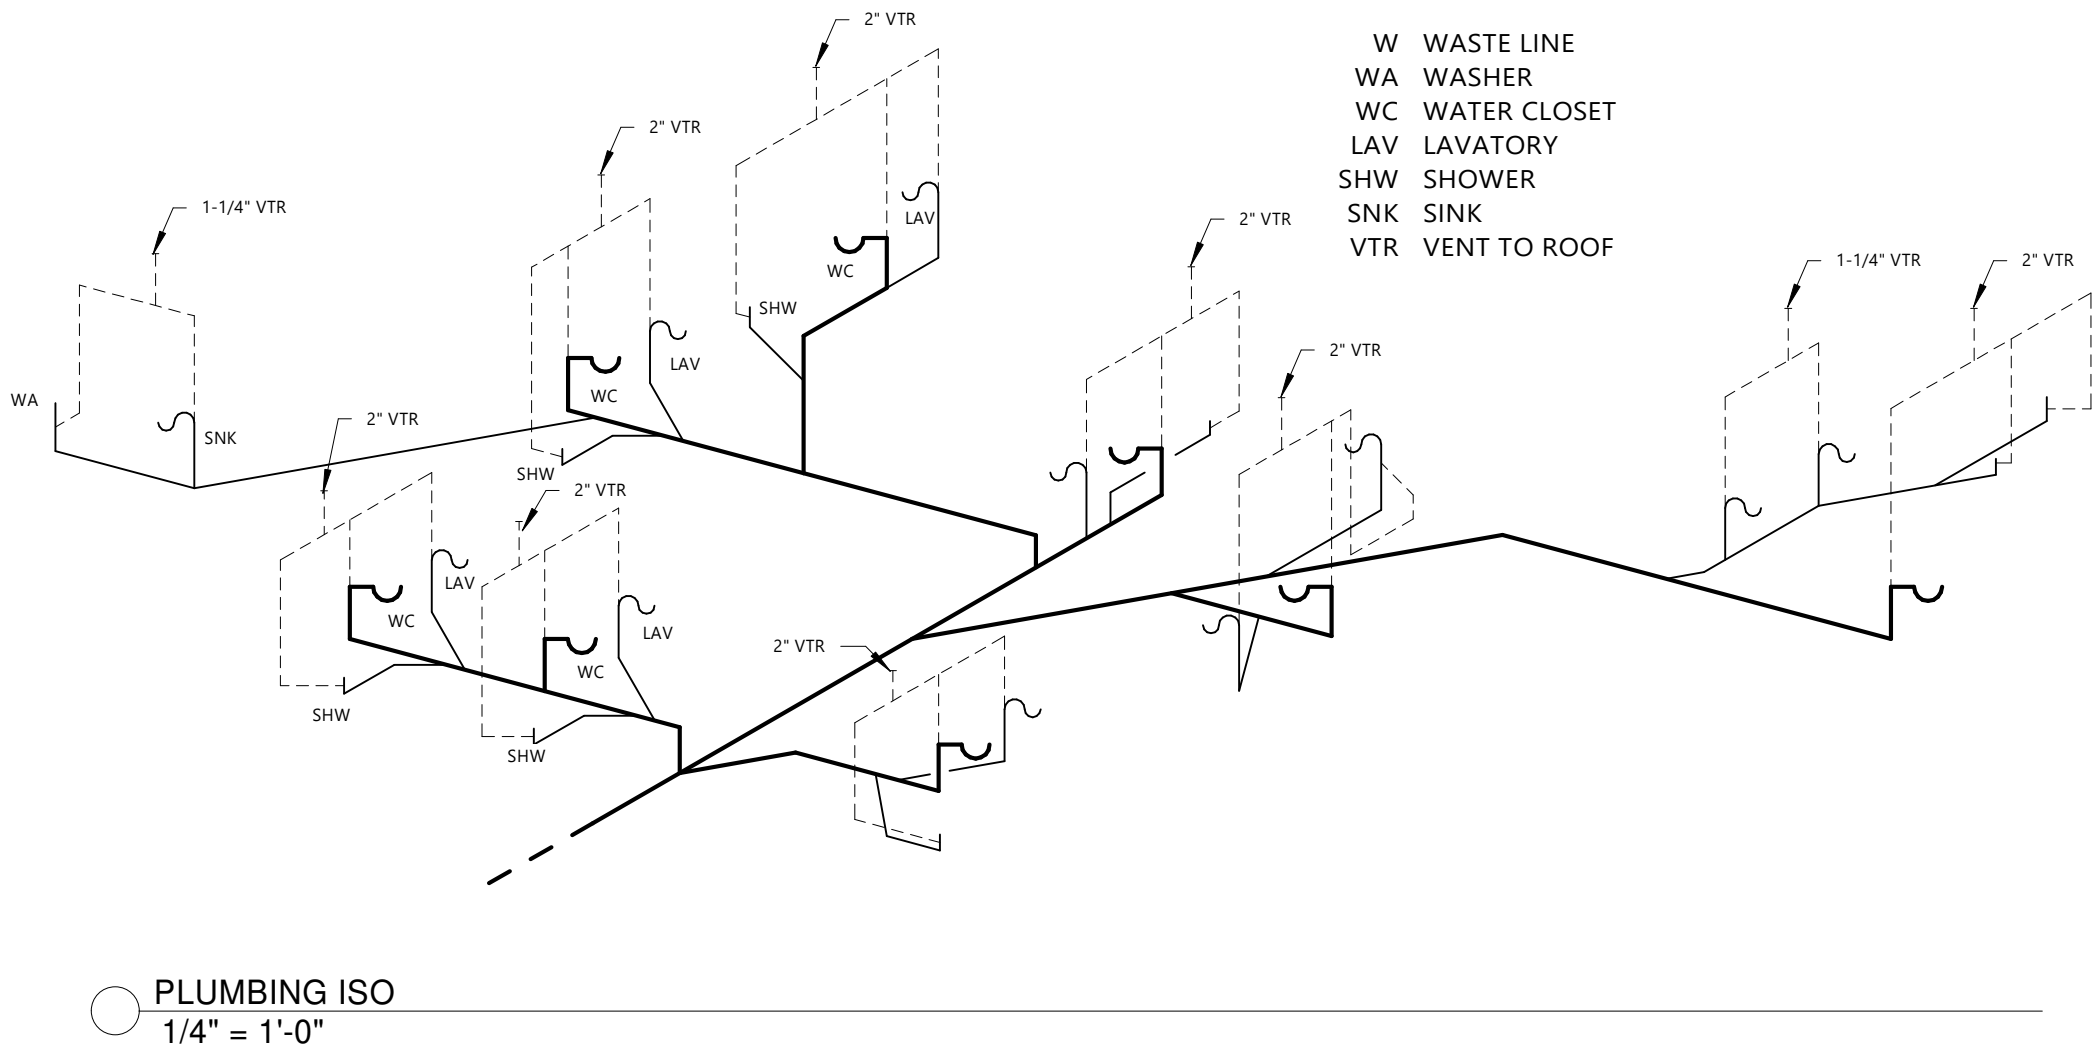

SWENKA RESIDENCE  
12228 N 66TH ST

PLUMBING PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

A108


Scale As indicated



A NEW 4-TON PACKAGED HEAT PUMP. MOUNT ON ROOF CURB. SUPPLY DROP PER PLANS. PROVIDE W/ OSA DAMPER. BALANCE DAMPER TO 60 CFM AND PROGRAM UNIT TO OPERATE 50% OF THE TIME.

B RETURN AIR TRANSFER GRILLE, TYPICAL.

EF-1 BROAN LPDC EXHAUST FAN, TYPICAL.

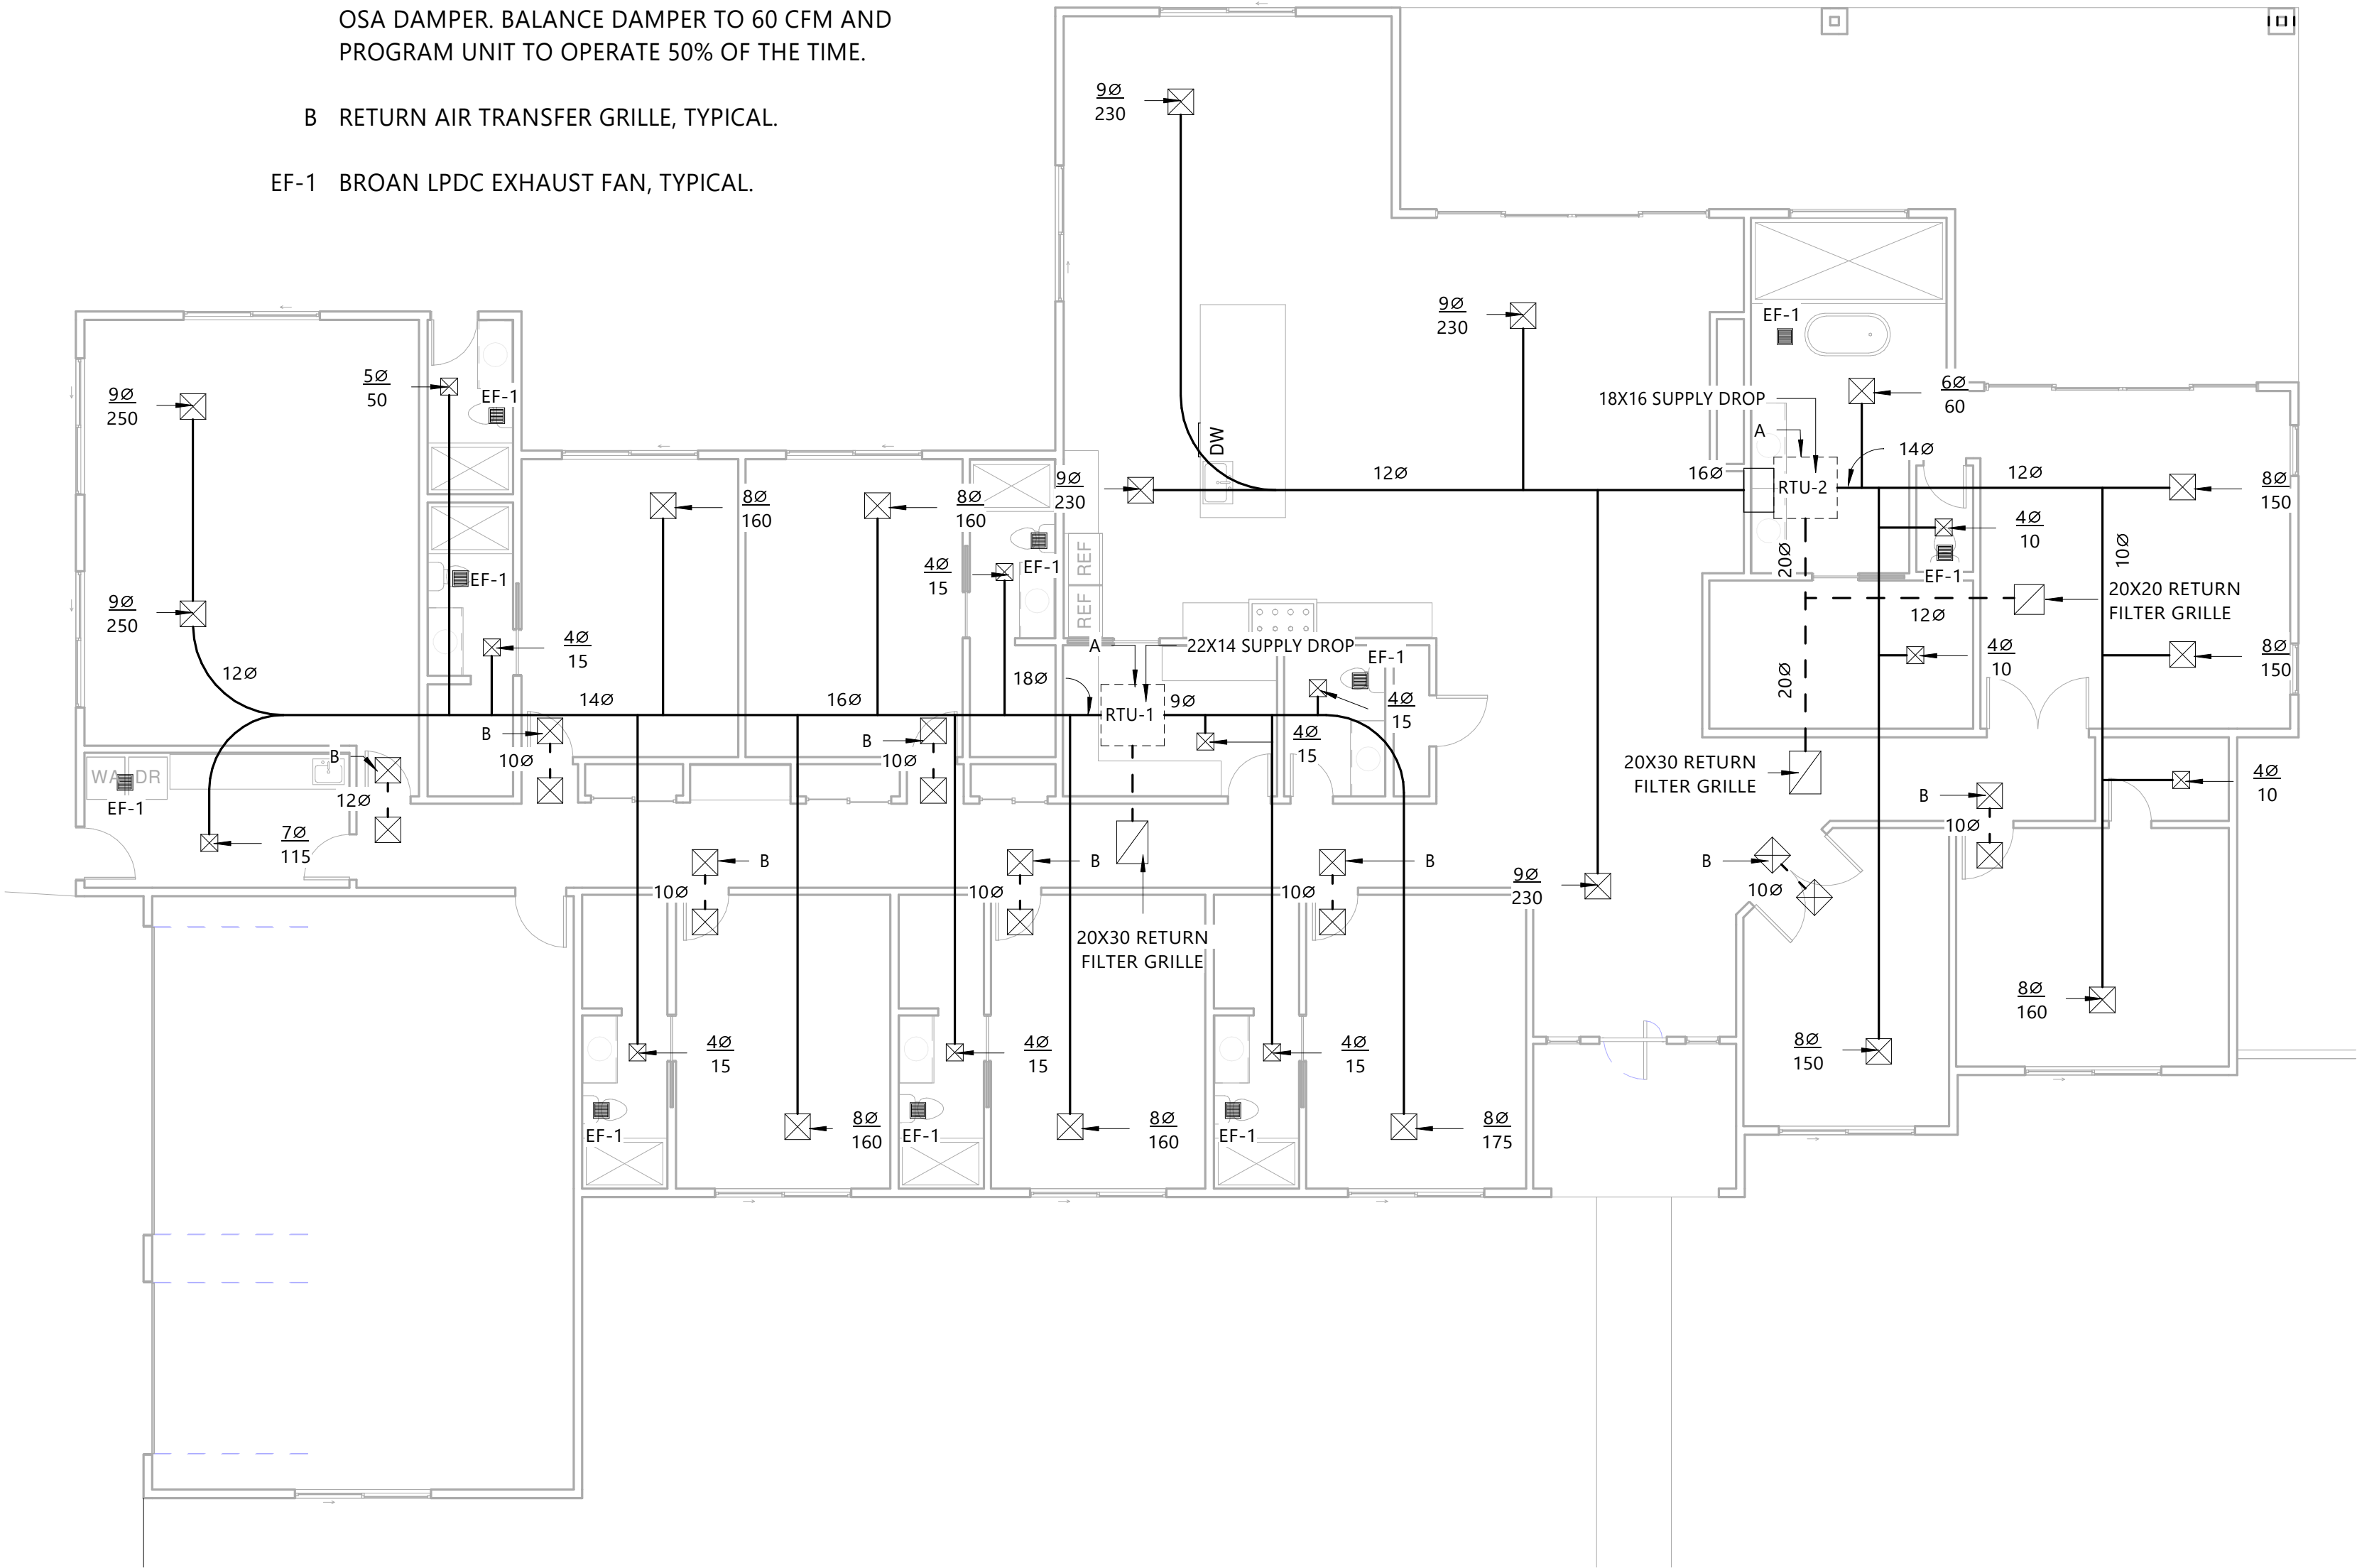

1 MECHANICAL PLAN  
1/8" = 1'-0"

etoddDesign, Inc  
www.etodd.com

GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011



SWENKA RESIDENCE  
12228 N 66TH ST

MECHANICAL PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

A109

Scale As indicated




GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011



1 GAS PLAN  
1/8" = 1'-0"

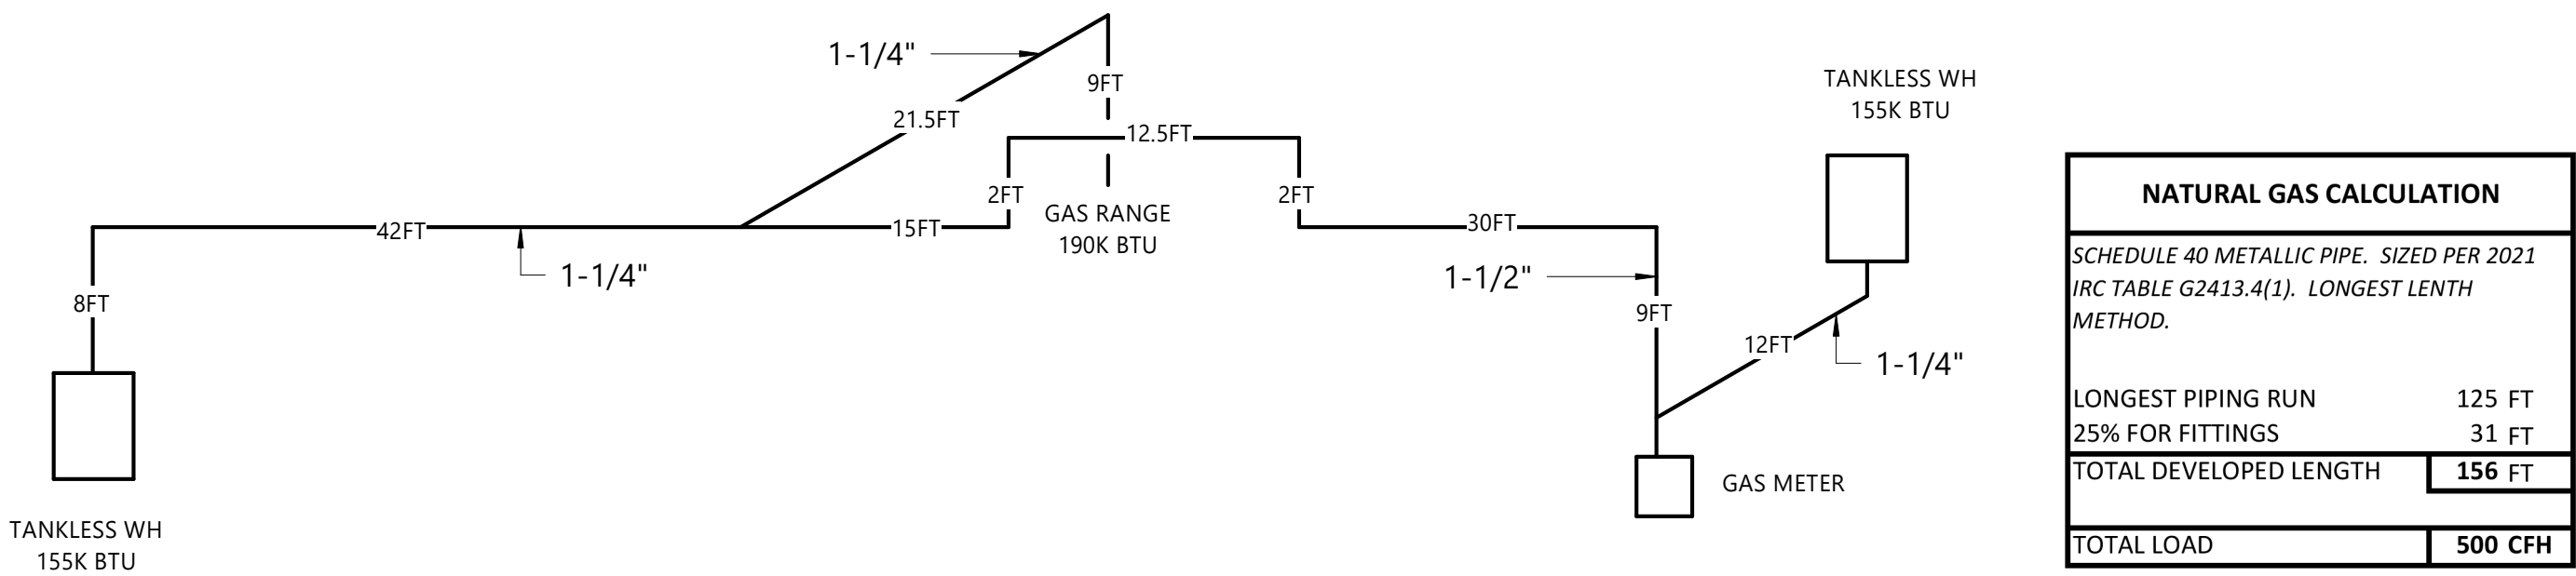

2 GAS PIPING  
1/4" = 1'-0"



SWENKA RESIDENCE  
12228 N 66TH ST

GAS

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

A110

Scale As indicated



200 AMP PANEL A

| PANEL A  | 200 AMP              | 120/240V, 1ϕ, 3W | MAIN L.O. | NEMA 3R        | SURF MTG         |
|----------|----------------------|------------------|-----------|----------------|------------------|
| LOCATION | SOUTH SIDE           |                  | TYPE P.O. | BREAKER RATING | 22K/10K          |
| AWG      | USE/ AREA SERVED     | CB #             | LOAD      | # CB           | USE/ AREA SERVED |
|          |                      |                  | L1        | L2             |                  |
| #12      | ARC F.               | 20               | 1         | 2              | 15               |
| #12      | MASTER BED           | 1                | 3         | 4              | 1                |
| #12      | MASTER BATH          | 3                | 5         | 6              | 1                |
| #12      | LAUNDRY              | 5                | 7         | 8              | 1                |
| #12      | KITCHEN              | 7                | 9         | 10             | 1                |
| #12      | KITCHEN/ PANTRY      | 9                | 11        | 12             | 1                |
| #12      | MECH ROOM            | 11               | 13        | 14             | 1                |
| #12      | GREATROOM            | 13               | 15        | 16             | 1                |
| #12      | BEDROOMS 1, 2, 3     | 15               | 17        | 18             | 1                |
| #12      | BATHROOMS            | 17               | 19        | 20             | 1                |
| #12      | GARAGE, OUTSIDE      | 19               | 21        | 22             | 1                |
| #12      | RANGE HOOD           | 21               | 23        | 24             | 1                |
| #12      | DISHWASHER/ DISPOSAL | 23               | 25        | 26             | 1                |
| #12      | FREEZER              | 25               | 27        | 28             | 1                |
| #12      | REFRIGERATOR         | 27               | 29        | 30             | 1                |
| #12      | MICROWAVE            | 29               | 31        | 32             | 1                |
| #12      | WASHER               | 31               | 33        | 34             | 1                |
| #10      | DRYER                | 33               | 35        | 36             | 1                |
| #10      | OUTLET PROVIDED      | 35               | 37        | 38             | 1                |
| #8       | RANGE                | 37               | 39        | 40             | 1                |
| #8       | OUTLET PROVIDED      | 39               | 2         |                |                  |

200 AMP PANEL B

| PANEL B  | 200 AMP              | 120/240V, 1ϕ, 3W | MAIN L.O. | NEMA 3R        | SURF MTG         |
|----------|----------------------|------------------|-----------|----------------|------------------|
| LOCATION | SOUTH SIDE           |                  | TYPE P.O. | BREAKER RATING | 22K/10K          |
| AWG      | USE/ AREA SERVED     | CB #             | LOAD      | # CB           | USE/ AREA SERVED |
|          |                      |                  | L1        | L2             |                  |
| #12      | ARC F.               | 20               | 1         | 2              | 15               |
| #12      | MASTER BED           | 1                | 3         | 4              | 1                |
| #12      | MASTER BATH          | 3                | 5         | 6              | 1                |
| #12      | LAUNDRY              | 5                | 7         | 8              | 1                |
| #12      | KITCHEN              | 7                | 9         | 10             | 1                |
| #12      | KITCHEN/ PANTRY      | 9                | 11        | 12             | 1                |
| #12      | MECH ROOM            | 11               | 13        | 14             | 1                |
| #12      | GREATROOM            | 13               | 15        | 16             | 1                |
| #12      | BEDROOMS 1, 2, 3     | 15               | 17        | 18             | 1                |
| #12      | BATHROOMS            | 17               | 19        | 20             | 1                |
| #12      | GARAGE, OUTSIDE      | 19               | 21        | 22             | 1                |
| #12      | RANGE HOOD           | 21               | 23        | 24             | 1                |
| #12      | DISHWASHER/ DISPOSAL | 23               | 25        | 26             | 1                |
| #12      | FREEZER              | 25               | 27        | 28             | 1                |
| #12      | REFRIGERATOR         | 27               | 29        | 30             | 1                |
| #12      | MICROWAVE            | 29               | 31        | 32             | 1                |
| #12      | WASHER               | 31               | 33        | 34             | 1                |
| #10      | DRYER                | 33               | 35        | 36             | 1                |
| #10      | OUTLET PROVIDED      | 35               | 37        | 38             | 1                |
| #8       | DOUBLE OVEN          | 37               | 39        | 40             | 1                |
| #8       | OUTLET PROVIDED      | 39               | 2         |                |                  |

LOAD CALCULATION

|                                                      |   |            |  |
|------------------------------------------------------|---|------------|--|
| GENERAL LIGHTING AND RECEPTACLES:                    |   |            |  |
| 1,238 S.F. X 3 VA                                    | = | 3714 VA    |  |
| SMALL APPLIANCES (2 X 1500 VA)                       | = | 3000 VA    |  |
| DISHWASHER/DISPOSAL                                  | = | 1500 VA    |  |
| MICROWAVE                                            | = | 1500 VA    |  |
| REFRIGERATOR                                         | = | 1200 VA    |  |
| BATHROOM CIRCUIT (2 X 1500 VA)                       | = | 3000 VA    |  |
| LAUNDRY CIRCUIT                                      | = | 1500 VA    |  |
| WASHER                                               | = | 1500 VA    |  |
| DRYER                                                | = | 5000 VA    |  |
| RANGE                                                | = | 12000 VA   |  |
| RANGE HOOD                                           | = | 1200 VA    |  |
| SUBTOTAL                                             | = | 35114 VA   |  |
|                                                      |   |            |  |
| FIRST 10KVA AT 100%                                  | = | 10000 VA   |  |
| REMAINDER AT 40%                                     | = | 10045.6 VA |  |
| SUBTOTAL                                             | = | 20045.6 VA |  |
|                                                      |   |            |  |
| AC 1 - 5 TON                                         | = | 7680 VA    |  |
| SUBTOTAL                                             | = | 27725.6 VA |  |
|                                                      |   |            |  |
| 27725.6 VA / 240 V = 115.5 AMPS                      |   |            |  |
|                                                      |   |            |  |
| GENERAL LIGHTING CIRCUITS REQUIRED: 3,975 / 1800 = 3 |   |            |  |

GENERAL ELECTRICAL NOTES:

ALL WORK IS TO BE PERFORMED IN ACCORDANCE WITH THE 2017 NATIONAL ELECTRICAL CODE, THE 2018 INTERNATIONAL RESIDENTIAL CODE, AND ALL APPLICABLE LOCAL CODES, ORDINANCES, AND AMENDMENTS TO THE IRC AND NEC. ALL CODE REFERENCES HEREIN ARE TO THE 2017 NEC.

ALL WIRING IS TO BE COPPER UNLESS OTHERWISE NOTED. INSULATION FOR CONDUCTORS IN CONDUIT SHALL BE TYPE XHHW OR THHN/THWN-2. WIRING FOR OUTSIDE LIGHTING SHALL BE A MINIMUM OF #10 AWG COPPER.

FOR CURCUITS RUN IN CONDUIT OR RACEWAYS, PROVIDE A COPPER BOND WIRE SIZED PER NEC 250.66.

THE CONTRACTOR IS TO CONTACT THE POWER COMPANY REGARDING THE EXACT LOCATION OF ALL PRIMARY SERVICE EQUIPMENT, TRENCHES, TRANSFORMERS, METER AND OTHER SERVICE EQUIPMENT.

THE ELECTRICAL CONTRACTOR SHALL PROVIDE ALL NECESSARY POWER TRENCHING, BACKFILL, SERVICE EQUIPMENT AND CONDUIT STUBS IN TRENCH REQUIRED BY THE POWER COMPANY, INSTALLED PER THE POWER COMPANY'S SPECIFICATIONS.

THE CONTRACTOR IS TO CONTACT THE TELEPHONE COMPANY REGARDING THE EXACT LOCATIONS OF ALL PRIMARY SERVICE EQUIPMENT, TRENCHES, ETC.

THE ELECTRICAL CONTRACTOR SHALL PROVIDE ALL NECESSARY TELEPHONE TRENCHING, BACKFILL, SERVICE EQUIPMENT AND CONDUIT STUBS IN TRENCH REQUIRED BY THE TELEPHONE COMPANY, INSTALLED PER THE TELEPHONE COMPANY'S SPECIFICATIONS.

THE CONTRACTOR IS TO COODINATE EXACT LOCATIONS OF ALL METER ASSEMBLIES AND TELEPHONE SERVICE ENTRANCES WITH POWER AND TELEPHONE COMPANIES BEFORE ROUGH-IN.

SMOKE DETECTORS SHALL BE TYPE APPROVED BY THE "AUTHORITY HAVING JURISDICTION." CONNECT SMOKE DETECTORS TO ALL LOCAL 120V GENERAL LIGHTING AND RECEPTACLE CIRCUIT. INSTALL PER NFPA 74. IBC AND OTHER CODE AS REQUIRED BY THE "AUTHORITY HAVING JURISDICTION." LOCATIONS SHOWN ON PLANS SHALL BE VERIFIED AND APPROVED IN WRITING BY THE "AUTHORITY HAVING JURISDICTION" BEFORE ROUGH-IN.

THE ELECTRICAL CONTRACTOR IS TO COORDINATE WITH THE MECHANICAL CONTRACTOR FOR EXACT LOCATIONS AND REQUIREMENTS OF ALL MECHANICAL EQUIPMENT PRIOR TO ROUGH-IN. THE ELECTRICAL CONTRACTOR SHALL PROVIDE COMPLETE CONNECTIONS TO ALL MECHANICAL EQUIPMENT, AND SHALL PROVIDE STARTERS, CONTACTORS, DISCONNECTS, AND ALL OTHER MATERIALS REQUIRED FOR A COMPLETE, WORKING INSTALLATION. DISCONNECT SWITCHES AT MECHANICAL EQUIPMENT SHALL BE FUSED PER THE EQUIPMENT MANUFACTURER'S REQUIREMENTS. ALL DISCONNECTING MEANS MUST BE INSTALLED TO PROVIDE NEC 110-26 WORKING CLEARANCES.

ALL GENERAL USE RECEPTACLES MOUNTED WITHIN 6" OF A BASIN OR SINK SHALL BE GFI PROTECTED. GENEARL USE RECEPTACLES IN KITCHENS, BATHROOMS, AND GARAGES SHALL BE GFI PROTECTED. EXTERIOR RECEPTACLES SHALL BE GFI PROTECTED AND SHALL HAVE WEATHER PROOF-IN-USE COVERS.

ALL FIXTURE TYPES ARE TO BE SELECTED BY THE OWNER AND/OR GENERAL CONTRACTOR. THE ELECTRICAL CONTRACTOR SHALL VERIFY LOCATIONS OF ALL FIXTURE AND DEVICES PRIOR TO ROUGH-IN. THE ELECTRICAL CONTRACTOR SHALL VERIFY THE SWITCHING SCHEMES AND LOCATIONS AND SHALL ADJUST SAME TO MEET THE OWNER'S REQUIREMENTS.

THE ELECTRICAL CONTRACTOR SHALL PROVIDE, INSTALL, AND WIRE TELEPHONE JACKS AND CABLE TV JACKS AS DIRECTED BY THE OWNER.

RECEPTACLE QUANTITIES AND LOCATIONS SHALL COMPLY WITH NEC 210.52

ALL ELECTRICAL BOXES IN THE WALL BETWEEN THE HOUSE AND GARAGE SHALL BE METAL OR SHALL BE LISTED FOR THE APPLICATION. RECEPTACLES IN GARAGE AND IN THE ADJACENT EQUIPMENT ROOM SHALL BE MOUNTED AT LEAST 18" TO BOTTOM A.F.F.

LIGHT FIXTURES AT SINKS SHALL BE MOUNTED ON THE SINK CENTERLINE.

LIGHT FIXTURES IN CLOTHES CLOSETS SHALL COMPLY WITH NEC 410.8.


CEILING FAN OUTLET BOXES SHALL BE LISTED FOR THE PURPOSE AND SHALL BE SECURELY FASTENED IN PLACE. PROVIDE SPEARATE WALL SWITCHES FOR FAN AND LIGHT.

CIRCUITS FEEDING THE BATHROOM RECEPTACLES SHALL FEED NO OTHER LOADS.

ALL APPLICANCES CALLED OUT BY NAME IN THE LOAD CALCULATION SHALL HAVE DEDICATED CIRCUITS. THE DEDICATED CIRCUITS SHALL NOT BE CONNECTED TO ANY OTHER LOADS.

ALL 120 VOLT, SINGLE PHASE, 15 AND 20 AMPERE BRANCH CURCUITS SUPPLYING OUTLETS INSTALLED IN DWELLING UNIT FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DENS, BEDRROMS, SUNROOMS, RECREATION, ROOMS, CLOSETS, HALLWAYS, OR SIMILAR ROOMS OR AREAS SHALL BE PROTECTED BY A LISTED ARC-FAULT CIRCUIT INTERRUPTER, COMBINATION -TYPE, INSTALLED TO PROVIDE PROTECTION OF THE BRANCH CIRCUIT.

ALL 120 VOLT, SINGLE PHASE, 15 AND 20 AMPERE INTERIOR RECEPTACLES SHALL BE "TAMPER RESISTANT". ALL 120 VOLT, SINGLE PHASE, 15 AND 20 AMPERE EXTERIOR RECEPTACLES SHALL BE "WEATHER RESISTANT".

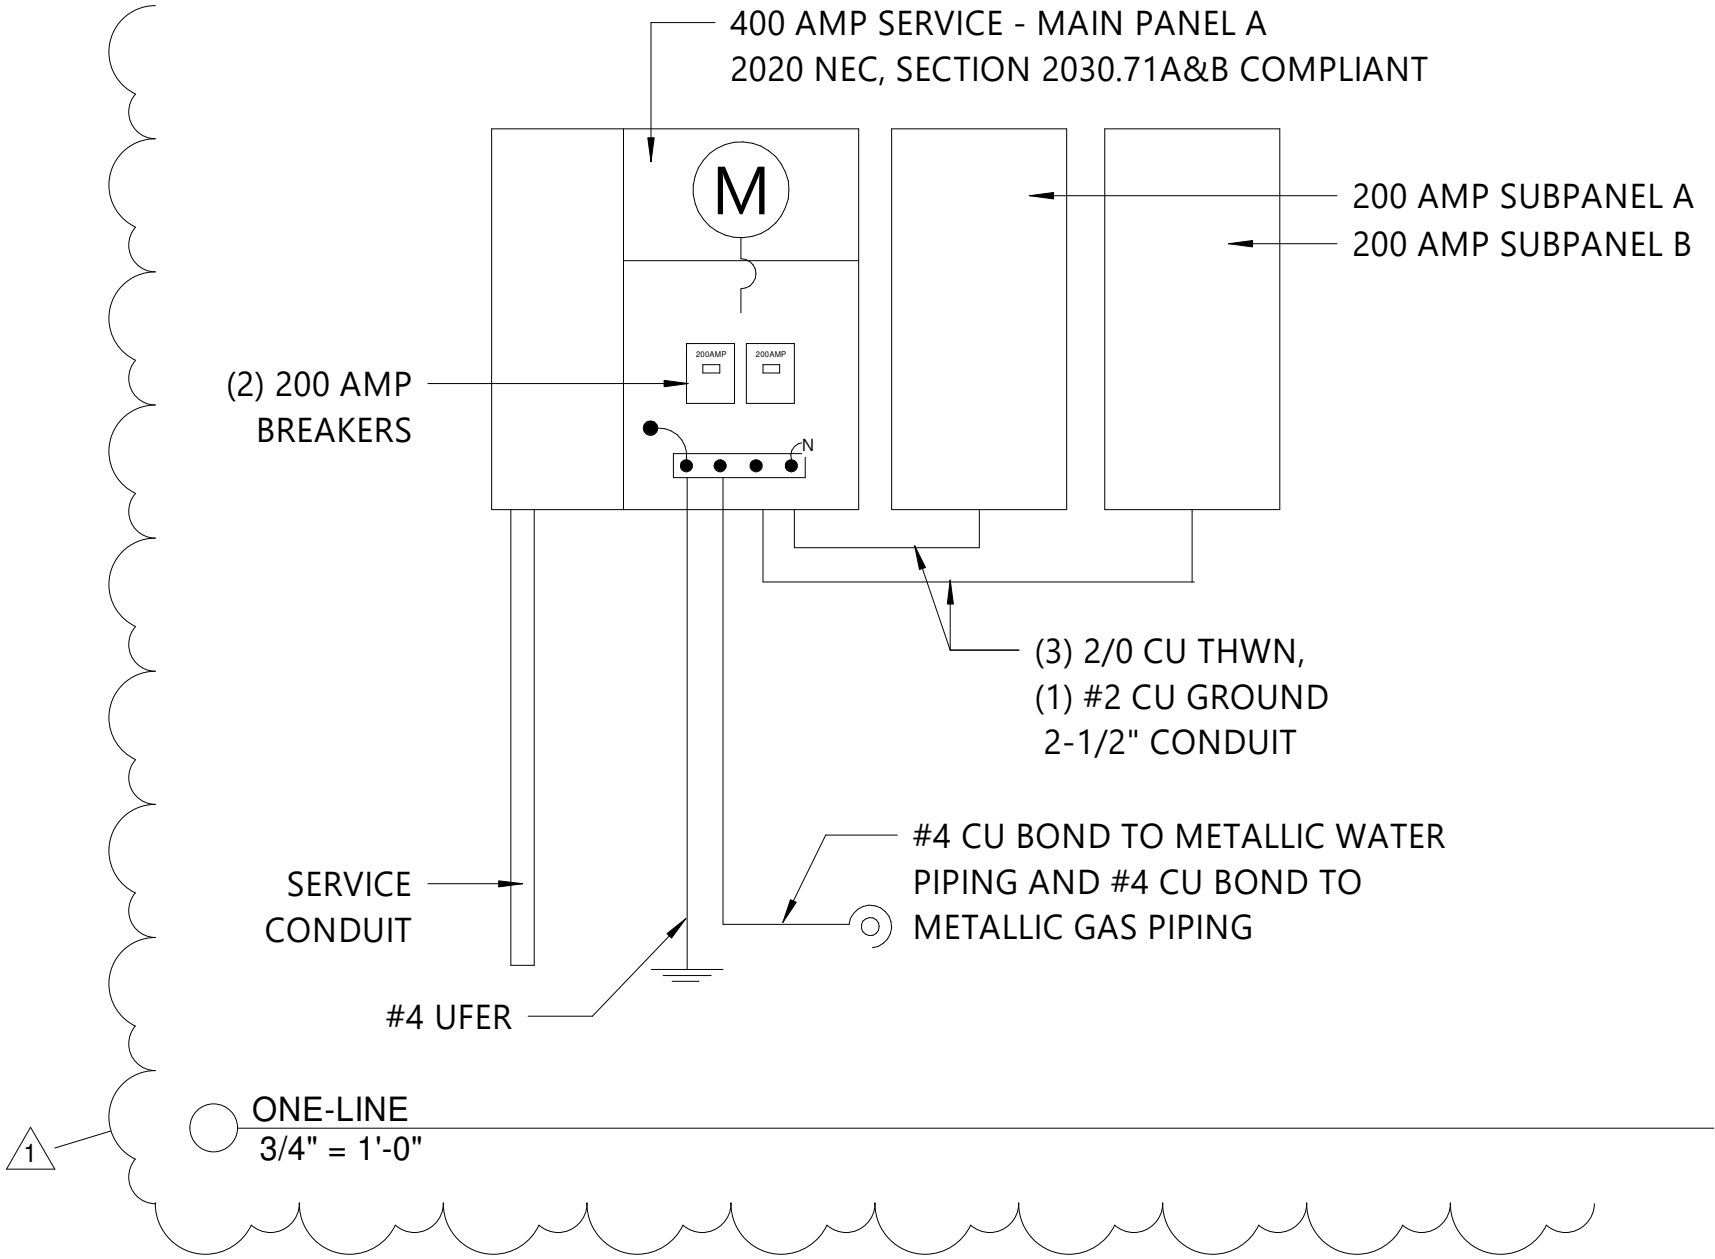

AS NOTED:  
Additional Main Breakers are required  
to be in separate compartments.  
2020 NEC Section 230.71 (A & B) or  
400A Main for the service is required.

SWENKA RESIDENCE  
12228 N 66TH ST

ELECTRICAL

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

E001

Scale 3/4" = 1'-0"




GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

ELECTRICAL NOTES

- EXTERIOR LIGHTING OVER 30 WATTS SHALL  
INCLUDE AN AUTOMATIC SHUT-OFF. N1104.3
- ALL PERMANENTLY INSTALLED LIGHTING  
FIXTURES SHALL CONTAIN ONLY HIGH-  
EFFICACY LAMPS. N1104.1
- ALL PERMANENTLY INSTALLED INTERIOR  
LIGHTING FIXTURES SHALL BE CONTROLLED  
W/ EITHER A DIMMER, AN OCCUPANT  
SENSOR CONTROL OR OTHER CONTROL  
SUCH AS AN AUTOMATIC SHUT-OFF SWITCH.  
EXCEPTIONS INCLUDE BATHROOMS &  
HALLWAYS. N1104.2
- SURGE PROTECTION. ALL ELECTRICAL  
SERVICES SUPPLYING ON- AND TWO-FAMILY  
DWELLING UNITS SHALL BE PROVIDED W/ A  
SURGE PROTECTIVE DEVICE (SPD) INSTALLED  
IN ACCORDANCE W/ SECTIONS E3606.5.1 -  
E3606.5.3
- ELECTRICAL VEHICLE CHARGING CAPACITY.  
RESERVE ELECTRICAL SERVICE PANEL SPACE  
FOR A FULL SIZE 2-POLE CIRCUIT BREAKER  
LABELED "FUTURE EV CHARGING." A  
RACEWAY SHALL BE INSTALLED FROM THE  
ELECTRICAL SERVICE PANEL TO A LOCATION  
W/ IN THE GARAGE, WHERE IT SHALL  
TERMINATE IN A JUNCTION BOX OR OUTLET  
& BE LABELED "FUTURE EV CHARGING."
- SOLAR-READY ZONES -RB103. MIN 10% OF  
ROOF AREA BUT NOT LESS THAN 300 SQFT  
FREE AND CLEAR OF OBSTRUCTIONS  
INCLUDING MECHANICAL EQUIPMENT AND  
VENTS. PROVIDE ELECTRICAL PATHWAY FOR  
CONDUIT FRUN FROM SOLAR-READY ZONE  
TO ELECTRICAL SERVICE PANEL W/ RESERVED  
SPACE FOR 2-POLE CIRCUIT BREAKER. CAPPED  
ROOF PENETRATION SLEEVE SHALL BE  
PROVIDED W/ SLOPE OF 1:12 OR LESS.

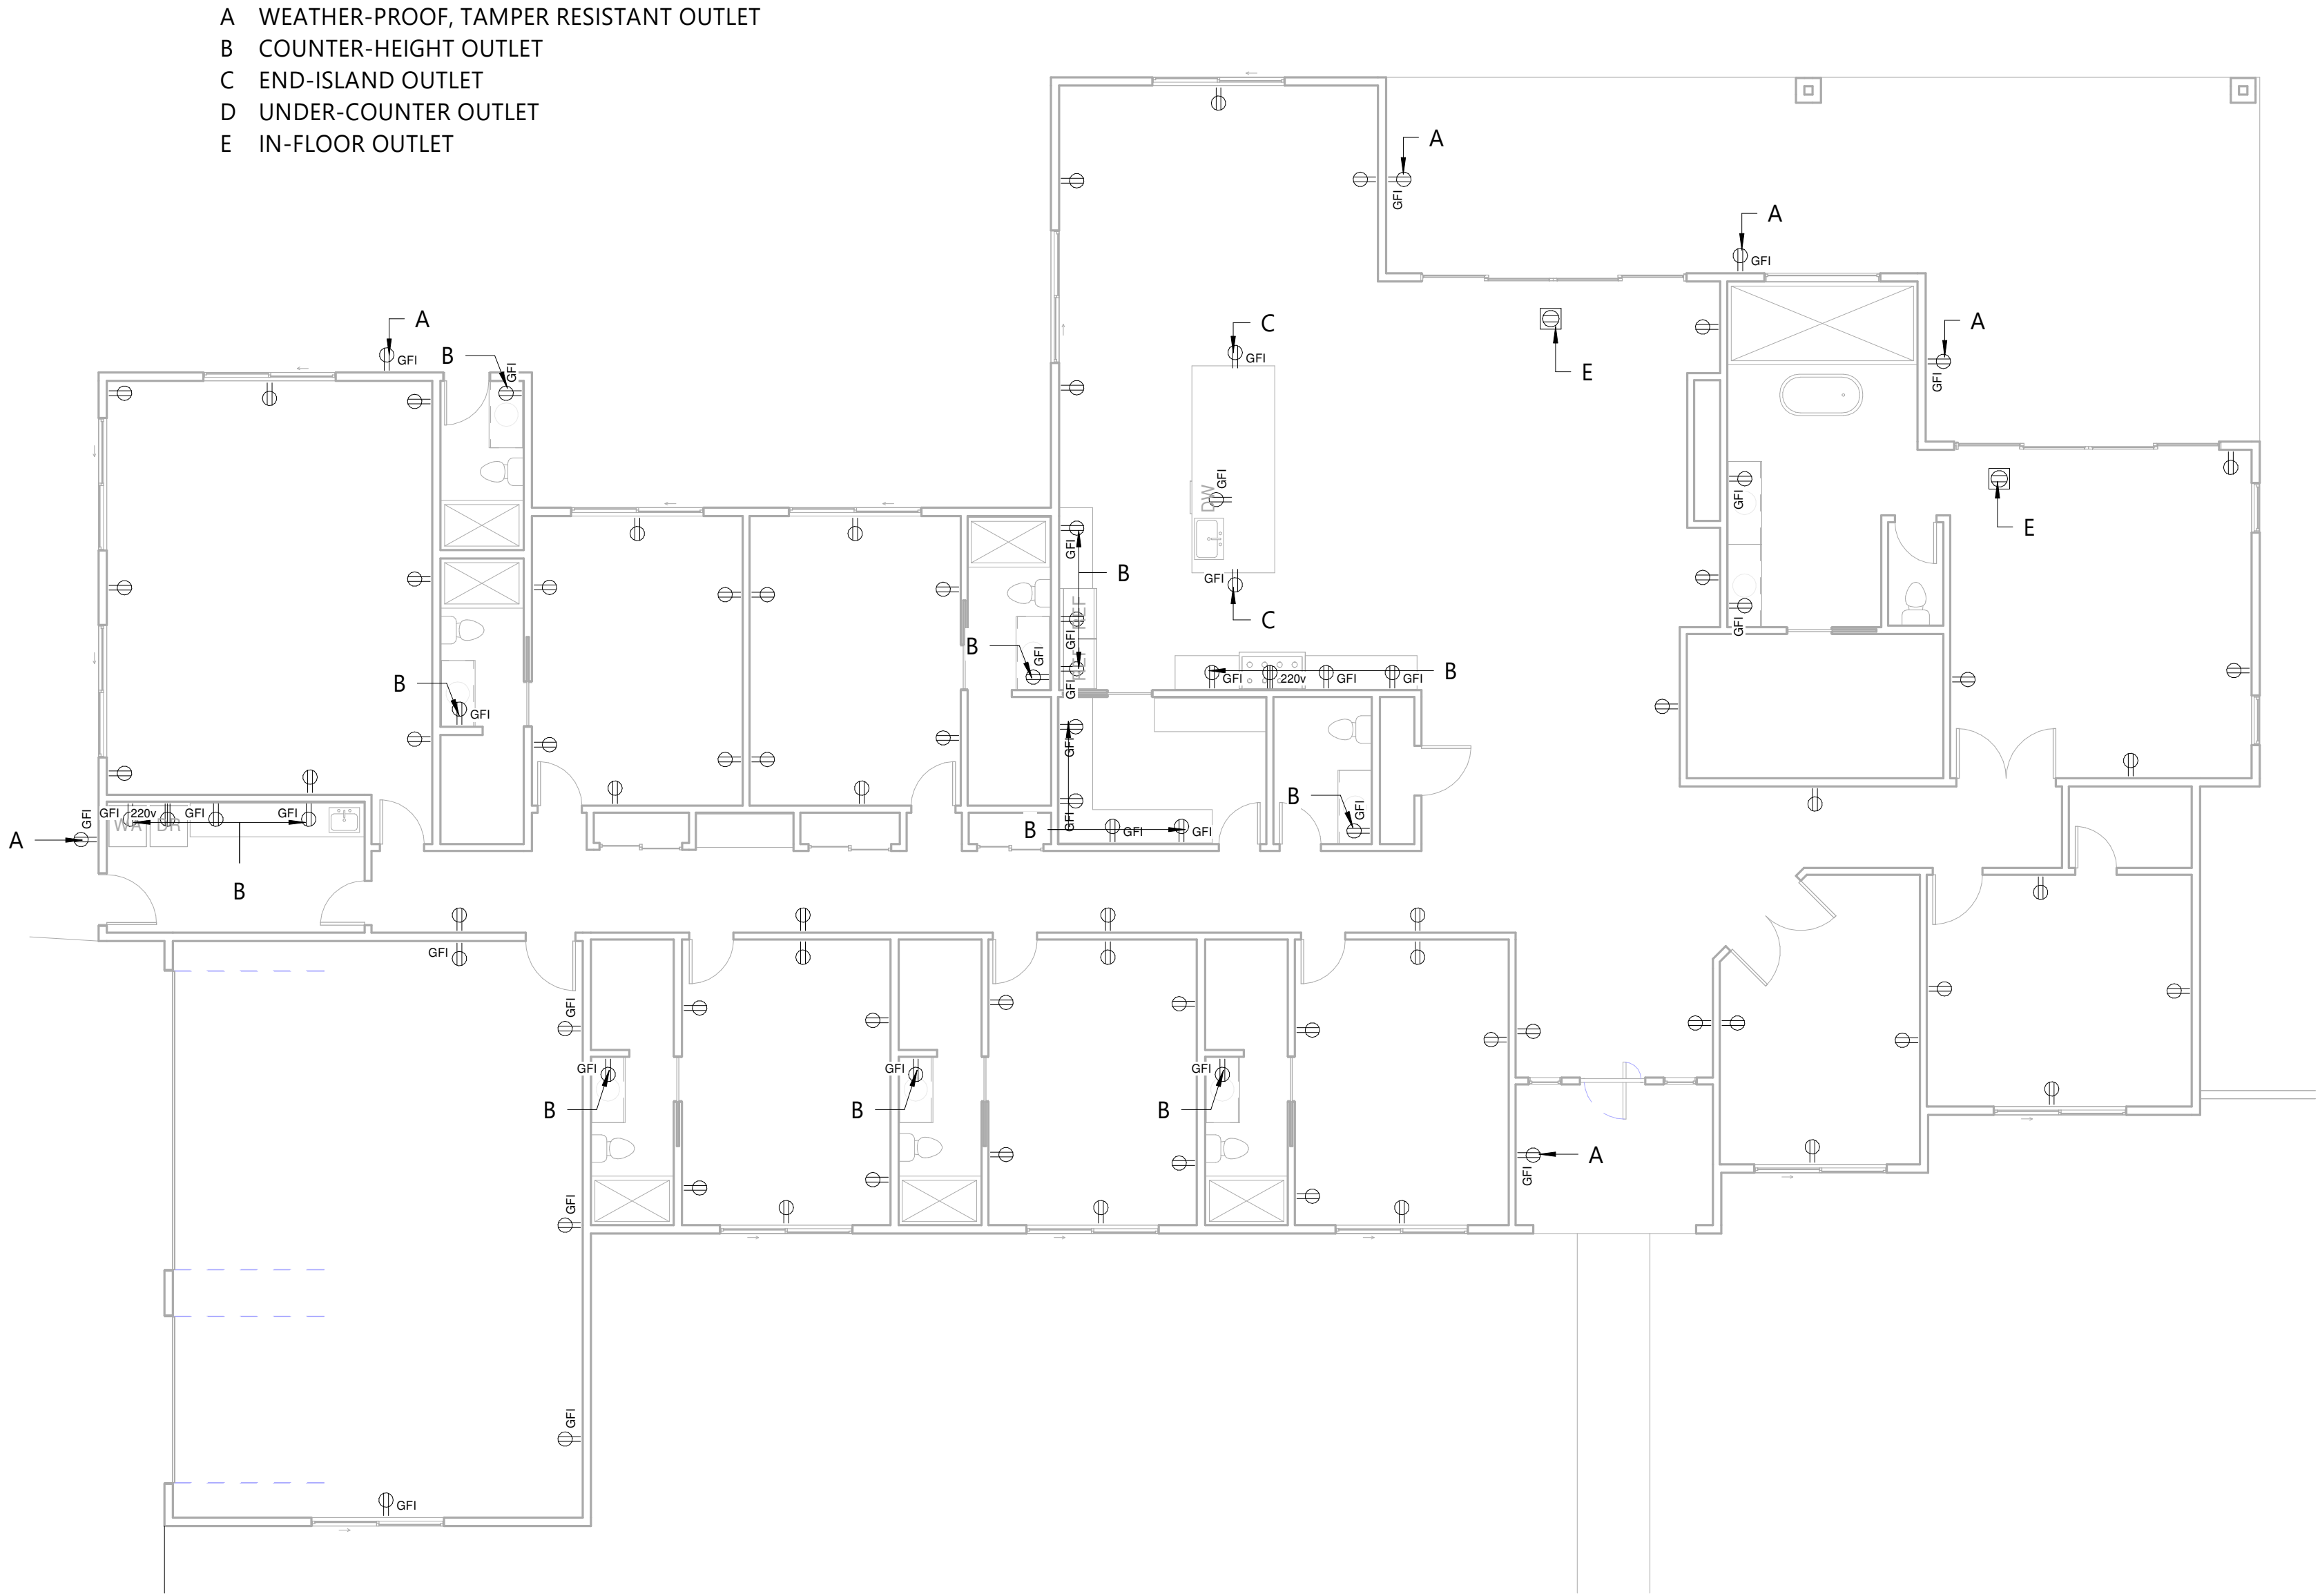

1 POWER PLAN  
1/8" = 1'-0"

SWENKA RESIDENCE  
12228 N 66TH ST

POWER PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

E002

Scale As indicated



GENERAL STRUCTURAL NOTES

BUILDING CODE:

2021 EDITION OF THE INTERNATIONAL BUILDING CODE

LOADS:

ROOF LIVE LOAD = 20 PSF (REDUCIBLE).  
ROOF DEAD LOAD = 22 PSF.

WIND:

115 MPH BASIC WIND SPEED, EXPOSURE C.  
Iw = 1.0.  
INTERNAL PRESSURE COEFFICIENT (GCpi) = 0.18.

SEISMIC:

SDS - 0.221  
SD1 - 0.113  
SEISMIC DESIGN CATEGORY - B  
SITE CLASS - D  
R - 6.5  
DESIGN BASE SHEAR - 0.024 \* W

FOUNDATIONS:

SPREAD FOOTINGS SHALL BEAR ON FIRM, UNDISTURBED SOIL. IN ACCORDANCE WITH 2015 IBC TABLE 1806.2. BOTTOM OF FOOTING TO BE 1'-6" MINIMUM BELOW FINISHED GRADE. FINISHED GRADE IS DEFINED AS TOP OF SLAB FOR INTERIOR FOOTINGS AND LOWEST ADJACENT GRADE WITHIN 5 FEET FOR PERIMETER FOOTINGS. DESIGN SOIL MIN. BEARING VALUE = 1,500 PSF PER IBC TABLE 1806.2, SOIL CLASS 5.

CONCRETE:

MINIMUM 28 DAY STRENGTH 2,500 PSI TYPE II, U.N.O.

MECHANICALLY VIBRATE ALL CONCRETE WHEN PLACED, EXCEPT THAT SLABS ON GRADE NEED BE VIBRATED ONLY AROUND UNDER-FLOOR DUCTS, ETC. MAXIMUM SLUMP 4 1/2" FOR CONCRETE WITHOUT PLASTICIZER. IF PLASTICIZER IS USED, A HIGHER FINAL SLUMP MAY BE ALLOWED UPON STRUCTURAL ENGINEER'S APPROVAL. CAST CLOSURE POUR AROUND COLUMNS AFTER COLUMN DEAD LOAD IS APPLIED. UNLESS APPROVED OTHERWISE IN WRITING BY THE ARCHITECT, ALL CONCRETE SLABS ON GRADE SHALL BE BOUND BY CONTROL JOINTS (KEYED OR SAW CUT), SUCH THAT THE ENCLOSED AREA DOES NOT EXCEED 225 SQUARE FEET. KEYED CONTROL JOINTS NEED ONLY OCCUR AT EXPOSED EDGES DURING POURING. ALL OTHER JOINTS MAY BE SAW CUT. CONTRACTOR SHALL SUBMIT PROPOSED LOCATIONS FOR APPROVAL PRIOR TO CONSTRUCTION.

CONCRETE SLAB ON GRADE SHALL BE 4" THICKNESS WITH 6x6 W2.1 x W2.1 W.W.F. UNLESS NOTED OTHERWISE. INSTALL OVER 4" MINIMUM A.B.C. FILL. REFER TO SOILS REPORT FOR ADDITIOANL INFORMATION.

REINFORCING:

ASTM A615 (Fy = 60 KSI) DEFORMED BARS FOR ALL BARS. ALL GRADE 60 REINFORCING TO BE WELDED SHALL BE ASTM A706. WELDED WIRE FABRIC PER ASTM A185, WIRE PER ASTM A82. NO TACK WELDING OF REINFORCING BARS ALLOWED WITHOUT PRIOR REVIEW OF PROCEDURE WITH THE STRUCTURAL ENGINEER. LATEST ACI CODE AND DETAILING MANUAL APPLY. CLEAR CONCRETE COVERAGES AS FOLLOWS:

CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH ----- 3"  
EXPOSED TO EARTH OR WEATHER  
#6 OR LARGER ----- 2"  
#5 AND SMALLER ----- 1 1/2"  
COLUMNS (TO TIES) ----- 1 1/2"  
BEAMS (TO STIRRUPS) ----- 1 1/2"  
FLAT SLAB ----- 3/4"  
ALL OTHER PER LATEST EDITION OF ACI 318.

LAP SPLICES IN CONCRETE:

LAP SPLICES, UNLESS NOTED OTHERWISE, SHALL BE CLASS "B" TENSION LAP SPLICES PER LATEST EDITION OF ACI 318. LAP SPLICES IN CONCRETE COLUMNS SHALL BE STANDARD COMPRESSION LAP SPLICES. STAGGER SPLICES A MINIMUM OF ONE LAP LENGTH. LAPS IN WELDED WIRE FABRIC SHALL BE MADE SO THAT THE OVERLAP, MEASURED BETWEEN OUTERMOST CROSS WIRES OF EACH FABRIC SHEET, IS NOT LESS THAN THE SPACING OF CROSS WIRES PLUS 2 INCHES. ALL WELDED WIRE FABRIC SHALL BE CHAIRED TO ENSURE PROPER CLEARANCES.

ALL SPLICE LOCATIONS SUBJECT TO APPROVAL BY THE STRUCTURAL ENGINEER. PROVIDE BENT CORNER BARS TO MATCH AND LAP WITH HORIZONTAL BARS AT ALL CORNERS AND INTERSECTIONS PER TYPICAL DETAILS. REINFORCING BAR SPACING GIVEN ARE MAXIMUM ON CENTERS. ALL BARS PER CRSI SPECIFICATIONS AND HANDBOOK. DOWEL ALL VERTICAL REINFORCING TO FOUNDATION WITH STANDARD 90-DEGREE HOOKS UNLESS NOTED OTHERWISE. SECURELY TIE ALL BARS IN LOCATION BEFORE PLACING CONCRETE. CONCRETE COLUMN DOWEL EMBEDMENT SHALL BE A STANDARD COMPRESSION DOWEL WITH EMBEDMENT LENGTH ACCORDING TO THE LATEST EDITION OF THE ACI 318. (UNLESS NOTED OTHERWISE ON PLANS OR DETAILS).

WOOD:

SAWN LUMBER:

FRAMING LUMBER SHALL COMPLY WITH THE LATEST EDITION OF THE GRADING RULES OF THE WESTERN WOOD PRODUCTS ASSOCIATION (WWPA) OR THE WEST COAST LUMBER INSPECTION BUREAU (WCLIB). MAXIMUM MOISTURE CONTENT AT TIME OF INSTALL AND IN SERVICE NOT TO EXCEED 19%. ALL MEMBER SIZES SHOWN IN STRUCTURAL DRAWINGS ARE NOMINAL SIZES U.N.O. ALL SAWN LUMBER SHALL BE STAMPED WITH THE GRADE MARK OF AN APPROVED LUMBER GRADING AGENCY AND SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES (USE OTHER GRADES WHEN NOTED ON PLANS):

| SPECIES & GRADE                                | ALL DESIGN VALUES LISTED IN POUNDS PER SQ. INCH (PSI) |       |     |     |         |                 |
|------------------------------------------------|-------------------------------------------------------|-------|-----|-----|---------|-----------------|
|                                                |                                                       | Fb    | Ft  | Fv  | Fc perp | Fc E            |
| 2x4 SUBPURLINS IN PANELIZED ROOF               | DF-L #1&Btr                                           | 1,200 | 800 | 180 | 625     | 1,550 1,800,000 |
| 2x,3x,&4x                                      | DF-L #2                                               | 900   | 575 | 180 | 625     | 1,350 1,600,000 |
| POST AND TIMBERS (6x6,and larger)              | DF-L #1                                               | 1,200 | 825 | 170 | 625     | 1,000 1,600,000 |
| BEAMS AND STRINGERS (i.e.6x10,6x12 8x12, ETC.) | DF-L #1                                               | 1,350 | 675 | 170 | 625     | 925 1,600,000   |

DOWEL TYPE FASTENERS:

USE COMMON NAILS WHERE DRAWINGS SHOW PENNYWEIGHT NAIL SIZES UNLESS NOTED OTHERWISE IN THE STRUCTURAL DRAWING. BOX, SINKER, OR OTHER NAILS TYPES DO NOT ACHIEVE THE REQUIRED CONNECTION STRENGTH. POWER DRIVEN NAILS MAY BE USED. THEY MUST BE EQUIVALENT IN LENGTH AND SHANK DIAMETER TO THE PENNYWEIGHT NAILS THEY ARE REPLACING. ALL POWER DRIVEN FASTENERS SHALL BE MANUFACTURED AND INSTALLED PER ESR-1539. ALL NAILING SHALL BE PER IBC TABLE 2304.9.1 UNLESS NOTED OTHERWISE IN THE STRUCTURAL DRAWINGS. ATTACH ALL MECHANICAL FRAMING ANCHORS AND HANGERS WITH COMMON NAILS OR OTHER APPROVED FASTENERS PER THE MANUFACTURER'S SPECIFICATIONS TO ACHIEVE 100% OF THE MAXIMUM LISTED CAPACITY OF THE HANGER UNLESS NOTED OTHERWISE. COMMON NAILS SHALL BE OF THE FOLLOWING MINIMUM DIMENSIONS:

| PENNYWEIGHT | SHANK DIAMETER | LENGTH | HEAD DIAMETER | MIN. EMBEDMENT |
|-------------|----------------|--------|---------------|----------------|
| 6d          | 0.113"         | 2"     | 0.266"        | 1 1/4"         |
| 8d          | 0.131"         | 2 1/2" | 0.281"        | 1 3/8"         |
| 10d         | 0.148"         | 3"     | 0.312"        | 1 1/2"         |
| 16d         | 0.162"         | 3 1/2" | 0.344"        | 1 5/8"         |
| 20d         | 0.192"         | 4"     | 0.406"        | 2"             |

HOLES FOR BOLTS SHALL BE A MINIMUM OF 1/32" AND A MAXIMUM OF 1/16" LARGER THAN THE BOLT SHANK DIAMETER. A METAL PLATE, STRAP, OR WASHER NOT LESS THAN A STANDARD CUT WASHER SHALL BE BETWEEN THE WOOD AND THE BOLT HEAD AND THE WOOD AND THE NUT. PREDRILL LEAD HOLES AS REQUIRED TO PREVENT SPLITTING. WHERE SCREWS ARE INDICATED FOR WOOD TO WOOD ATTACHMENT USE STANDARD WOOD SCREWS (PER ANSI B18.6.1) UNLESS NOTED OTHERWISE.

ENGINEERED WOOD PRODUCTS. (GLULAM) (PSL) (LSL):

ALL ENGINEERED LUMBER SHALL BE FABRICATED USING WATERPROOF GLUE. FABRICATION AND HANDLING PER LATEST AITC AND WCLA STANDARDS. BEAM TO BEAR GRADE STAMP AND ATIC STAMP AND CERTIFICATE. CAMBER AS SHOWN ON DRAWINGS. PRODUCTS SHALL BE MANUFACTURED, HANDLED, AND INSTALLED PER LATEST CODE APPROVAL REPORTS. ALL WOOD PRODUCTS EXPOSED TO WEATHER SHALL BE TREATED PER THE PROJECT SPECIFICATIONS.

GLUED-LAMINATED BEAMS SHALL HAVE THE FOLLOWING MINIMUM PROPERTIES: Fb = 2,400 PSI, Fv = 240 PSI, Fc (PERPENDICULAR) = 650 PSI, Fc (PARALLEL) = 1,650 PSI, Ft = 1150 PSI, E = 1,800,000 PSI. BEAMS CONTINUOUS OVER SUPPORTS OR SUPPORTING SHEAR WALL SHALL HAVE THE SPECIFIED MINIMUM Fb = 2,400 PSI, TOP AND BOTTOM. MAXIMUM MOISTURE CONTENT AT TIME OF INSTALL AND IN SERVICE NOT TO EXCEPT 16%.

PLYWOOD:

ALL PLYWOOD SHALL BE C-D INTERIOR SHEATHING, STRUCTURAL 2 OR BETTER WITH EXTERIOR GLUE AND SHALL BEAR THE STAMP OF AN APPROVED TESTING AGENCY. LAY UP PLYWOOD WITH FACE GRAIN PERPENDICULAR TO SUPPORTS. (ON ROOFS WHERE PLYWOOD IS LAYED UP WITH FACE GRAIN PARALLEL TO SUPPORTS, USE A MINIMUM OF 5-PLY PLYWOOD). MAXIMUM MOISTURE CONTENT AT TIME OF INSTALLATION TO BE LESS THAN 16%. STAGGER JOINTS. ALL NAILING, COMMON NAILS. WHERE SCREWS ARE INDICATED FOR WOOD TO WOOD ATTACHMENTS, USE WOOD SCREWS. ALL PLYWOOD SHALL BE OF THE FOLLOWING NOMINAL THICKNESS, SPAN/INDEX RATIO AND SHALL BE ATTACHED AS FOLLOWS UNLESS NOTED OTHERWISE:

| USE         | SPAN/INDEX   |       | EDGE ATTACHMENT  | INTERMEDIATE ATTACHMENT |
|-------------|--------------|-------|------------------|-------------------------|
|             | THICKNESS    | RATIO |                  |                         |
| ROOF -----  | 1/2"         | 48/24 | 8d @ 6" O.C.     | 8d @ 12" O.C.           |
| FLOOR ----- | 3/4" T & G-- | 48/24 | SCREWS @ 6" O.C. | SCREWS @ 10" O.C.       |
| WALL -----  | 3/8"         | 32/16 | 8d @ 6" O.C.     | 8d @ 12" O.C.           |

WOOD SCREWS AT FLOOR SHEATHING SHALL BE #8 X 2-1/2" LONG FOR SHEATHING LESS THAN 1" THICK. SCREWS AT FLOOR SHEATHING SHALL BE #8 X 3" LONG FOR SHEATHING LESS THAN 1-1/4" THICK. ALL FLOOR SHEATHING SHALL BE GLUED TO JOISTS WITH AN APA AGF-01 QUALIFIED GLUE.

ALTERNATE:

AMERICAN PLYWOOD ASSOCIATION (APA) PERFORMANCE RATED SHEATHING MAY BE USED AS AN ALTERNATE TO PLYWOOD WITH PRIOR APPROVAL OF OWNER, ARCHITECT AND ROOFING CONTRACTOR. WHERE ROOF IS TO BE GUARANTEED, IT MAY NOT BE USED WITHOUT PRIOR APPROVAL FROM BUILT-UP ROOF SYSTEM MANUFACTURER. RATED SHEATHING SHALL COMPLY WITH I.C.C. REPORT NO. NER-108, EXPOSURE 1, AND SHALL HAVE A SPAN RATING EQUIVALENT TO OR BETTER THAN THE PLYWOOD IT REPLACES. ATTACHMENT AND THICKNESS (WITHIN 1/32") SHALL BE THE SAME AS THE PLYWOOD IT REPLACES. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.

EXPANSION AND SCREW ANCHORS:

USE STUD TYPE EXPANSION ANCHOR WITH A SINGLE PEECE WEDGE ONLY WHERE NOTED ON PLANS. IF USE IS REQUESTED FOR OTHER THAN WHERE NOTED CONTACT STRUCTURAL ENGINEER THROUGH ARCHITECT FOR APPROVAL.

CONTRACTOR SHALL SUBMIT MANUFACTURER'S SIZE AND STRENGTH DATA TO ENGINEER THROUGH ARCHITECT PRIOR TO CONSTRUCTION. INSTALL ALL BOLTS AS OUTLINED IN MANUFACTURER'S SPECIFICATIONS, UTILIZING PROPER SIZE AND TYPE OF DRILL, CLEANING HOLE, DRIVING AND TIGHTENING BOLT.

IN CONCRETE:

ANCHORS USED MUST HAVE ICC APPROVAL AND INCLUDE HILTI KWIK BOLT TZ (ESR-1917), AND SIMPSON STRONG BOLT (ESR-1771), AND SIMPSON TITEN HD (ESR-2713), HILTI KWIK HUS-EZ (ESR-3027), OR APPROVED EQUAL.

EPOXY ANCHORS IN CONCRETE:

INJECTABLE ADHESIVE SHALL BE USED FOR INSTALLATION OF REINFORCING STEEL DOWELS OR THREADED ANCHOR RODS AND INSERTS INTO NEW OR EXISTING CONCRETE OR SOLID GROUTED CONCRETE MASONRY UNITS ONLY WHERE SPECIFIED ON PLANS. IF USE IS REQUESTED FOR OTHER THAN WHERE NOTED CONTACT STRUCTURAL ENGINEER THROUGH ARCHITECT FOR APPROVAL. ADHESIVE SHALL BE FURNISHED IN SIDE BY SIDE PACKS WHICH KEEP COMPONENT A AND COMPONENT B SEPARATE. USE ONLY INJECTION TOOLS AND STATIC MIXING NOZZLES RECOMMENDED BY MANUFACTURER. MANUFACTURER'S INSTRUCTIONS SHALL BE FOLLOWED.

IN CONCRETE:

ANCHORS USED MUST HAVE I.C.C. APPROVAL IN CRACKED CONCRETE AND INCLUDE SIMPSON SET-XP (ESR-2508), HILTI HIT-RE500-SD (ESR-2322), OR APPROVED EQUIVALENT. THE USE OF ANY EPOXY ANCHOR MUST BE APPROVED BY THE ENGINEER OF RECORD PRIOR TO INSTALLATION.

NOTES ON CRACKING OF CONCRETE STRUCTURES:

CRACKING IS INHERENT TO THE MATERIAL PROPERTIES OF CONCRETE CONSTRUCTION (INCLUDING POST-TENSIONED CONCRETE STRUCTURES), WHILE EVER EFFORT HAS BEEN MADE TO MINIMIZE THE EFFECTS OF UNSIGHTLY CRACKING, THE PRESENCE OF CRACKS ARE NORMAL AND UNAVOIDABLE. THE DESIGN OF THE CONCRETE STRUCTURAL ITEMS HAVE BEEN ANALYZED USING A "CRACKING SECTION." THE PRESENCE OF THE CRACKING SHOULD NOT BE CONSIDERED DETRIMENTAL TO THE STRUCTURE. CRACKS LARGER THAN 10 MILS SHALL BE FILLED AND SEALED WITH AM APPROVED CRACK FILLER TO PREVENT FUTURE DETERIORATION. ALLOWANCE SHALL BE MADE IN THE CONSTRUCTION BUDGET FOR SEALING OF SUCH CRACKS. IN SOME CASE, CRACKS DO NOT APPEAR UNTIL WELL AFTER CONSTRUCTION HAS BEEN COMPLETED. IT IS THE RESPONSIBILITY OF THE OWNER TO MAINTAIN THE STRUCTURE PROPERLY OVER THE LIFE OF THE STRUCTURE. CONCRETE CRACKS, SHOULD THEY OCCUR, SHALL BE FILLED AND SEALED TO PREVENT PREMATURE DETERIORATION OF THE STRUCTURE.

GENERAL:

ENTIRE CONTRACT DOCUMENTS SHALL BE USED TO BUILD BUILDING. SOME CRITICAL ITEMS REQUIRED BY OTHER DISCIPLINES MAY NOT BE SHOWN ON STRUCTURAL DRAWING (i.e. WALL, FLOOR AND ROOF OPENING, ARCHITECTURAL, MECHANICAL AND PLUMBING LOADS, SUPPORT PLATES ETC.)

ITEMS SHOWN BY OTHER DISCIPLINES WITH REFERENCE TO STRUCTURAL DRAWING BUT NOT SHOWN ON THESE STRUCTURAL DOCUMENT SHALL BE CONSIDERED DESIGN BUILD ITEMS. CONTRACTOR SHALL SUBMIT DESIGN BY OTHERS FOR REVIEW.

THE STRUCTURAL CONSTRUCTION DOCUMENTS REPRESENT THE FINISHED STRUCTURE. THEY DO NOT INDICATE THE METHOD OF CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE ALL MEASURES NECESSARY TO PROTECT THE STRUCTURE DURING CONSTRUCTION. SUCH MEASURES SHALL INCLUDE, BUT NOT BE LIMITED TO, BRACING, SHORING FOR LOADS DUE TO CONSTRUCTION EQUIPMENT, ETC. THE STRUCTURAL ENGINEER SHALL NOT BE RESPONSIBLE FOR THE CONTRACTOR'S MEANS, METHODS, TECHNIQUES, SEQUENCES FOR PROCEDURE OF CONSTRUCTION, OR THE SAFETY PRECAUTIONS AND THE PROGRAMS INCIDENT THERETO (NOR SHALL OBSERVATION VISITS TO THE SITE INCLUDE INSPECTION OF THESE ITEMS).

DEFERRED SUBMITTALS:  
WOOD TRUSSES

| WOOD STUD HOLDOWN SCHEDULE                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                      |                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------|
| HOLDOWN DESIGNATION                                                                                                                                                                                                                                                                                                                                                                                                                                    | HOLDOWN TYPE                                                         | ALLOWABLE TENSION (LBS) |
| ①                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SIMPSON LTT2 W/ (12) 10d NAILS & 1/2" Ø ANCHOR BOLTS (8" EMBEDMENT)  | 1,680                   |
| ②                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SIMPSON HTT4 W/ (18) 16d NAILS & 5/8" Ø ANCHOR BOLTS (12" EMBEDMENT) | 4,235                   |
| NOTES:<br>1. PROVIDE MINIMUM EMBEDMENT OF HOLDOWN ANCHORS AT FOUNDATION U.N.O. - THICKEN FOUNDATION TO 12" X 12" X 12" THICK MIN. AS REQUIRED.<br>2. INSTALL THE HOLDOWN PER THE MANUFACTURERS RECOMMENDATIONS.<br>3. THE CONTRACTOR MAY SUSTITUTE THE REFERENCED SIMPSON STRONG-TIE HOLDDOWNS W/ A DIFFERENT MANUFACTURER GRANTED THE SUBSTITUTING HOLDDOWN HAS AN ALLOWABLE TENSION VALUE EQUIVALENT OR BETTER THAN THOSE LISTED IN THE TABLE ABOVE. |                                                                      |                         |

| WOOD STUD SHEAR WALL (SW) SHEATHING                                                                                                                                                                                                                                                                                                                                                                         |                                                          |                                                   |                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|---------------------------------------------------|-----------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                             |                                                          |                                                   |                       |
| SHEARWALL DESIGNATION                                                                                                                                                                                                                                                                                                                                                                                       | SHEARWALL SHEATHING                                      | 2X BOTTOM PLATE ATTACHMENT                        | ALLOWABLE SHEAR (PLF) |
| SW1                                                                                                                                                                                                                                                                                                                                                                                                         | 3/8" OR 15/32" PLYWOOD/ OSB SHEATHING W/ 8d NAILS @ 6-12 | 1/2" Ø ANCHOR BOLTS @ 32" O.C. (7" MIN EMBEDMENT) | 364                   |
| NOTES:<br>1. SHEAR ENTIRE EXTERIOR PER SW1, U.N.O. ON THE FOUNDATION PLAN<br>2. SEE ABOVE FOR FRAMING AND NAILING REQUIREMENTS OF WOOD STUD SHEAR WALL<br>3. ALL PLYWOOD PANEL EDGES SHALL BE BLOCKED W/ 2X FRAMING<br>4. USE 2 ANCHOR BOLTS MINIMUM AT SHEAR WALLS<br>5. PERFORATED SHEAR WALLS AROUND WINDOWS, STRAP HORIZONTALLY ABOVE AND BELOW OPENINGS W/ SIMPSON CS20 & EXTEND 12" MINIMUM EACH WAY. |                                                          |                                                   |                       |

| KING STUD SCHEDULE                             |             |             |              |              |  |
|------------------------------------------------|-------------|-------------|--------------|--------------|--|
|                                                |             |             |              |              |  |
| NUMBER OF KING STUDS REQUIRED (U.N.O ON PLANS) |             |             |              |              |  |
| OPENING WIDTH                                  | 8'-1" PLATE | 9'-1" PLATE | 10'-1" PLATE | 12'-1" PLATE |  |
| UP TO 4'-0"                                    | 1           | 1           | 2            | 2            |  |
| 5'-0"                                          | 1           | 2           | 2            | 3            |  |
| 6'-0"                                          | 2           | 2           | 3            | 3            |  |
| 8'-0"                                          | 2           | 3           | 3            | 3            |  |
| 10'-0"                                         | 3           | 3           | 4            | 4            |  |
| 12'-0"                                         | 3           | 3           | 4            | 4            |  |
| UP TO 4'-0"                                    | 1           | 1           | 1            | 1            |  |
| 6'-0"                                          | 1           | 1           | 1            | 1            |  |
| 8'-0"                                          | 1           | 1           | 1            | 1            |  |
| 10'-0"                                         | 1           | 1           | 1            | 2            |  |
| 12'-0"                                         | 2           | 2           | 2            | 2            |  |
| 14'-0"                                         | 2           | 2           | 2            | 2            |  |

GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C., INTERIOR WALLS USE 2X4 STUDS @ 16" O.C., UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER BEAMS/HEADERS SPANNING UP TO 6'-0" AND (2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO UNDERSIDE OF ROOF DECK. EXTEND SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011



SWENKA RESIDENCE  
12228 N 66TH ST

STRUCTURAL NOTES

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker


S000

Scale As indicated




GENERAL NOTES


- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011

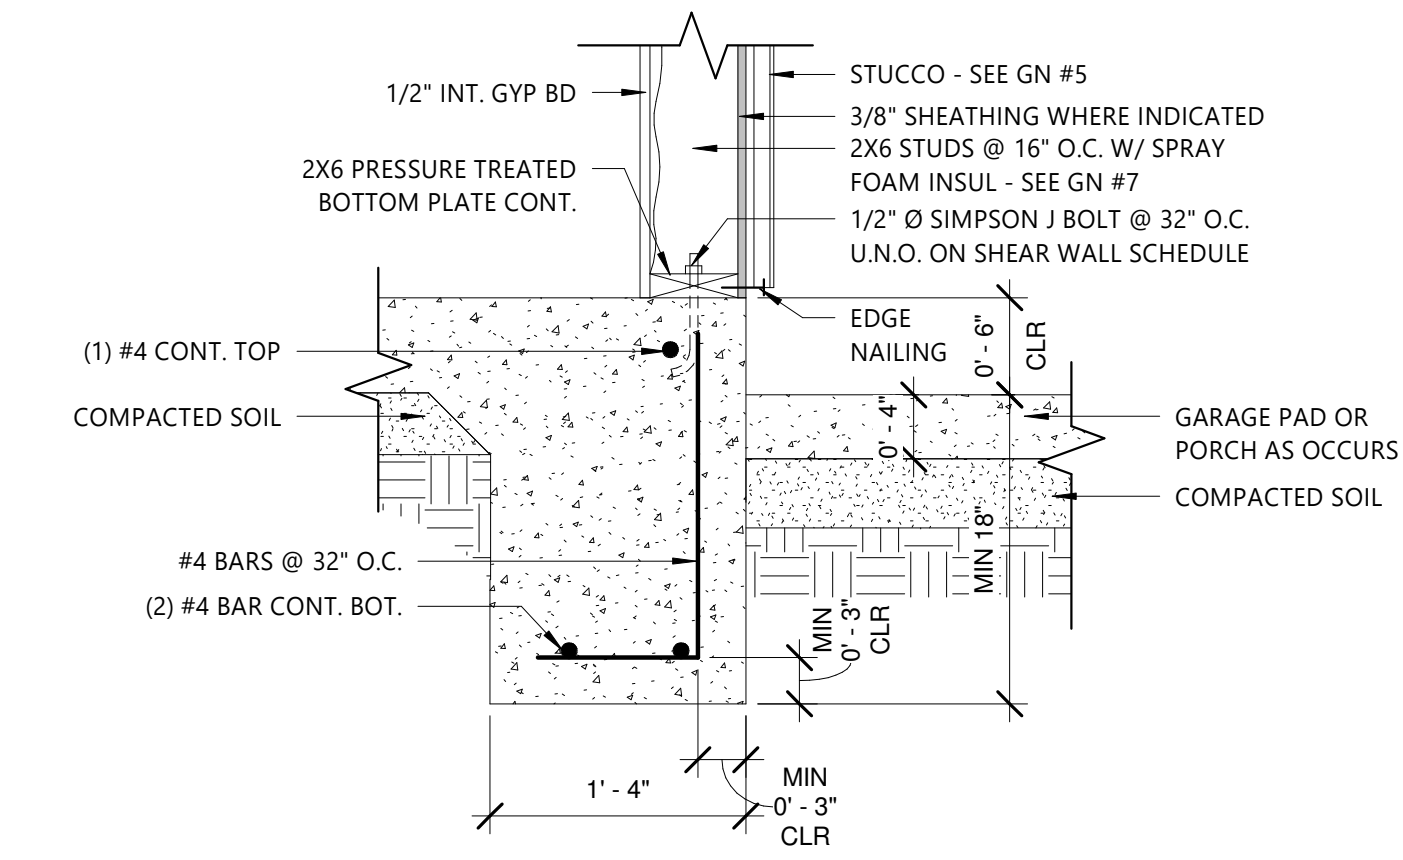


2 MONO POUR FOOTING  
1" = 1'-0"

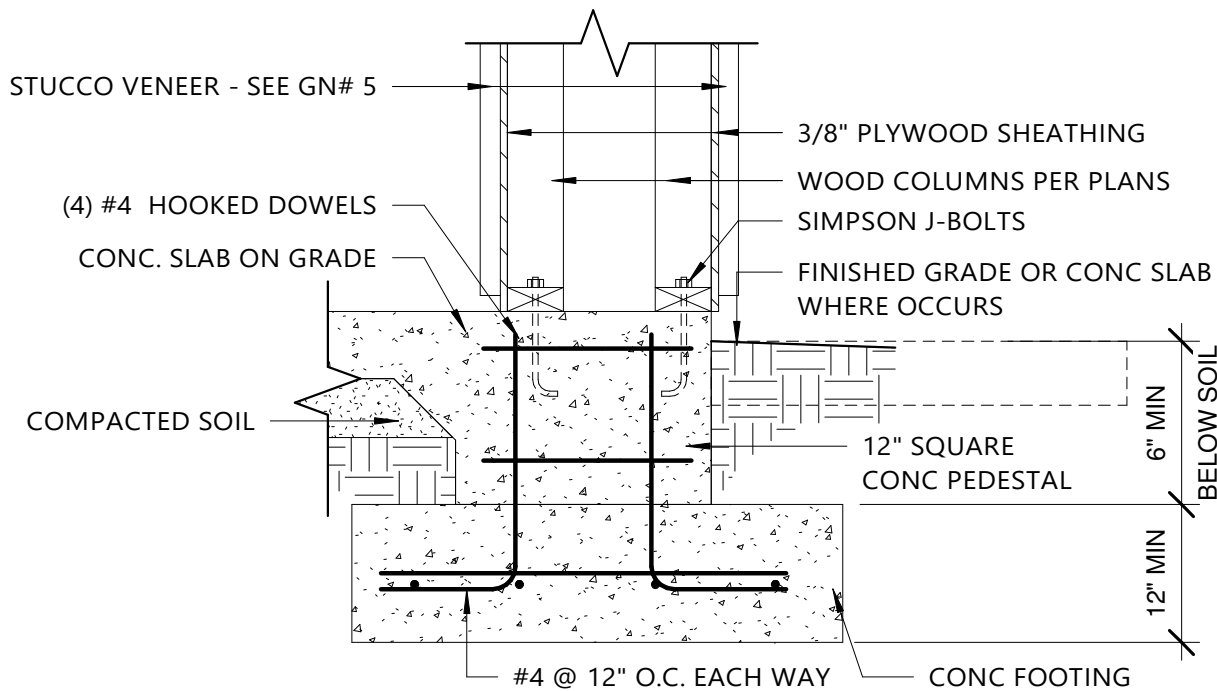

3 EXTERIOR WOOD SURROUND FOOTING  
1" = 1'-0"

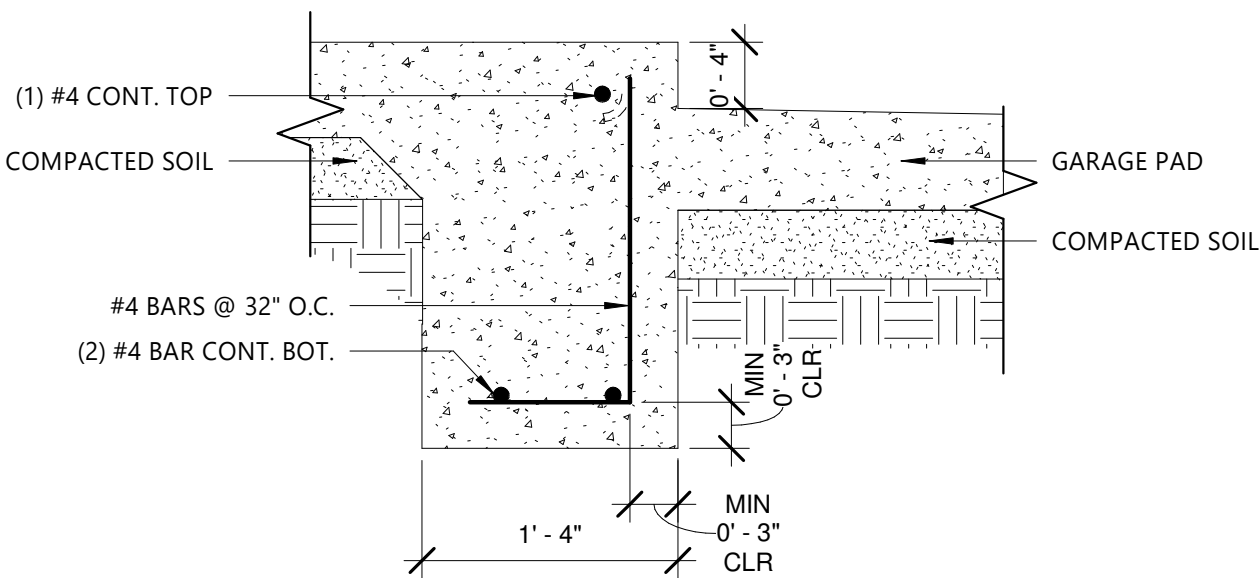


4 MONO POUR TRANSITION  
1" = 1'-0"

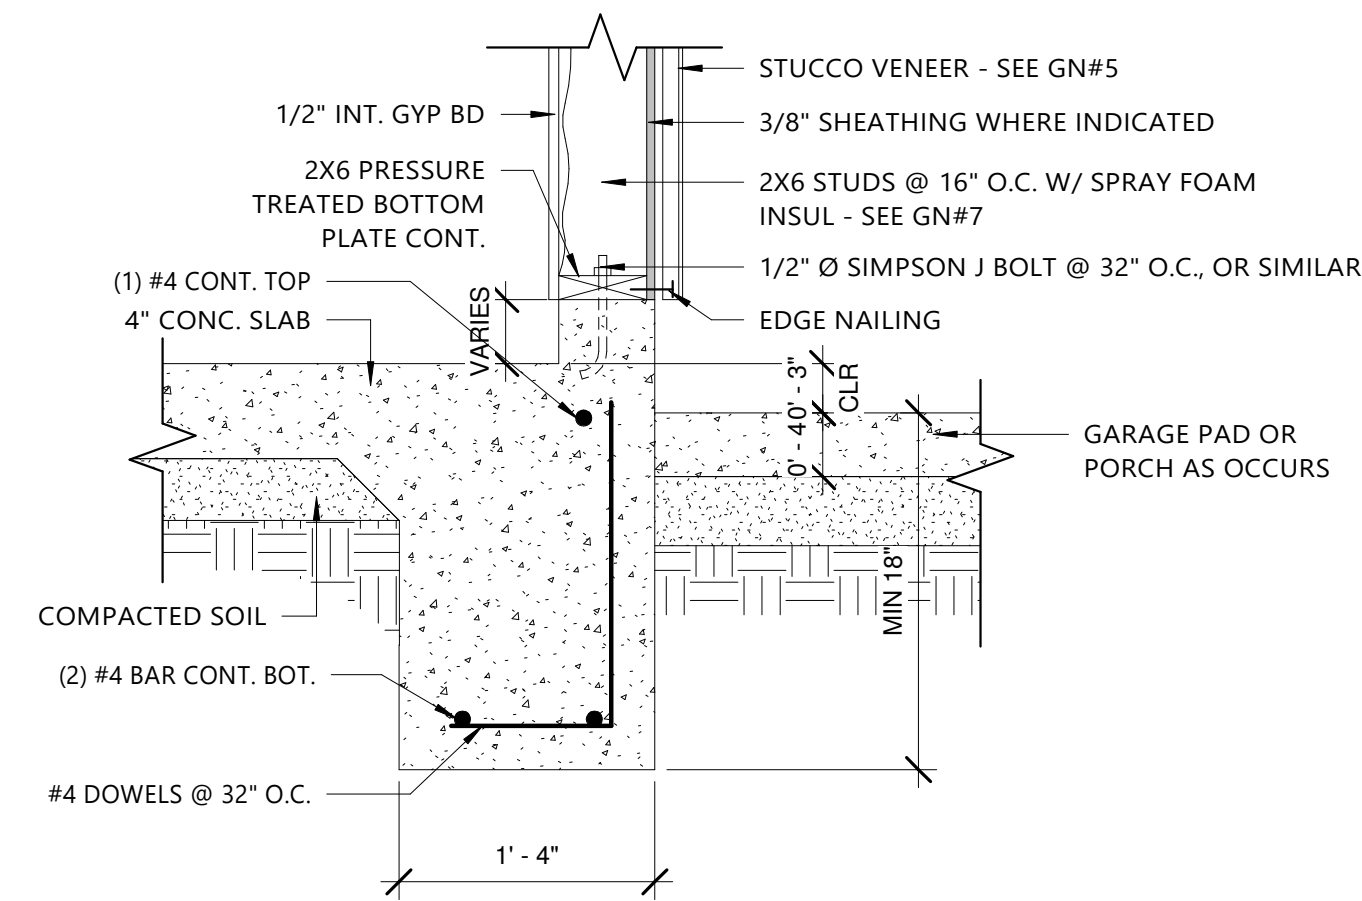


5 MONO-POUR GARAGE FOOTER  
1" = 1'-0"


- F1 24" SQ. X 10" DEEP W/ (3) #4 EACH WAY  
F2 30" SQ. X 10" DEEP W/ (3) #4 EACH WAY  
F3 36" SQ. X 10" DEEP W/ (4) #4 EACH WAY  
F4 42" SQ. X 12" DEEP W/ (4) #4 EACH WAY  
F5 48" SQ. X 12" DEEP W/ (5) #4 EACH WAY  
F6 54" SQ. X 16" DEEP W/ (5) #4 EACH WAY TOP & BOTTOM

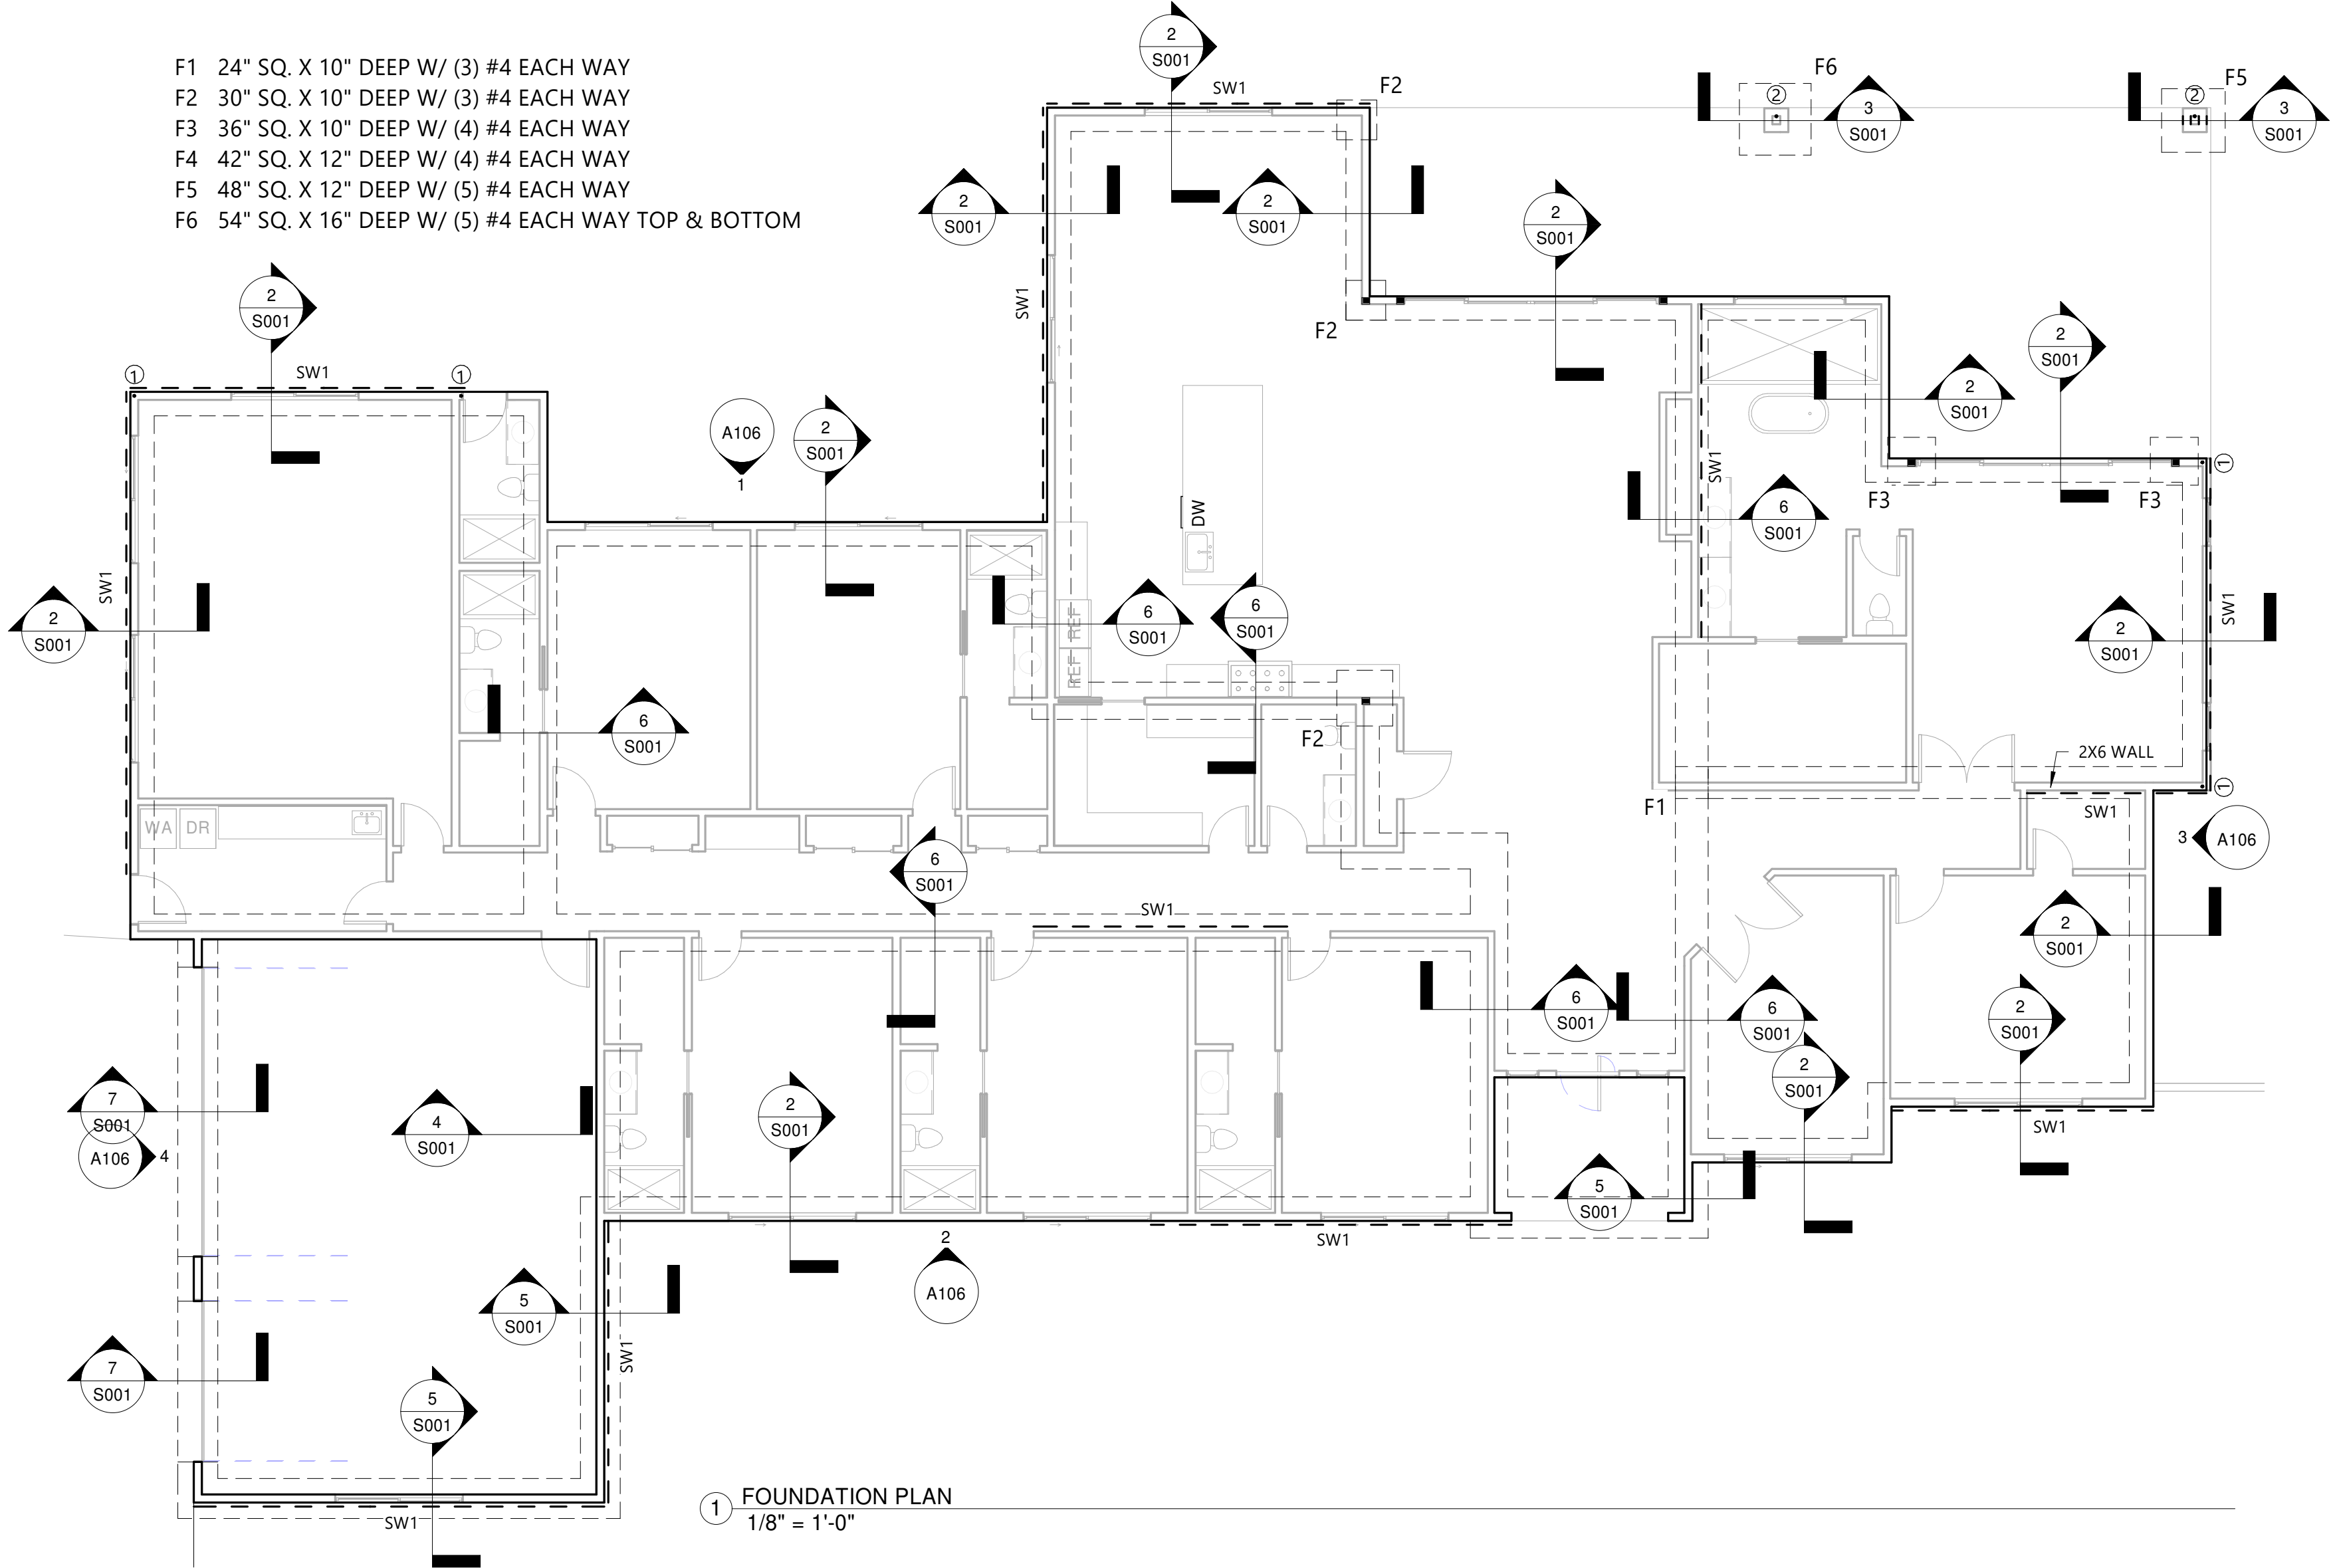

1 FOUNDATION PLAN  
1/8" = 1'-0"

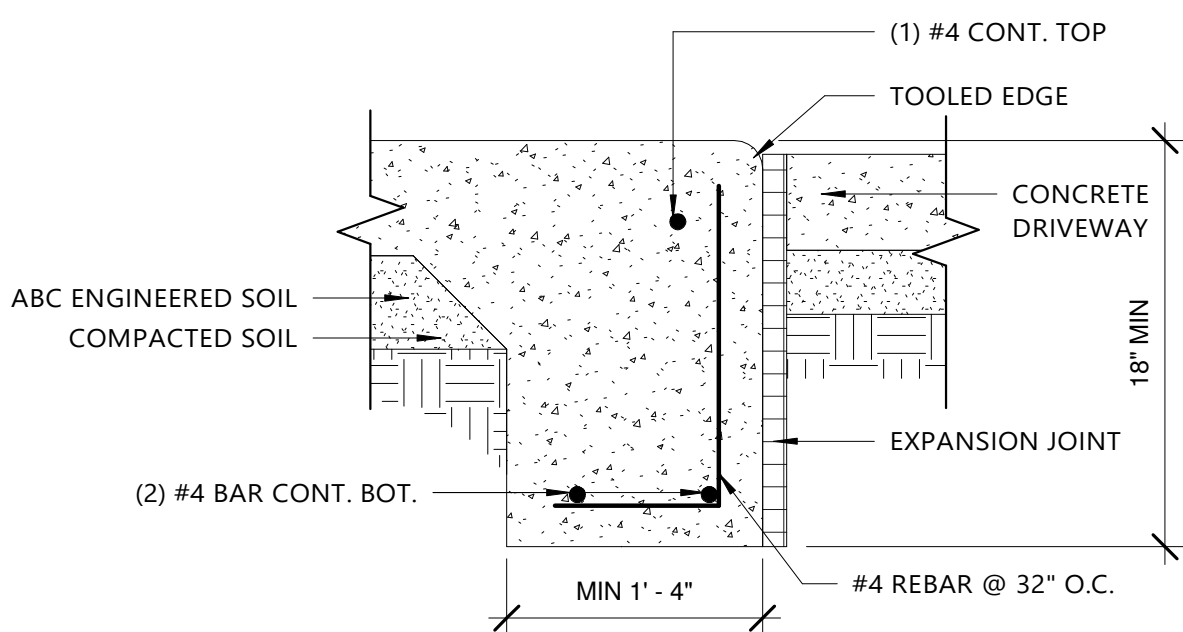

7 MONO-POUR GARAGE TURNDOWN  
1" = 1'-0"

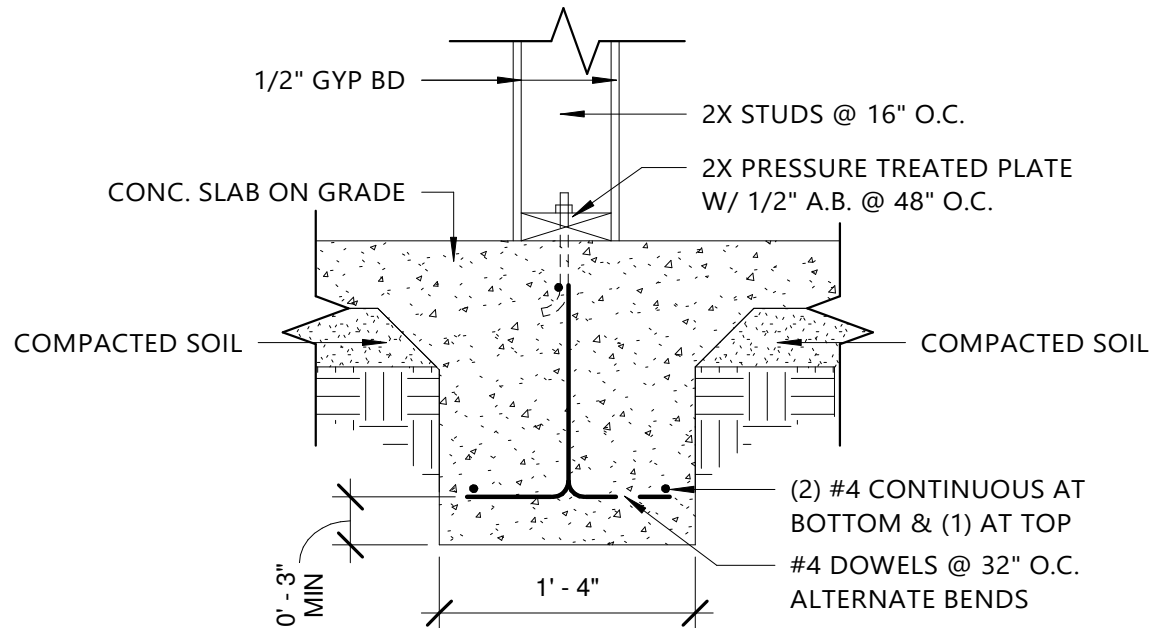

6 INTERIOR FOOTING SINGLE DETAIL  
1" = 1'-0"



SWENKA RESIDENCE  
12228 N 66TH ST


FOUNDATION PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker


S001

Scale As indicated




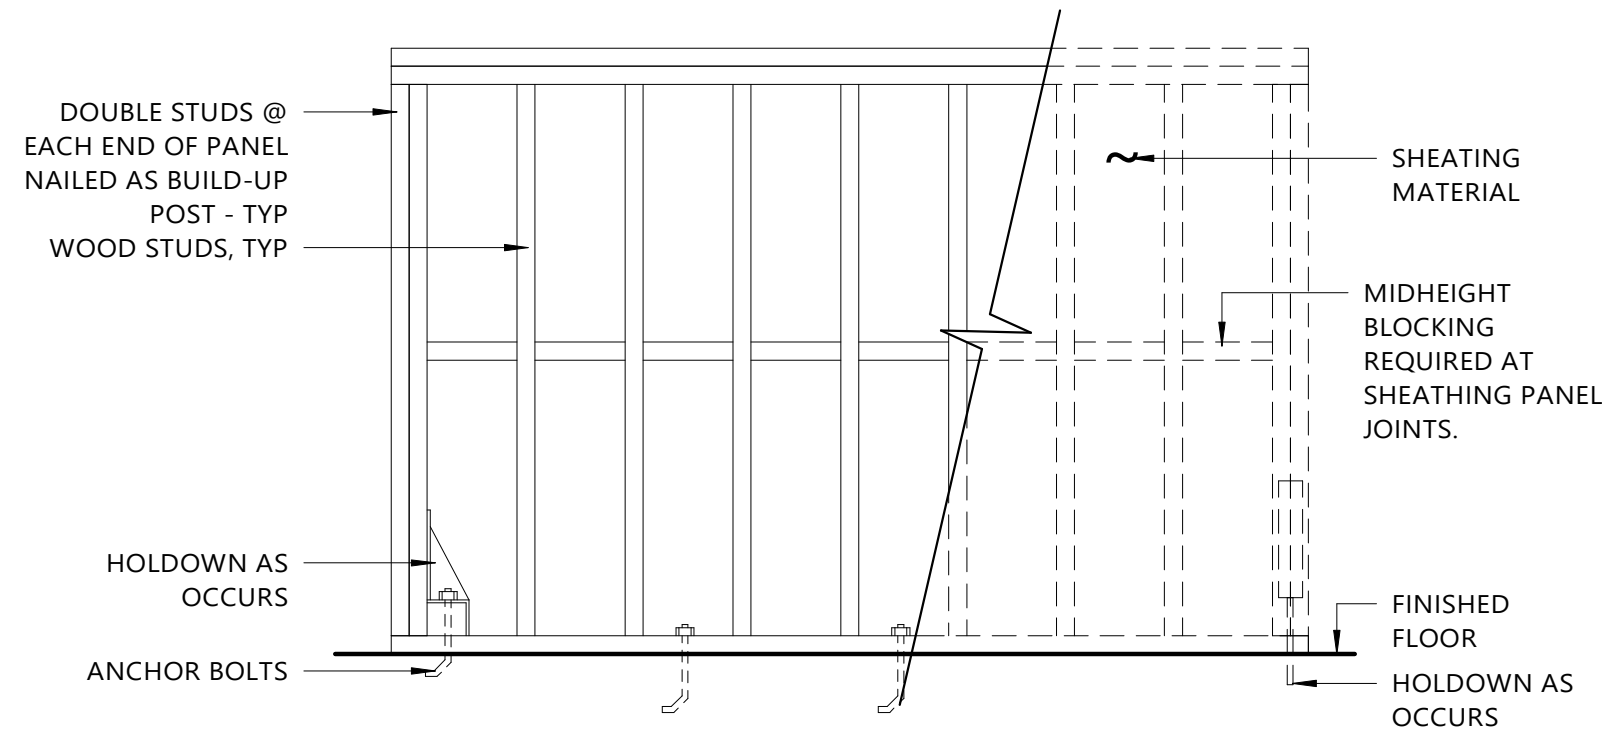

1 TYPICAL ONE-STORY SHEAR WALL  
3/4" = 1'-0"

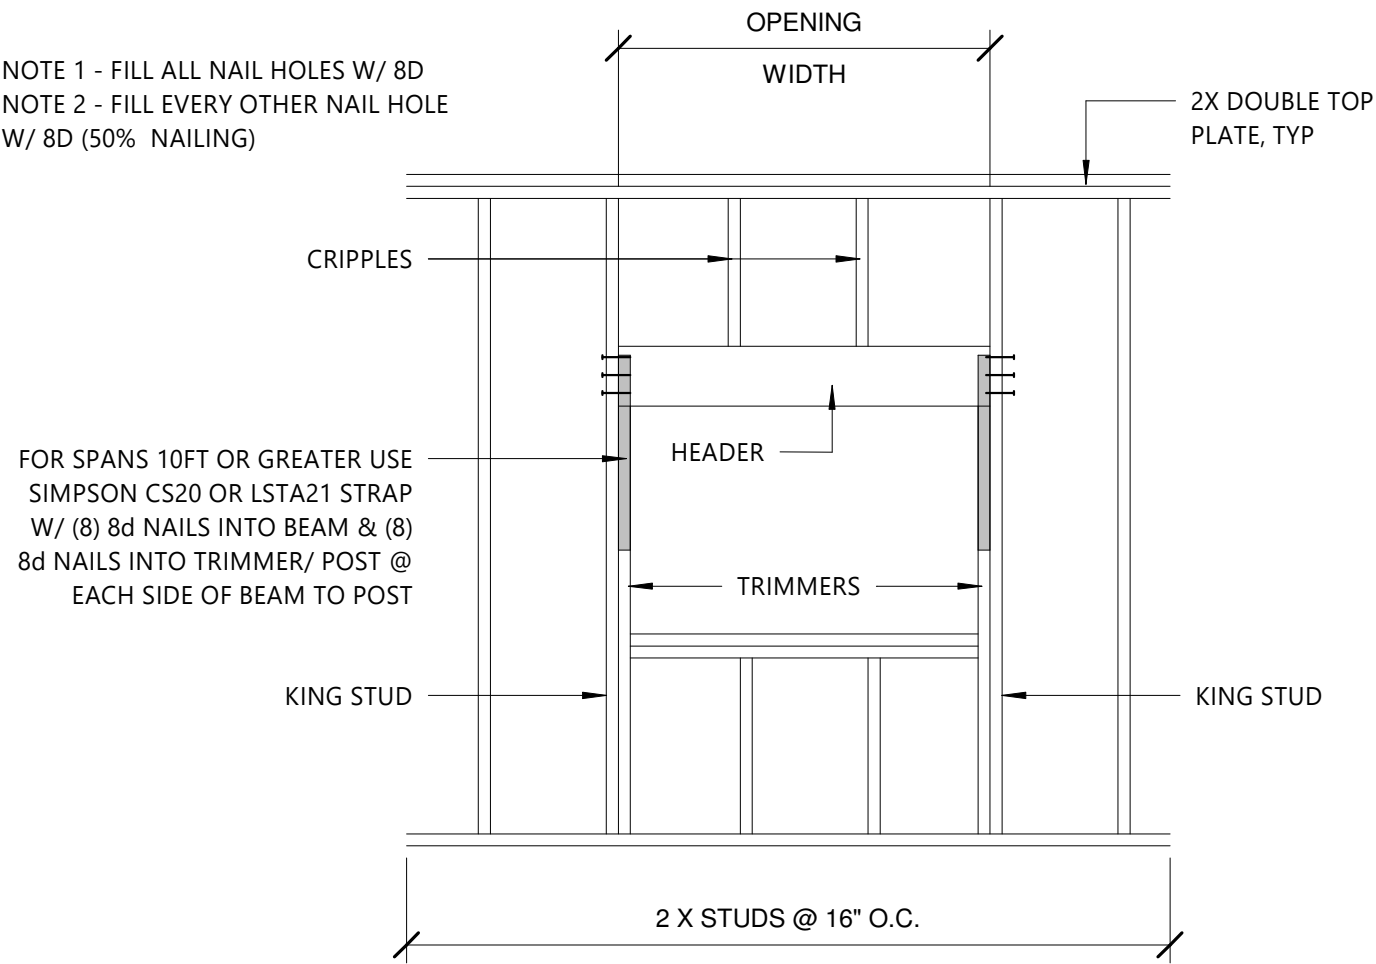


3 TYPICAL WALL OPENING DETAIL  
1/2" = 1'-0"

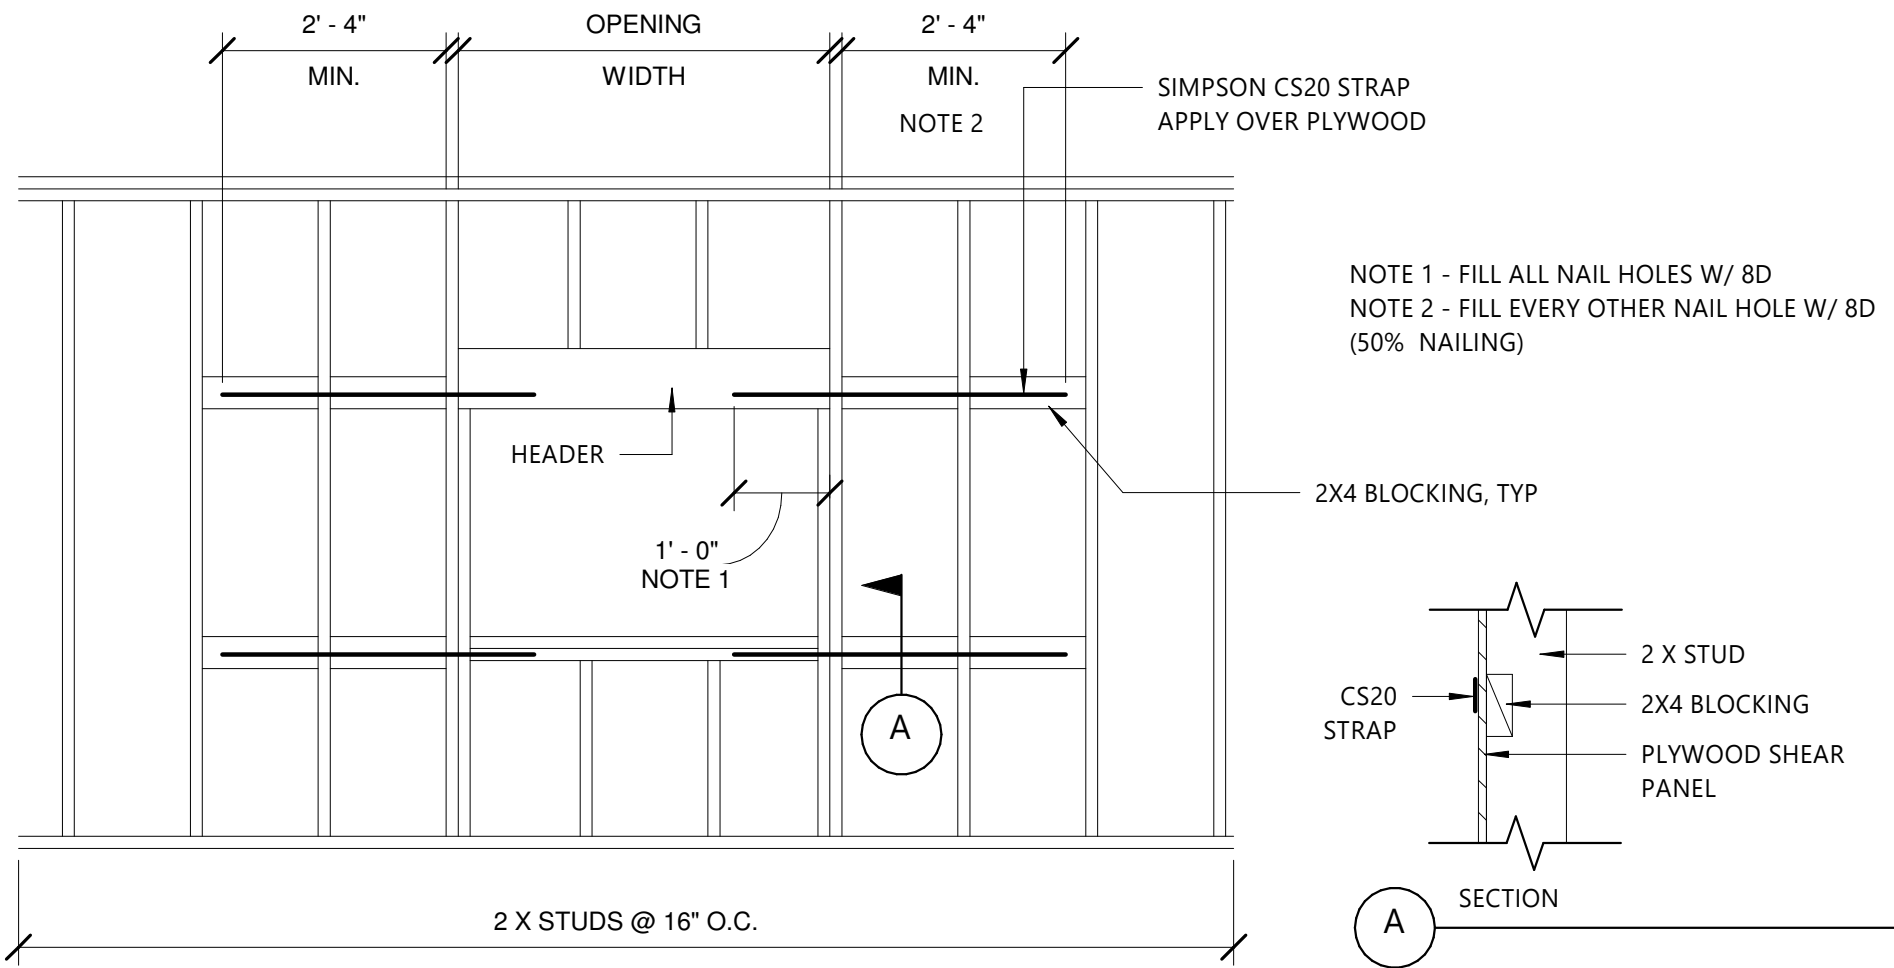

4 TYPICAL SHEAR WALL PENETRATION  
1/2" = 1'-0"

| CONNECTION                                 | NAILING                                                               | LOCATION                                          |
|--------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------|
| JOIST TO ALL SILL OR GIRDER                | (3) 8d COMMON (2-1/2" X 0.131")                                       | TOENAIL                                           |
| BRIDGING TO JOIST                          | (2) 8d COMMON (2-1/2" X 0.131")                                       | END NAIL, TOENAIL                                 |
| PLATE TO JOIST OR BLOCKING                 | 16d COMMON (3-1/2" X 0.162")                                          | 16" O.C. FACE NAIL                                |
| STUD TO TOP OR BOTTOM PLATE                | (2) 16d                                                               | END NAIL                                          |
| TOP PLATE TO STUD                          | (4) 8d COMMON (2-1/2" X 0.131")<br>(2) 16d COMMON (3-1/2" X 0.162")   | TOENAIL<br>END NAIL                               |
| DOUBLE STUDS                               | 16d COMMON (3-1/2" X 0.162")                                          | 24" O.C. FACE NAIL                                |
| DOUBLE TOP PLATES                          | (8) 16d COMMON (3-1/2" X 0.162") OR<br>(12) 16d BOX (3-1/2" X 0.135") | 16" O.C. FACE NAIL EA.<br>SIDE END JOINT (MIN 24" |
| TOP PLATE, LAPS AND INTERSECTIONS          | (2) 16d COMMON (3-1/2" X 0.162")                                      | LAP)                                              |
| CONTINUOUS HEADER, TWO PIECES              | 16d ALONG EACH EDGE                                                   | FACE NAIL                                         |
| CEILING JOISTS TO PLATE, TOE NAIL          | (3) 8d COMMON (2-1/2" X 0.131")                                       | 16" O.C. FACE NAIL                                |
| CONTINUOUS HEADER TO STUDS, TOE NAIL       | (4) 8d COMMON (2-1/2" X 0.131")                                       | EACH JOIST, TOENAIL                               |
| CEILING JOISTS, LAPS OVER PARTITIONS, FACE | (3) 16d COMMON (3-1/2" X 0.162")                                      | TOENAIL                                           |
| NAIL                                       | PER IBC TABLE 2308.7.3.1 - 3:12 @ 24" O.C. 28FT                       | FACE NAIL                                         |
| CEILING JOIST TO PARALLEL RAFTERS, FACE    | SPAN                                                                  |                                                   |
| NAIL                                       | (3) 10d COMMON (3" X 0.148")                                          | TOENAIL                                           |
| RAFTER OR ROOF TRUSS TO TOP PLATE          | 16d COMMON (3-1/2" X 0.162")                                          | 16" O.C. FACE NAIL                                |
| BUILT-UP CORNER STUDS                      |                                                                       |                                                   |

NAILING ALTERNATES - SEE 2018 IBC TABLE 2304.10.1

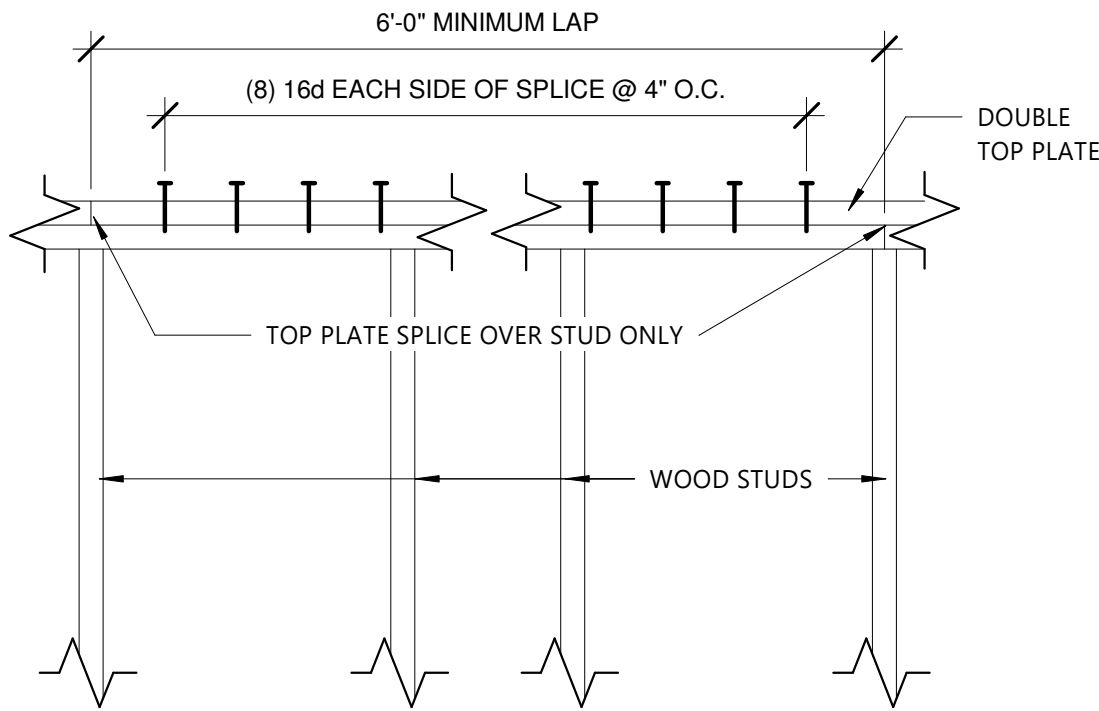

2 TYPICAL SPLICE OF TOP PLATE  
1 1/2" = 1'-0"

GENERAL NOTES

- DO NOT SCALE DRAWINGS
- EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- ONE KOTE STUCCO VENEER - ESR-1471
- GAF BUILT-UP FLAT ROOF - ESR-4676
- SPRAY FOAM INSULATION - CCRR-1011



SWENKA RESIDENCE  
12228 N 66TH ST

STRUCTURAL DETAILS

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker



S003

Scale As indicated




GENERAL NOTES


- 1 DO NOT SCALE DRAWINGS
- 2 EXTERIOR WALLS USE 2X6 STUDS @ 16" O.C.,  
INTERIOR WALLS USE 2X4 STUDS @ 16" O.C.,  
UNLESS NOTED OTHERWISE (U.N.O.)
- 3 PROVIDE (1) 2X6 TRIMMER STUD/POST UNDER  
BEAMS/HEADERS SPANNING UP TO 6'-0" AND  
(2) 2X6 STUDS AT LARGER OPENINGS, U.N.O.
- 4 AT ALL SHEAR WALLS, EXTEND SHEATHING TO  
UNDERSIDE OF ROOF DECK. EXTEND  
SHEATHING OVER TRUSS FACE AS REQUIRED.
- 5 ONE KOTE STUCCO VENEER - ESR-1471
- 6 GAF BUILT-UP FLAT ROOF - ESR-4676
- 7 SPRAY FOAM INSULATION - CCRR-1011

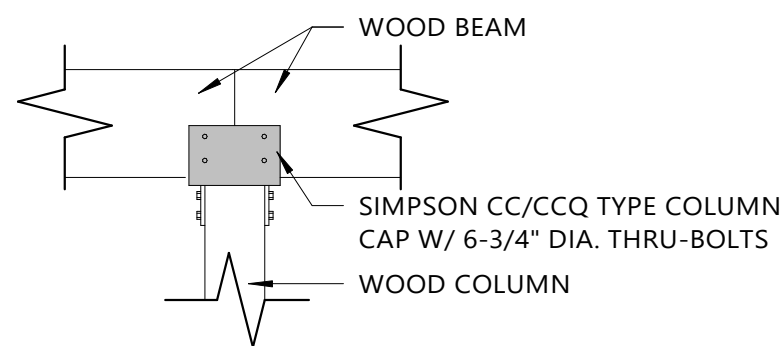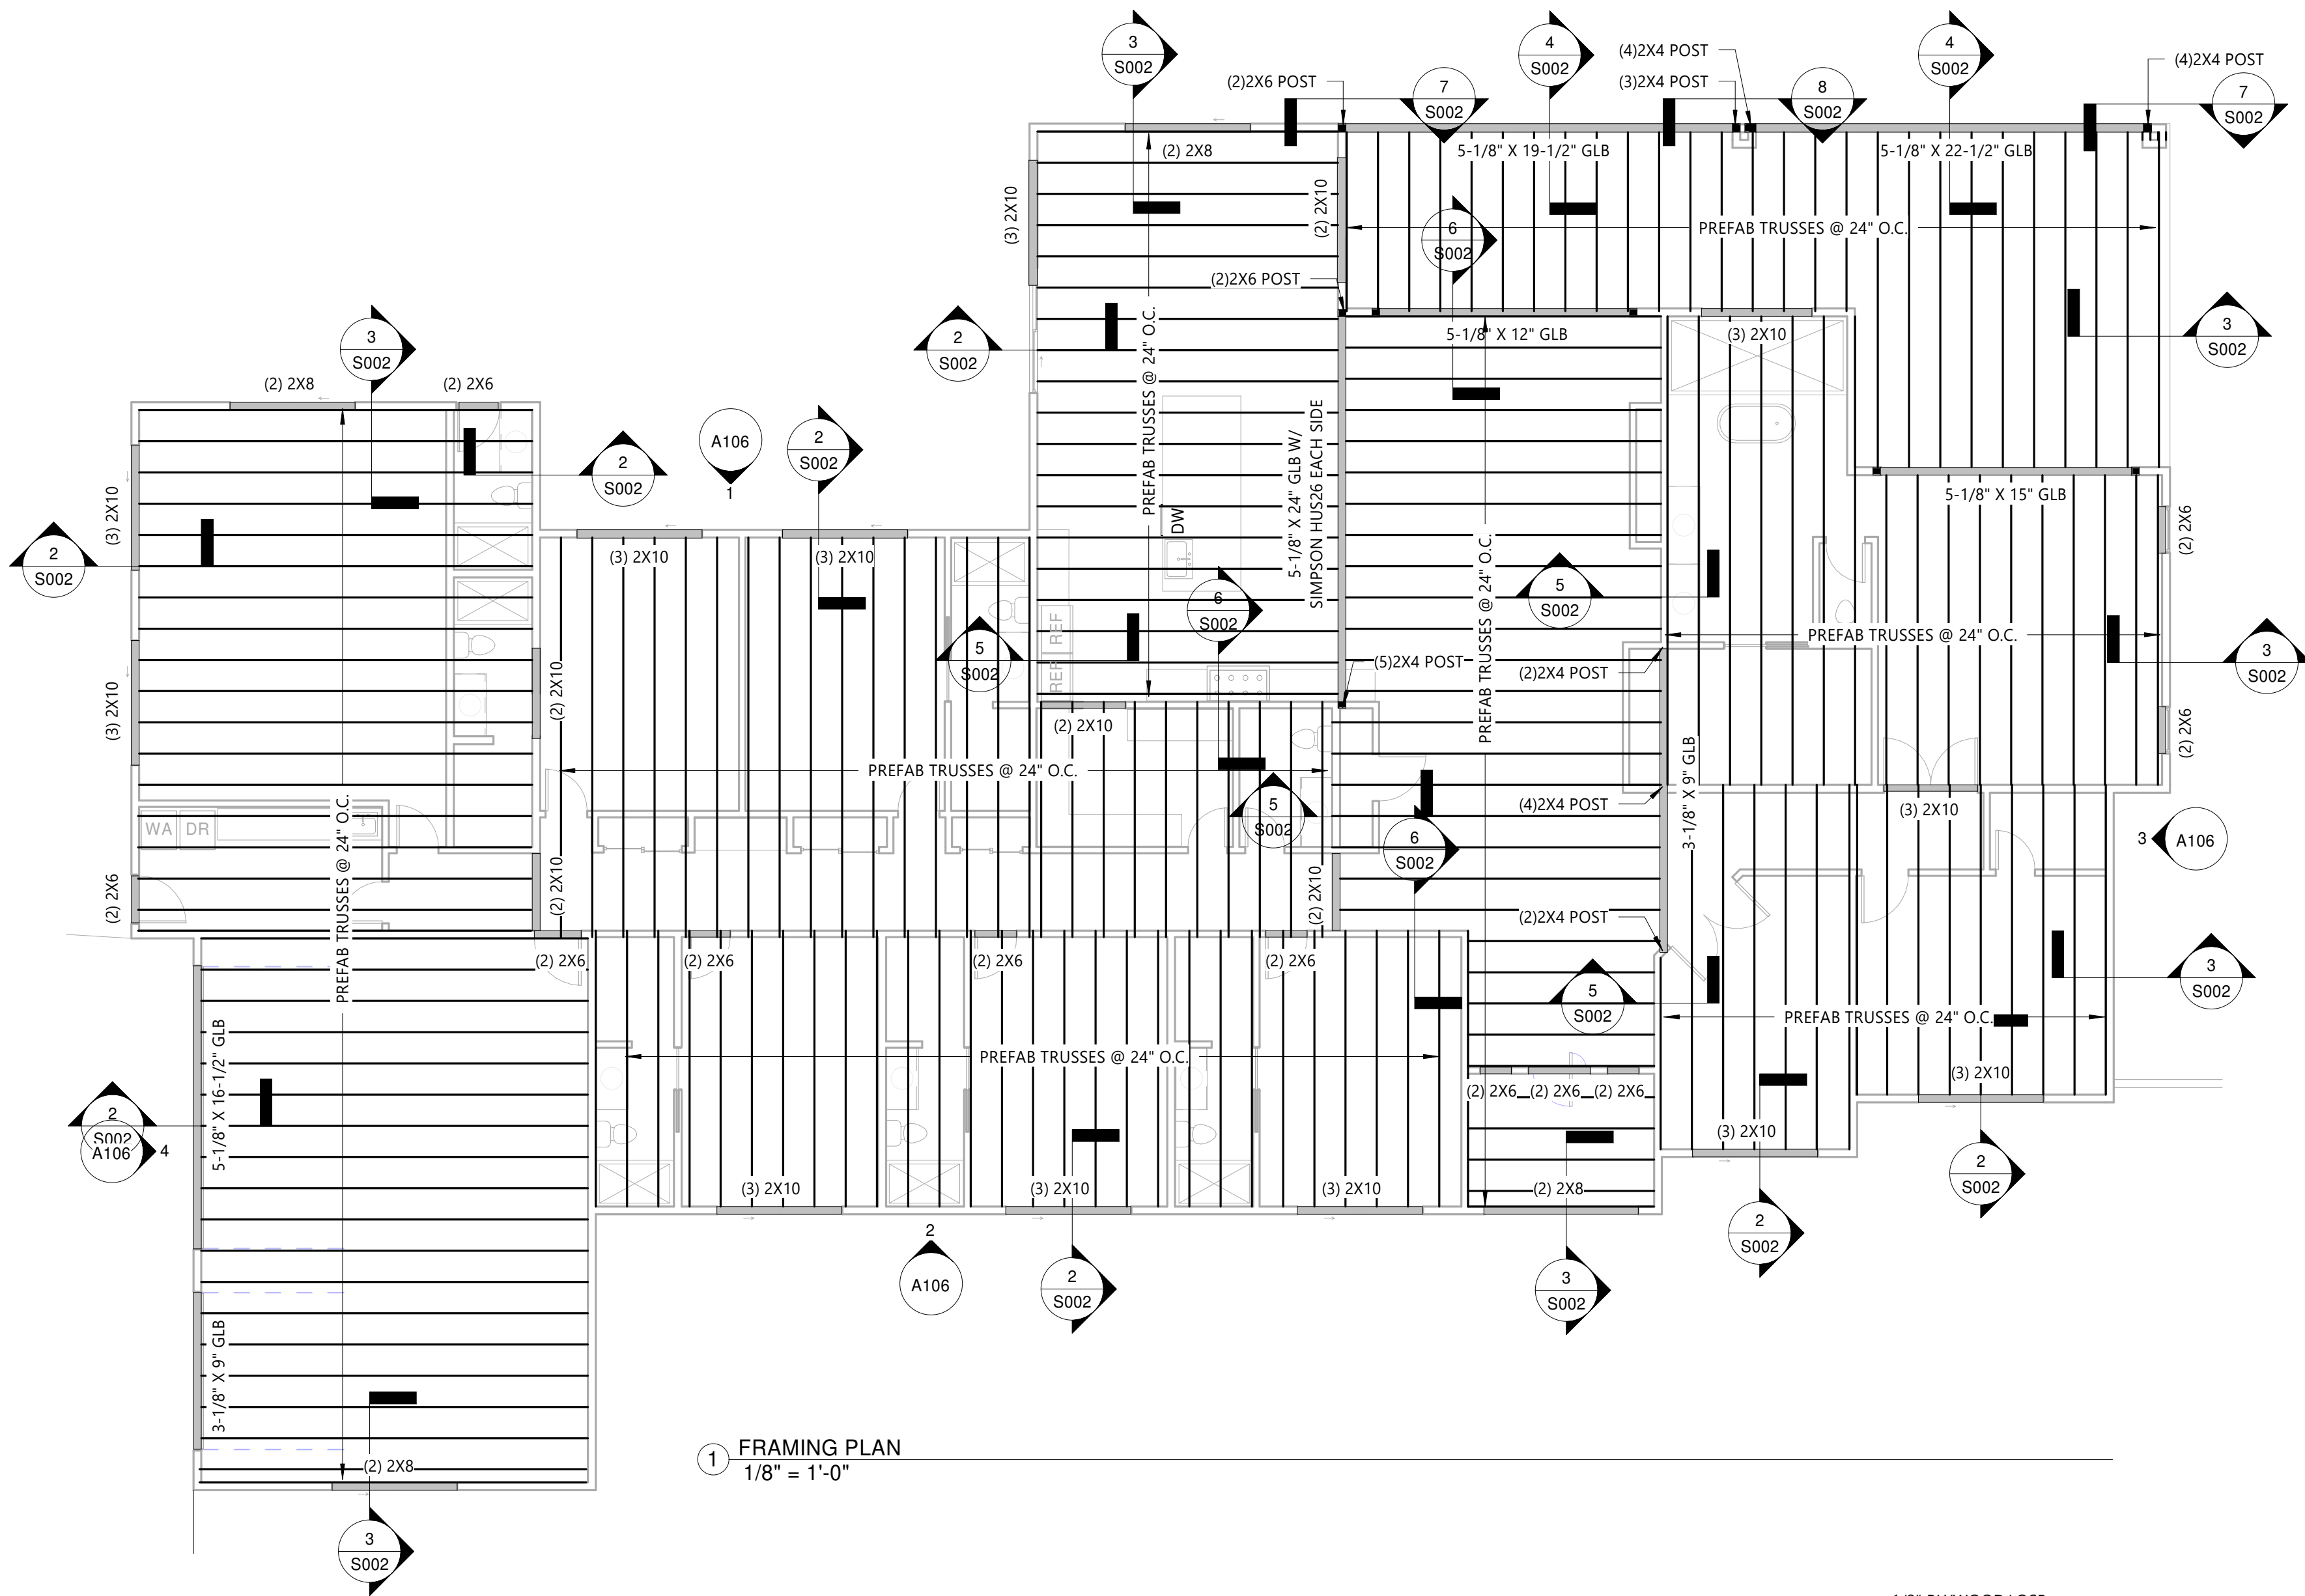


8 BEAMS TO POST CC CONNECTION  
1" = 1'-0"

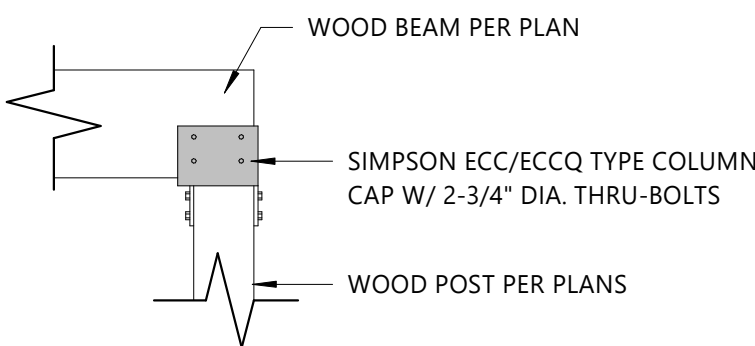


7 BEAM TO POST CC CONNECTION  
1" = 1'-0"

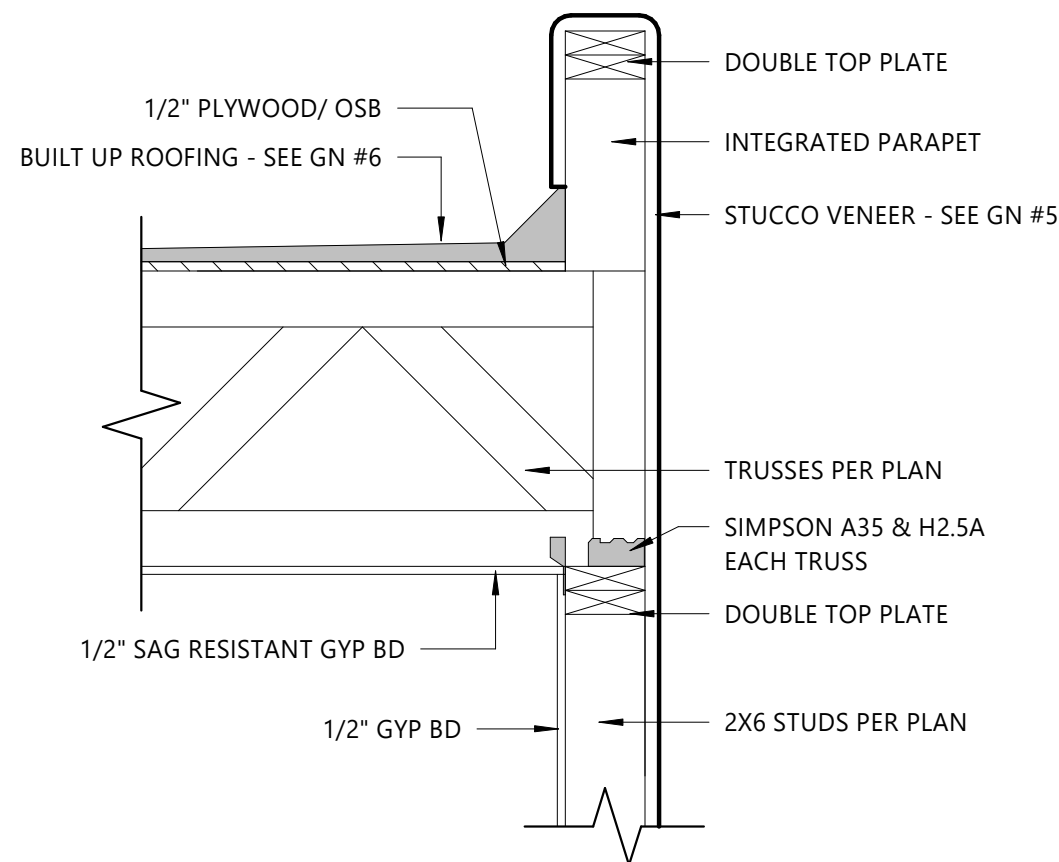


2 PARAPET DETAIL  
1" = 1'-0"

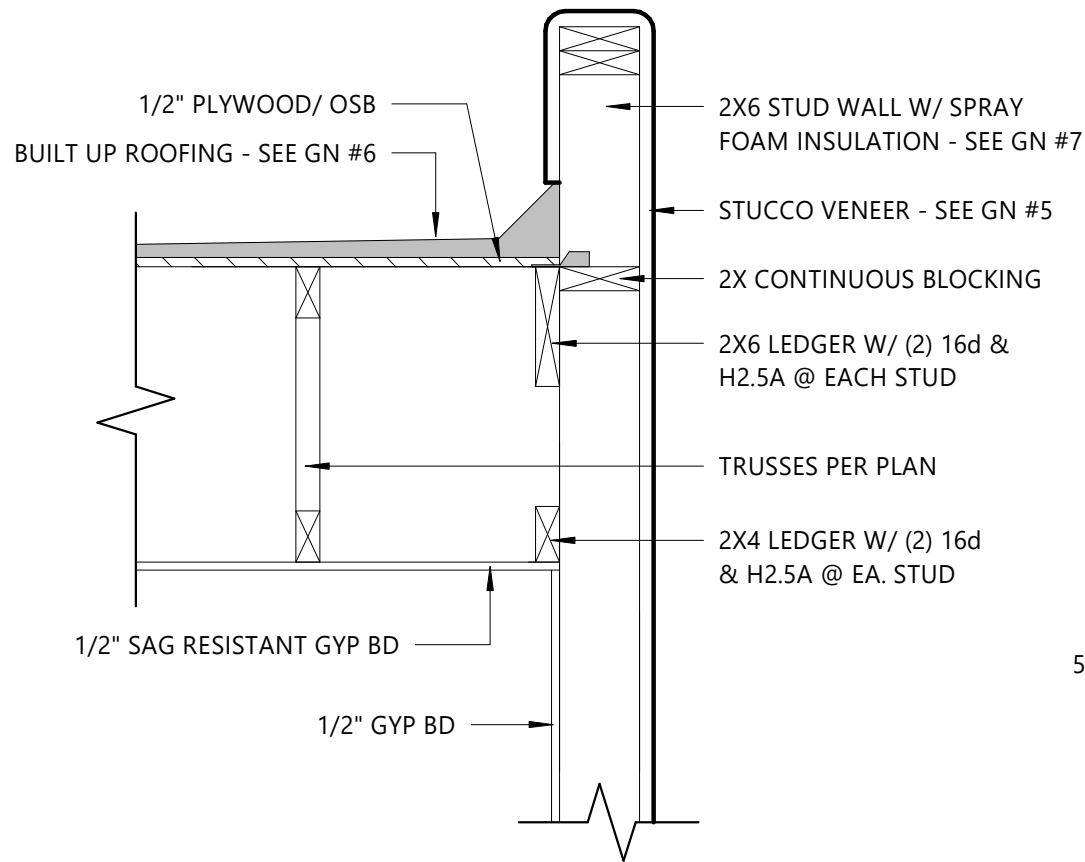


3 PARAPET LEDGER DETAIL  
1" = 1'-0"

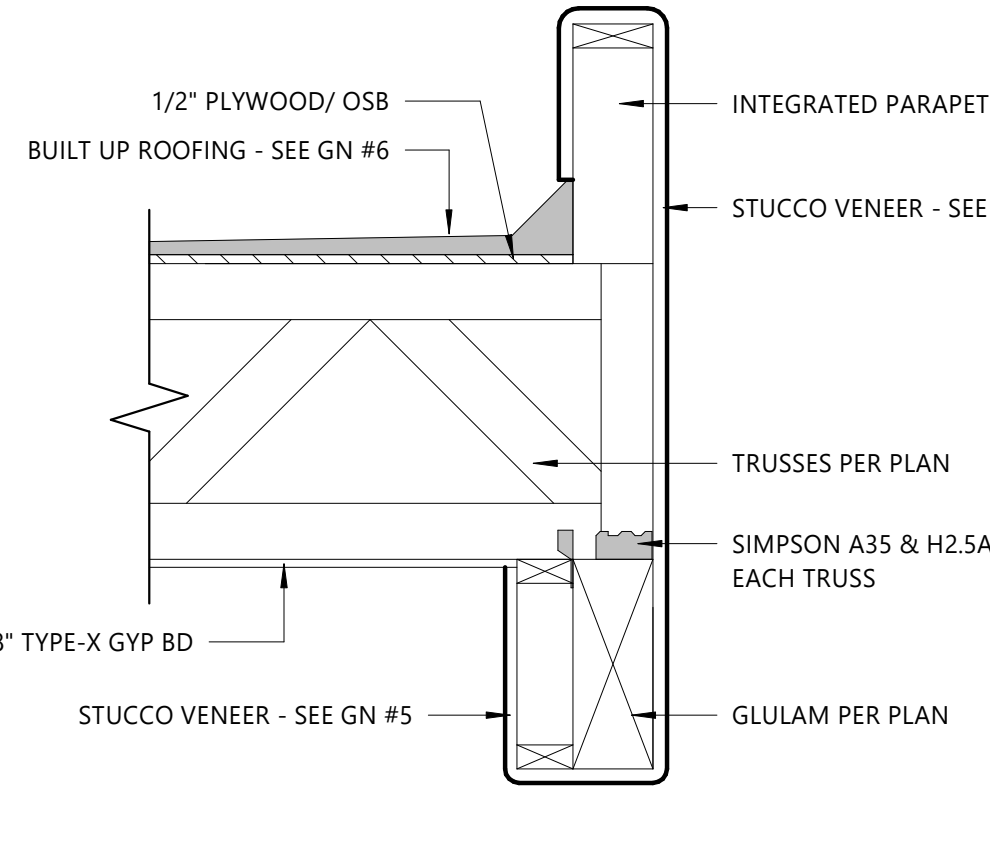

4 PARAPET BEAM DETAIL  
1" = 1'-0"

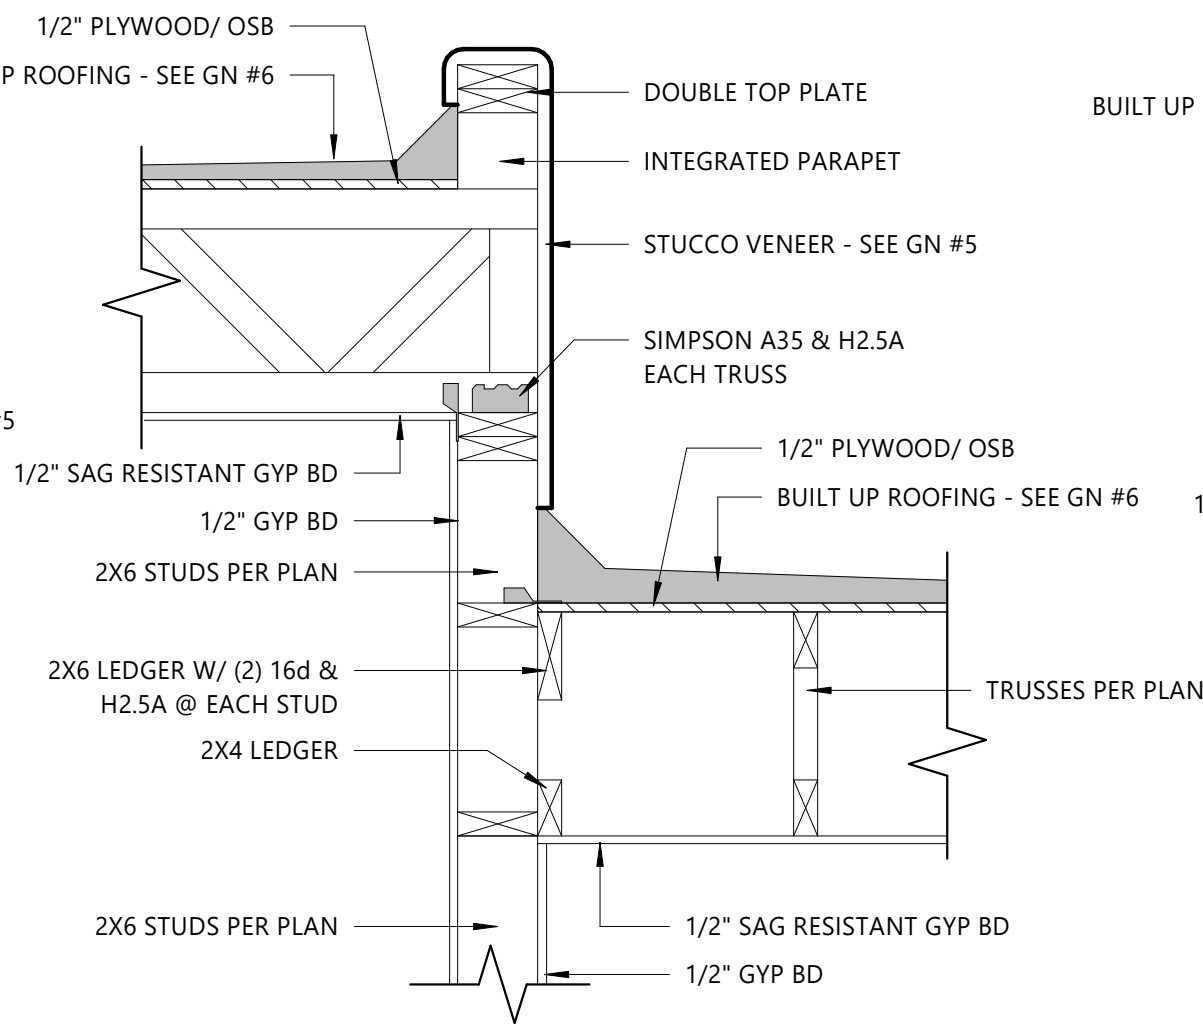

5 PARAPET HI TO LOW DETAIL  
1" = 1'-0"

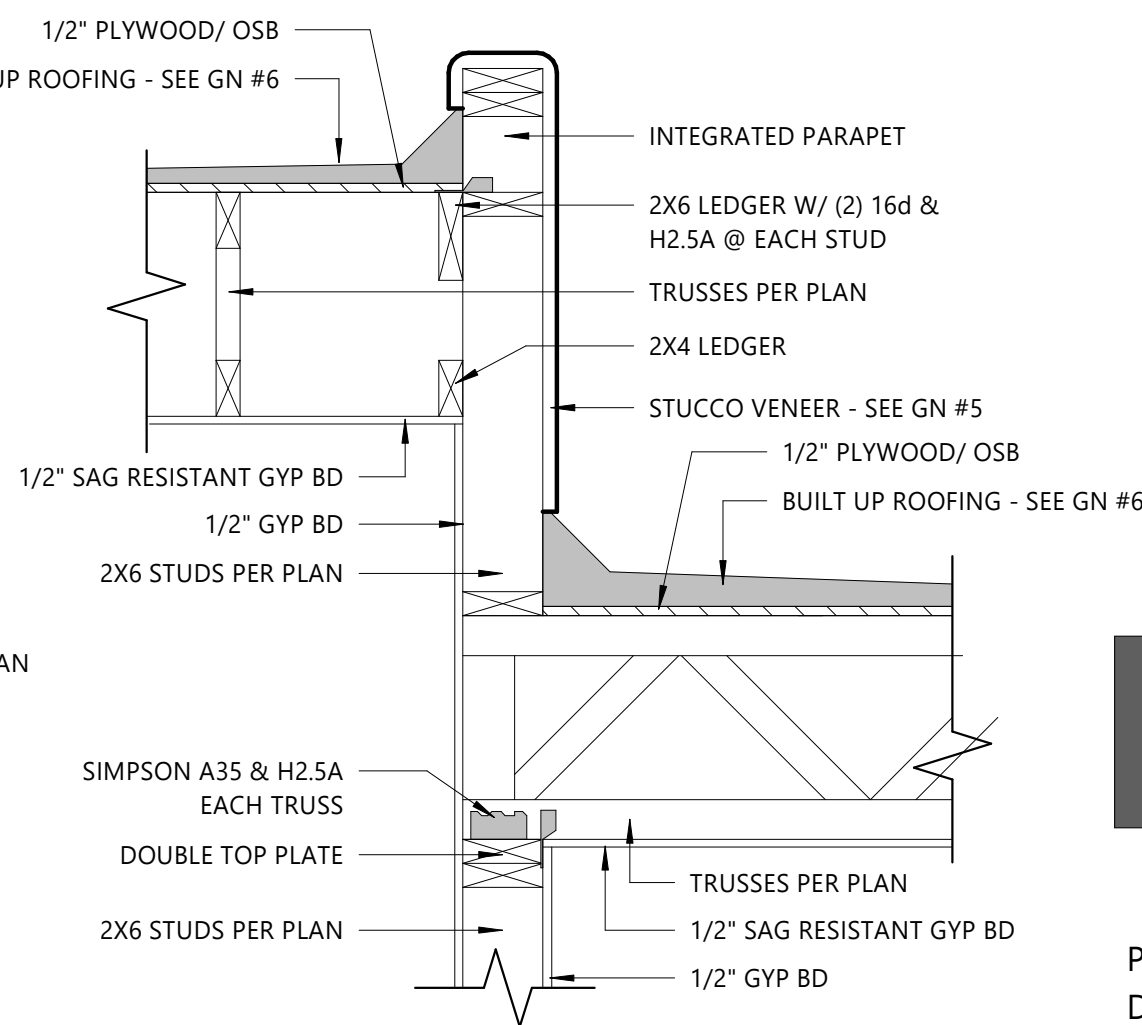

6 PARAPET HI TO LOW LEDGER  
1" = 1'-0"



SWENKA RESIDENCE  
12228 N 66TH ST

FRAMING PLAN

Project number 04003  
Date 08/31/2017  
Drawn by Author  
Checked by Checker

S002

Scale As indicated